

LPP - Laboratórne potreby  
Devätinova 42  
821 06 Bratislava  
Tel./fax: +421 2 4552 3801  
Email: info@labpo.sk

**LPP**  
*Laboratórne potreby*

---

[www.labpo.sk](http://www.labpo.sk)

Digital Indicators • Data Loggers • Bus systems • Remote Inquiry • Temperature Probes • Alarm Protection Devices • Software • EASYBus • Sensors • pH / Redox / Conductivity • Flow/ Flowrate • Level / Fill Level • Material Moisture • Temperature • Oxygen • Humidity • Pressure • etc.

# Industrial measurement 2013

## MEASURING CONTROLLING REGULATING



**GREISINGER**  
— electronic —



A subsidiary of  
**GHM**  
MESSTECHNIK



Greisinger electronic plant



Our EMC test laboratory

The GREISINGER electronic GmbH was founded in Regenstauf on January 1, 1980 and has now been existing for over 30 years.

Our aim is the development and production of measuring and control equipment including suitable sensors. Production occupies a working area of approx. 2250 m<sup>2</sup>. 50 employees develop and produce our high-quality but for all that low priced devices using the most up-to-date development, production and inspection equipment.

The company owns a fully equipped screen cabin (5 x 3 x 2.5 m) where EMC tests are performed already during the development of new products.

Furthermore to mention is the 60 m<sup>2</sup> air-conditioned calibration lab for calibration and adjustment of e.g. temperature, pressure, humidity products.

For many applications, especially considering the ISO9000ff documented measurings are necessary.

All our references can be traced back to national references and are permanently controlled.

Most of our products also can be ordered with Calibration or DKD Certificates to fulfill your quality requirements according to ISO9000.

## Quality Standard and Certification



Fair prices and high-quality products have made us a company to be reckoned with on the measuring device sector. Our development has been steadily going upwards for the past 30 years. Globally operating and well-known companies are now amongst our regular customers.

All our products are developed and produced in Germany - the only way to ensure the high-quality standard of our products. Our quality management system is certified according to ISO 9001:2008 and additionally for potentially explosive atmospheres according to EN 13980:2002.

Products intended for use in explosive atmospheres have to comply the requirements of the Directive 94/9/EC („ATEX-directive“) since July 1.st 2003.

Development, production and marketing are certified according to Directive 94/9/EC since May 1.st 2003. Several products are already examined and certified according to the Directive 94/9/EC.



# Product overview



## Service

Calibration, DKD

4 - 5

## HANDHELD INSTRUMENTS (with sensors and accessories)



Temperature	6 - 15	pH, Redox, Oxygen	33 - 39
Pt100 / Pt1000, Thermocouples	6 - 12	Gases, Carbon monoxide	40 - 44
Hay measuring probes	10	Pressure	45 - 57
Infrared	13 - 15	Anemometer, Phono, etc.	58 - 59
Air humidity, Flow rate	16 - 20	Accessories / Software	60 - 62
Material humidity	21 - 27		
Conductivity	28 - 32		

## INDUSTRIAL MEASUREMENT



<b>Display / Controller</b>	<b>63</b>
Display instruments for control panel mounting	64 - 73
Regulator for control panel mounting	66, 67, 70 - 75
Plug-on display Special construction	76 - 77
Special construction, Power supply, Accessories	78 - 79
Panel-mounted modules (Temperature, Pressure, Current, Voltage)	80



<b>Data logger / EASYBus</b>	<b>81</b>
Data logger	82 - 86
EASYBus overview	87
EASYBus sensor modules	66, 69, 88 - 91
EASYBus regulators	66, 70 - 72, 92 - 93
EASYBus accessories and software	62, 94 - 98



<b>Transmitter / Sensors</b>	<b>99</b>
Transmitters	100 - 115
Temperature, Humidity, Pressure, Conductivity, Redox, pH, O <sub>2</sub> , CO, CO <sub>2</sub> , Flow	
Flow meter, Flow switch, Level switch, Rotational speed meter	116 - 121



<b>Temperature probes</b>	<b>122</b>
Pt100 / Pt1000, Thermocouples	123 - 137



<b>Alarm- and Protection devices</b>	<b>138</b>
Alarm- and Control devices (Liquid level, Leakage)	139 - 145



<b>Ex-Protection</b>	
Measuring instruments (Pressure)	48 - 53
Displays	64, 76
Transmitters	106
Temperature probes	131

Handheld instrument

Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

for return to national standards		
1. Readjustment	2. Factory Calibration Certificate	3. DKD Calibration Certificate
After a longer period of use, it's recommendable to send in the devices (e.g. humidity) for readjustment. At this, the device will be fully checked up and new adjusted, if required.	DIN EN ISO 9000ff demands a traceable calibration of measuring and test equipment. This calibration certificate is a low-priced alternative to the DKD Calibration Certificate.	The DKD Calibration Certificate always conforms to form, structure and procedures the standards and requirements of the German Calibration Service according DIN EN ISO 17025.




## Which certificate will be required ?

**Factory Calibration Certificate:** could be deemed to be sufficient, if the devices acts as measuring and test equipment within quality management systems according to DIN EN ISO 9000ff or similar, as long as there are not used as a standard. Furthermore there are some measurement categories, without possibility to get a DKD accreditation.

**DKD-Calibration Certificate** will be recommended for the recalibration of testing equipment which itself is used as a standard for the monitoring of other measuring and test equipment. It's also possible that internal demands of the particular companies makes a DKD Calibration Certificate necessary.

## 1. Readjustment: (without certificate of calibration) Readjustment of the device

## 2. Factory calibration certificate:

Calibration certificates are available for all handheld instruments marked with the symbol . Also possible for measuring transmitters resp. combinations of display instruments and sensors/transmitters.

### Temperature:

#### Certificate of calibration WPT

incl. 1 meas. point

**additional meas. point** (from -30 to +500°C)

**additional meas. point** (>500 to 1300°C)

#### Certificate of calibration WPT2A

with standard values: 0°C / +70°C

#### Certificate of calibration WPT2B

with standard values: 0°C / +37°C

#### Certificate of calibration WPT3

with standard values: -20°C / 0°C / +70°C

### Pressure:

#### Certificate of calibration WPD5

5 points ascending, 5 points descending

#### Certificate of calibration WPD10

10 points ascending, 10 points descending

### Humidity:

#### Certificate of calibration WPF4

incl. standard-meas. values (approx. 20% / 40% / 60% / 80 % RH

increasing and decreasing; measuring point Temperature: approx. 23 °C)

### Conductivity:

#### Certificate of calibration WPL3

3 points: ~147 µS/cm, ~1412 µS/cm, ~12,90 mS/cm

#### Certificate of calibration WPL10

10 points from 0.9 µS/cm to ~192 mS/cm

### Ultrapure Water:

#### Certificate of calibration WPL3-RW

3 points: ~2,50 µS/cm, ~7,00 µS/cm, ~15,00 µS/cm

### pH:

#### Certificate of calibration WPP3

3 points: 4,00 pH, 6,87 pH, 9,18 pH

#### Certificate of calibration WPP10

10 points from 1.09 pH to 12.75 pH

### Atmospheric Oxygen:

#### Certificate of calibration WPO3

3 points: 0 / 20.9 / 100 % O<sub>2</sub>

Note: a replacement of the sensor, before issue the WPO3, is recommended for sensors with an age of one year!

€

## 3. DKD calibration certificates (according DIN EN ISO / IEC 17025) guiding price - exact costs on request.

### Temperature:

**DKD-certificate** (incl. 1 meas. point)

**additional meas. points** (from -80 to +500°C)

### Pressure:

(for each order a add. handling charge of € 25,-- must paid)

#### Over pressure -1...100 bar

(incl. 9 points increase and decrease)

#### Absolute pres. 0...70 bar

(incl. 9 points increase and decrease)

### Humidity: (incl. 1 temperature value)

**for devices with external sensor**

(Testing points: 15 %RH and 70 %RH / at 23 °C)

**for devices with fixed attached sensor**

(Testing points: 20 %RH, 50 %RH and 80 %RH / at 20 °C)

For the storage of the devices, we recommend the use of a safe-keeping case

# Calibration and Testing

## Complete Solutions: **Komplett**



**GTH175/Pt - WPT2** (immersion probe)  
incl. certificate of calibration WPT2A (0°C / 70°C) and case GKK252.



**GTH175/Pt - WPT3** (immersion probe)  
incl. certificate of calibration WPT3 (-20 / 0 / +70°C) and case GKK252.

**GTH175/Pt-E - WPT3** (insertion probe)  
incl. certificate of calibration WPT3 (-20 / 0 / +70°C) and case GKK252.

**GTH1170 incl. GTF900 - WPT**  
incl. certificate of calibration WPT (with meas. points: 0 / 100 / 250 / 500°C) and case GKK1100.

**GFTH200 - WPF4**  
incl. certificate of calibration WPF4 (~20% / ~40% / ~60% / ~80%RH increasing and decreasing) and case GKK252.

**GMH3330 incl. TFS0100E - WPF4**  
incl. certificate of calibration WPF4 (~20% / ~40% / ~60% / ~80%RH ascending / descending) and case GKK3500.

**GMH3161-07/-12/-13 - WPD5**  
incl. certificate of calibration WPD5 (5 points ascending / descending) and case GKK3000.

## Novelties

material humidity



**BaleCheck 100**

page 26

material humidity



**GMR 110**

page 26

climate & CO<sub>2</sub>



**AirCheck 100**

page 44

temperature



**GTH 200 air**

page 10

climate



**GFTB 200**

page 20

temperature



**MT 400**

page 14


temperature



**ST 512**

page 15

liquid level



**GMNV-1C**

page 144

pressure



**GMUD-MP**

page 110

# Temperature handheld instruments



Application:	Device	GMH 3710	GMH 3750	GMH 2710	GMH 2710-K	GTH 175/Pt	GTH 175/Pt-E	GTH 175/Pt-K	GMH 175	GTH 200 air	GMH 3210	GMH 3230	GMH 3250	GTH 1150	GMH 1150	GTH 1170	GMH 1170
Reference- / precision measurement		✓	✓														
Quality management		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓
Difference meas.												✓	✓				
Surface measurement											✓	✓	✓	✓	✓	✓	✓
Core temperature measurement		✓	✓		✓			✓									
High-temperature measurement		✓	✓								✓	✓	✓	✓	✓	✓	✓
Food, HACCP		✓	✓	✓	✓	✓	✓	✓			✓	✓	✓				
Water-proof				✓	✓												
Air- / gas- / liquids-measurement		✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓
indoor temperature										✓							

Function / Equipment:	Device	GMH 3710	GMH 3750	GMH 2710	GMH 2710-K	GTH 175/Pt	GTH 175/Pt-E	GTH 175/Pt-K	GMH 175	GTH 200 air	GMH 3210	GMH 3230	GMH 3250	GTH 1150	GMH 1150	GTH 1170	GMH 1170	
<b>Technische Daten</b>																		
Sensor element		Pt100	Pt100	Pt1000	Pt1000	Pt1000	Pt1000	Pt1000	Pt1000	Pt1000	J, K, N, S, T	J, K, N, S, T	J, K, N, S, T	K	K	K	K	
(max.) Meas. range [°C]		-200..+850	-200..+850	-200..+200	-200..+250	-199..+199	-199..+199	-199..+199	-199..+199	-20..+70	-220..+1750	-220..+1750	-220..+1750	-50..+1150	-50..+1150	-65..+1150	-65..+1150	
Accuracy (typ.)		≤ 0,03 °C		± 0,1 °C		± 0,1% v. MW.			± 0,1°C	± 0,5% v. MW. ± 0,1°C	± 0,03% v. MW. ± 0,05% FS (Bsp. für Typ K)			≤ 1%		± 0,05% v. MW. ± 0,2% FS.		
Resolution [°C]		0,01 / 0,1	0,01 / 0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1 / 1	0,1 / 1	0,1 / 1	1	1	1	1	
Plug-in probe		✓	✓						✓		✓	✓	✓	✓	✓	✓	✓	
Meas. inputs		1	1	1	1	1	1	1	1	1	1	2	2	1	1	1	1	
Display rows		2	2	2	2	1	1	1	1	1	2	2	2	1	1	1	1	
<b>Funktionen:</b>																		
Min/Max, Hold, Auto-Off		✓	✓	✓	✓					✓	✓	✓	✓				✓	✓
Alarm (buzzer)			✓										✓					
Data logger			✓										✓					
Interface		✓	✓								✓	✓	✓					
Analog output		✓	✓								✓							
Catalog page		p. 7	p. 7	p. 8	p. 8	p. 9	p. 9	p. 9	p. 9	p. 10	p. 11	p. 11	p. 11	p. 12	p. 12	p. 12	p. 12	

## Pt100 - High-Precision Thermometer

### Reference meter for any calibration requirement



- Suitable for all Pt100 4-wire probes with 4-pin miniature DIN-plug
- Highest accuracy and resolution (0,01°C)
- Freely adjustable analog output 0-1V or serial interface
- Offset and slope input
- Min-/max- value memory, hold function
- incl. calibration protocol

#### Additional functions of the GMH3750:

- 2 integrated logger functions
- Optical and acoustic min-/max- alarm
- Userdefined sensor curve (50 interpolation points)
- Real-time clock with day, month and year

**GMH 3710** access. not incl.

**GMH 3750** access. not incl.

**Microprocessor precision thermometer for Pt100 4-wire**

**Application:** reference measurings in liquids, soft media, air/gases.

### Specifications

#### Measuring range:

-199,99 ... +199,99°C resp. -200,0 ... + 850,0°C

-199,99 ... +199,99°F resp. -328,0 ... +1562,0 °F

**Resolution:** 0,01°C resp. 0,1°C

0,01°F resp. 0,1 °F

**Linearisation:** digital stored characteristic curve GMH3750 add. supports an userdefined curve.

**Auto-range:** automatically or manually choose of the measuring range.

**Accuracy:** (±1 digit) (at nominal temperature = 25°C)

≤ 0,03 °C / 0,06 °F at resolution 0,01 °

≤ 0,1 °C / 0,2 °F at resolution 0,1 °

**Temperature drift:** ≤ 0,002 °C / K

**Probe:** Pt100, 4-wire, in acc. to DIN EN 60751 probe connection via 4-pin miniature DIN-plug

**Nominal temperature:** 25°C

**Working temperature:** -25 to +50°C

**Relative humidity:** 0 to +95%RH (non-condensing)

**Storage temperature:** -25 to +70°C

**Display:** two 4½ digit LCDs (12.4mm or 7mm high), as well as additional arrows.

**Pushbuttons:** 6 membrane keys

**Output:** 3-pin jack connector Ø3.5 mm, choice between seriell interface or analog output

- **serial interface:** direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

- **analog output:** 0...1V, freely adjustable (resolution 13bit, accuracy 0.05% at nom. temp.)

**Power supply:** 9V-battery, type IEC 6F22 (included) as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)

**Low battery warning:** ' bAt '

**Power consumption:** approx. 1 mA

**Dimensions:** 142 x 71 x 26 mm (H x W x D) Impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip.

**Weight:** approx. 155 g

#### Functional range:

**Min./Max. value memory:** Memorizing of max. and min. values.

**Hold function:** By pressing a button the current values will be "frozen".

**Auto-Off-Function:** 1...120 min (can also be deactivated).

**Offset and slope input:** offset- and scale correction can be entered digitally.

#### Additional functions of the GMH3750:

**Min-/Max-alarm:** the measuring value is constantly monitored if they remain within the min./max. limits set.

- **Alarm:** 3 different alarm settings

off: alarm function not activated

on: visual alarm via display, integrated buzzer and interface

no Sound: alarm via display and interface

- **Regulating function:** with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm memorised (p.r.t. page 41)

#### Logger functions:

- **manually:** 99 data sets (data recall via keyboard or interface)

- **cycle:** 16.384 data sets (data recall via interface)

- **adjustable cycle time:** 1 sec. ... 1 h

Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT3050) available as additional equipment.

**Real-time clock:** clock with day, month and year

### Accessories

**plug-in probes Pt100** p.r.t. page 123

**GLF 401 Mini Air probe** (p.r.t. p. 123)

for fast and accurate measurements in ambient air

**GKK 1100 case** (340 x 275 x 83 mm) with foam lining for universal use

**USB 3100 N interface converter**

**GSOFT 3050 software** (p.r.t. p. 62)

**ST-R1 device protection bag**

**GNG 10 / 3000 power supply** miscellaneous accessories p.r.t. pages 60 - 62

## Calibrated Systems

### General

The overall error of a measuring consists of the sum of the instrument error and the probe error. To minimise the overall error, we offer calibrated and optimized systems below.

Due to their excellent system accuracy they are especially suitable for quality assurance according to ISO9000ff, as reference instruments in manufacturing processes, laboratory, service and maintenance, etc.

The system optimization is done via a special characteristic curve which is determined for each temperature probe separately and stored in the instrument (GMH3750) or. with probe adjusting via offset and slope input (GMH3710).



#### Scope of supply:

Measuring device GMH 3750 or GMH 3710, temperature probe GTF 401 1/3 DIN, plastic case GKK 3500 and certificate of calibration with 3 calibration points.

### GMH 3750 / SET1

incl. certificate of calibration

optimized measuring range: -20 .. +70°C

**Temperature probe:** GTF 401 1/3 DIN, Pt100, 4-wire (for tech. data please refer to p. 123)

**System accuracy:** better than 0,07°C (at opt. range)

**Calibration points:** -20°C / 0°C / 70°C

### GMH 3750 / SET2

incl. certificate of calibration

optimized measuring range: 0 .. +250°C

**Temperature probe:** GTF 401 1/3 DIN, Pt100, 4-wire (for tech. data please refer to p. 123)

**System accuracy:** better than 0,3°C (at opt. range)

**Calibration points:** 0°C / 100°C / 250°C

### GMH 3710 / SET1

incl. certificate of calibration

optimized measuring range: -20 .. +70°C

**Temperature probe:** GTF 401 1/3 DIN, Pt100, 4-wire (for tech. data please refer to p. 123)

**System accuracy:** better than 0,1°C (at opt. range)

**Calibration points:** -20°C / 0°C / 70°C

### GMH 3710 / DKD1

incl. DKD calibration certificate DIN 17025

optimized measuring range: -20 .. +70°C

**Temperature probe:** GTF 401 1/3 DIN, Pt100, 4-wire (for tech. data please refer to p. 123)

**System accuracy:** better than 0,1°C (at opt. range)

**Calibration points:** -20°C / 0°C / 70°C

### Calibration accessories

**GMHKonfig** free

(visit out homepage: Download --> Software)

#### Software description:

Comfortable software to edit the user defined sensor curve of the GMH3750. (e.g. for calibration laboratories etc.)

*Note: please note that for the interface communication with the device a interface converter (GRS 3100, GRS 3105 or USB 3100 N) is necessary (p.r.t. page 61)*



# Waterproof HACCP-Thermometer with Pt1000-probe



## Features

- Waterproof (device and probe)
- Easy handling
- Min-/Max. value memory
- High accuracy ( $\pm 0.1\text{ }^{\circ}\text{C}$   $\pm 1$  digit)
- Automatic freezing of constant measuring value (Auto-Hold)
- Battery life time > 6000 hours
- incl. calibration protocol

**GMH 2710** Temperature measuring device incl. universal probe

**GMH 2710-K** Temperature measuring device incl. teflon probe

### Field of application

#### High-precision measurements:

- Laboratory
- Quality management
- Production process control

#### Areas:

- Foods (HACCP)
- Medicine / pharmaceuticals
- Chemistry
- Fishkeeping, aquafarming, aquaculture
- Etc.

### General functions

- Auto-Power-Off
- Min-/Max. value memory
- Can be calibrated (zero point & slope)
- Automatic freezing of constant measuring value (Auto-Hold)
- Low battery display "BAT"

### Accessories

- K 50 BL**  
silicone protection cover (blue)
- K 50 RE**  
silicone protection cover (red)
- GKK 1105**



### Specification

#### Measuring ranges:

**GMH 2710** -200.0 ... +200.0  $^{\circ}\text{C}$

**GMH 2710-K** -200.0 ... +250.0  $^{\circ}\text{C}$

**Resolution:** 0.1  $^{\circ}\text{C}$

#### Accuracy:

at -20.0 ... 100.0  $^{\circ}\text{C}$   $\pm 0.1\text{ }^{\circ}\text{C} \pm 1$  digit

at -70.0 ... 200.0  $^{\circ}\text{C}$   $\pm 0.1\%$  of meas. value  $\pm 2$  digit

Probe is calibrated to the device

#### Probe:

Pt1000, 2-wire, potential-free, waterproof and steam-tight, permanently connected to device

$\varnothing$  3 mm / length: 100 mm,

**GMH 2710**

Plastic handle, 135 mm long, max. 70  $^{\circ}\text{C}$   
1 m PVC-cable, max. 100  $^{\circ}\text{C}$

**GMH 2710-K**

Teflon handle and 1m Teflon cable, both handle and cable are resistant to permanent high temperatures up to 250  $^{\circ}\text{C}$ , stainless steel bend protection

**Reaction time  $T_{90}$ :**

approx. 10 s

**Display:**

two 4-digit LCD (12.4 mm and 7 mm)

**Nominal temperature:** +25  $^{\circ}\text{C}$

**Working temperature:** -25 to +50  $^{\circ}\text{C}$

**Storage temperature:** -30 to +70  $^{\circ}\text{C}$

**Power supply:** 2 x AAA-batteries

**Battery life time:** > 6000 hours

**Protection class:** IP65 / IP67

**Dimensions:**

154 x 81 x 31 mm (H x W x D)

215 g (incl. battery and probe)

Impact resistant ABS housing

High accuracy and precision for a minimum of price!



### PRECISION POCKET THERMOMETER

#### GTH 175/Pt

Battery operation, complete with probe

**Application:** high-precision measurements in liquids, core measurements (using insertion probe), for air/gases or as reference device for calibrating other, more expensive systems!

#### Specification

**Measuring range:** -199,9 ... +199,9 °C  
**Resolution:** 0,1 °C  
**Accuracy:** 0,1 % of m.v. ±2 digit (within range of: -70.0 ... +199.9 °C), probe is calibrated to the device, i.e. the error in the range of 0 to 100 °C will be approx. 0,1 °C ± 1 digit.  
**Probe:** Pt1000, 2-wire, electrically isolated and mounted in st. steel tube (1.4571) 3 mm Ø and approx. 100 mm long, plastic handle approx. 135 mm long, anti-buckling glanding and 1 m of highly flexible silicone cable - permanently connected to the device.  
**Display:** 3½ digit, approx. 13 mm high  
**Nominal temperature:** +25 °C  
**Working temperature:** -30 to +45 °C  
**Storage temperature:** -30 to +70 °C  
**Power supply:** 9V battery type IEC 6F22 (included)  
**Battery service life:** approx. 200 operating hours  
**Low battery warning:** „BAT“  
**Dimensions:** device: approx. 106 x 67 x 30 mm (H x W x D). impact resistant ABS plastic housing  
**Weight:** approx. 190 g (incl. battery and probe)

#### GTH 175/Pt-E instrument with insertion probe

**Specification:** refer to GTH 175/Pt probe (st. steel tube, Ø 3mm x 100mm) like above, however with insertion probe for all soft media

#### GTH 175/Pt-K core temperature meas. instrument

**Specification:** refer to GTH 175/Pt probe (st. steel tube, Ø 3mm x 100mm) like above, however with teflon handle and 1m teflon cable. Both handle and cable are resistant to **air temperature of up to 250 °C** and can remain in the oven.

#### Option (upcharges)

**- Probe water-proof**  
 Probe like GTH 175/Pt but with PVC-cable (max. 100 °C) and sealed handle (max. 70 °C)

**Special design types: (on request)**  
 e.g. probe cable in another length, sensor tube in another length.

#### Accessories

**GB 9 V** spare battery  
**GKK 1100** case (340 x 275 x 83 mm) with foam lining  
**Komplett-offering** device incl. certificate of calibration and case  
 for additional accessories p.r.t. page 60 - 62

p.r.t. page 5

High accuracy and precision, plug-in probe, battery and permanent mains operation possible



### PRECISION THERMOMETER

#### GMH 175

Battery/mains operation, for plug-in probes, Pt1000 2-wire

**Application:** high-precision measurements in liquids, soft media, air/gases

#### Specification

**Measuring range:** -199,9 ... +199,9 °C  
**Resolution:** 0,1 °C  
**Accuracy:** (at nominal temperature = 25°C) device: 0,1 °C ± 1 digit (within range of: -70.0 ... +199.9 °C)  
**Probe:** Pt1000 probe, 2-wire, probe connection via 3.5 mm Ø jack connector.  
 Probes not included - please order separately!  
*For suitable, volt-free sensors see below or refer to page 124.*  
**Display:** 3½ digit, approx. 13 mm high  
**Working temperature:** -30 to +45 °C (**low temperature** - for use in cold storage rooms!)  
**Storage temperature:** -30 to +70 °C  
**Power supply:** 9V-Battery type IEC 6F22 (included) as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)  
**Battery service life:** approx. 200 operating hours  
**Low battery warning:** „BAT“  
**Dimensions:** approx. 142 x 71 x 26 mm (H x W x D). impact resistant ABS plastic case, front side IP65, integrated pop-up clip for table top or suspended use.  
**Weight:** approx. 160 g (incl. battery)

#### Accessories

Suitable plug-in temperature probes:  
 (Probes interchangeable without recalibration.)  
**GTF 175** immersion probe for liquids and aggressive gases  
**GES 175** insertion probe for soft media  
**GOF 175** surface probe for any solid surface  
**GLF 175** air/gas probe for clean media  
*Detailed description and more probes please refer to page 124*  
**ST-R1** device protection bag with cut-out for probe connection, suitable for GMH175, ...  
**GB 9 V** spare battery  
 for additional accessories p.r.t. page 60 - 62

## Precision room thermometer



NEW

### GTH 200 air

The room thermometer GTH 200 air is an essential tool for fast and precise temperature measurements in

- calibration rooms
- production / computer rooms
- living space
- laboratories
- etc.

The exposed but yet protected temperature sensor provides fast and precise measurements of  $\pm 0.2$  °C (at 20 °C). The device has undergone a streamlining process and is optimized to its key features, ensuring a comfortable and efficient handling with only one hand.

#### Specifications

<b>Measuring range:</b>	-20.0 ... 70.0 °C
<b>Resolution:</b>	0.1 °C
<b>Accuracy:</b>	( $\pm 1$ digit) (at nominal temperature) $\pm 0.5\%$ of meas. value $\pm 0.1$ °C
<b>Sensor:</b>	Pt 1000, 1/3 DIN class B
<b>Response time:</b>	T90 = approx. 5 s
<b>Display:</b>	31/2 -digit, 13 mm high LCD-display
<b>Nominal temperature:</b>	25 °C
<b>Working temperature:</b>	-20 ... 70 °C
<b>Working humidity:</b>	0 ... 95% RH (non condensing)
<b>Storage temperature:</b>	-25 ... 70 °C
<b>Power supply:</b>	9V battery, type IEC 6F22 (included)
<b>Current consumption:</b>	max. 0.1 mA
<b>Used battery indicator</b>	automatically if battery used: "BAT"
<b>Battery service time:</b>	approx. 6000 operating hours with alkaline battery
<b>Auto-off-function:</b>	selectable, 1 ... 120 min or continuous operation
<b>Min / max value memory:</b>	Lowest and highest values are saved.
<b>Housing:</b>	impact-resistant ABS housing, approx. 106 x 67 x 30 mm (H x W x T); additionally the sensor head at the "length" side, 35 mm long, $\varnothing$ 14 mm; resulting total length 141 mm
<b>Weight:</b>	approx. 135 g incl. battery
<b>Scope of supply:</b>	device, operation manual, battery

## Low cost hay temperature measuring probe



### Typ electronic 0120

We offer a economic measure to avoid damage caused by the self-heating due biological processes in stored hay, straw, etc, which may heat up the stored goods up to self ignition.

- fibre glass measuring rod
- one measuring point at the tip
- economical

#### Specification

<b>Measuring range:</b>	-20.0 ... +120.0 °C
<b>Resolution:</b>	0.1 °C
<b>Accuracy:</b>	$\pm 2$ °C (at nominal temperature)
<b>Probe connection:</b>	approx. 3m long connection cable with cinch plug ans connection adaptor GAD-1 Cinch
<b>Measuring rod:</b>	fibre glass probe, approx. 4 m long, approx. 10 mm $\varnothing$ , 1 measuring point in the probe tip
<b>Cutter tip:</b>	double-edged screw-type tip with integrated temperature sensor
<b>Display:</b>	3 1/2-digit, 13mm high LCD-display, display illumination by keypress
<b>Nominal temperature:</b>	25 °C
<b>Working temperature:</b>	0 to 50 °C
<b>Relative humidity:</b>	0 ... 95 %RH (non condensing)
<b>Storage temperature:</b>	-10 to 60 °C
<b>Power supply:</b>	separate supply for measuring electronics and illumination measuring electronics: 9 V battery, type IEC 6F22 (1 pcs.) illumination: mignon / LR 06 / AA 1,5V (2 pcs.)
<b>Battery life:</b>	meas. electronics approx. 200 hours of operation illumination: approx. 50 - 100 hours of operation (depending on battery type)
<b>Dimensions, weight (device):</b>	approx. 160 x 90 x 45 mm, approx. 480g
<b>Scope of supply:</b>	device, hay temperature probe 4m, measuring spike, plastic case, batteries, manual

#### Spare elements:

- Fibre glass probe, 4m**
- Cutter tip** with integrated temperature sensor
- Measuring device** incl. connection cable
- GKK 3600** case with foam lining
- GAD 1 CINCH**  
connection adaptor for cable to measuring rod

# Digital precision quick-response thermometer for thermocouples



## General functions:

- 5 different thermocouples can be used! (types J, K, N, S, T)
- Correction of meas. values for surface meas. can be switched on / off
- Serial interface, device can be connected to bus system

## Additional functions of GMH 3230 and GMH 3250:

- 2 plug-in probes can be connected and read simultaneously
- Temperature differences

## Additional functions of the GMH 3250:

- 2 integrated logger functions
- Optical and acoustic min-/max- alarm
- Real-time clock with day, month and year

## Additional functions of the GMH 3210:

- Analog output 0 - 1 V

**GMH 3210** accessories not incl. for connection of 1 plug-in probes

**GMH 3230** accessories not incl. for simultaneous connection of 2 plug-in probes

**GMH 3250** accessories not incl. for simultaneous connection of 2 plug-in probes

suitable probes  
p.r.t. p. 125-127!

Specification:	GMH 3210	GMH 3230	GMH 3250
<b>Thermocouples:</b>	J, K, N, S, T	J, K, N, S, T	J, K, N, S, T
<b>Resolution:</b>	0,1°C or. 1°C	0,1°C or. 1°C	0,1°C or. 1°C
<b>Measuring range:</b>	-220°C ... +1750°C (depending on thermocouples)		
<b>Measuring ranges: (extract)</b>			
<b>Type K: (MR1)</b>	-65,0 ... +300,0°C	-199,9 ... +999,9°C	
<b>(MR2)</b>	-220 ... +1372°C	-220 ... +1372°C	
	<i>further measuring ranges online at <a href="http://www.greisinger.de">www.greisinger.de</a></i>		
<b>Accuracy: (extract)</b>			
<b>Type K: (for MR1)</b>	±0,03% of m.v. ±0,05%f.s.	±0,03% of m.v. ±0,05%f.s. (≥-60°C)	±0,2% of m.v. ±0,05%f.s. (<-60°C)
<b>(for MR2)</b>	±0,08% of m.v. ±0,1%f.s.	±0,08% of m.v. ±0,1%f.s. (≥-100°C)	±1°C ±0,1%f.s. (<-100°C)
<b>Working temperature:</b>	-25 to +50°C		
<b>Probe connections:</b>	1	2	2
<b>Display:</b>	2 four digit LCDs (12.4mm and 7mm high)		
<b>Output:</b>	3-pin jack connector Ø3.5mm		
<b>serial interface:</b>	direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).		
<b>analog output:</b>	x	-	-
<b>Power supply:</b>	9V-battery, type IEC 6F22 (included) as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)		
<b>Power consumption:</b>	approx. 0.3 mA	approx. 1,6 mA	approx. 1,6 mA
<b>Housing dimensions:</b>	142 x 71 x 26 mm (L x W x D), Impact-resistant ABS plastic housing. Front side IP65, integrated pop-up clip for table top or suspended use. <b>Weight:</b> approx. 155 g		
<b>Functions:</b>			
<b>Min./Max. value memory</b>	x	x	x
<b>Hold function</b>	x	x	x
<b>Auto-Off-function</b>	x	x	x
<b>Low battery warning</b>	x	x	x
<b>Special applications:</b>			
<b>Compensation value for surface measurements</b>	x	x	x
<b>Zero-point offset entry</b>	x	x	x
<b>Difference measurements</b>	-	x	x
<b>Tare/diff-function</b>	-	x	x
<b>Min-/Max-alarm</b>	-	-	x
<b>Logger functions</b>	-	-	x
<b>Real-time clock</b>	-	-	x

## Functional Description

**Compensation value for surface measurements:** A compensation value (to compensate for the loss when transferring heat from the meas. object to the probe) can be set and switched on/off for surface measurements if required.

### Zero-point offset entry:

By entering the offset temperature the parameter can be moved parallel to the calibration graph.

### Difference measurements:

with a resolution of 0,1° or 1°. Temperature difference probe 1 - probe 2 can be displayed if 2 probes are connected.

### Tare/diff-function:

Press button to set the difference display 'probe 1 - probe 2' to zero.

### Analog output:

0 ... 1V, freely adjustable (resolution 13bit, accuracy 0.05% at nom. temp.)

### Min-/Max-alarm:

The meas. values of probe 1 or 2, probes 1 and 2 or the temp. difference are constantly monitored reg. the min. and max. values set.

### - Alarm: 3 different alarm settings

off: alarm function not activated  
on: visual alarm via display, integrated buzzer and interface

no Sound: alarm via display and interface

**- Controlling function:** with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm memorised (see accessories).

### Logger functions:

**- manually:** 99 data sets (data recall via keyboard or interface)

**- cycle:** 9.999 data sets (data recall via interface)

**- adjustable cycle time:** 1sec. ... 1h

Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT 3050) available as additional equipment.

**Real-time clock:** clock with day, month and year.

Maximum speed, universal application, low price



### QUICK RESPONSE THERMOMETER

#### GTH 1150

Battery operation, for plug-in probes

#### GMH 1150

Battery/mains operation, for plug-in probes

**Application:** quick response measurements on surfaces, in liquids, soft media, air/gases, at the smallest objects etc. For all applications where a resolution of 1 °C is sufficient.

#### Specification

- Measuring range:** -50 ... +1150 °C
- Resolution:** 1 °C
- Accuracy:** ≤ 1 % ± 1 Digit (from -20 to +550 and 920 to 1150 °C)  
≤ 1.5 % ± 1 Digit (from 550 to 920 °C)  
from -20 to -50 °C according to attached correction table
- Probe connection:** standard flat-pin plug (free of thermo-voltage) suitable for all NiCr-Ni (type K) - probes.  
*Probe is not included in scope of supply - optimum probe to be ordered separately depending on desired application! Refer to pages 125 - 129.*
- Display:** 3½ digit, approx. 13 mm high
- Nominal temperature:** 25 °C
- Working temperature:** 0 to 45 °C
- Storage temperature:** -20 to +70 °C
- Power supply:** 9V battery type IEC 6F22 (included).  
Additional at GMH 1150: d.c. connector for external 10.5-12V direct voltage supply.  
(suitable power supply: GNG10/3000)
- Power consumption:** approx. 0.4 mA
- Battery service life:** approx. 700 operating hours
- Low battery warning:** „BAT“
- Dimensions:** GTH ... approx. 106 x 67 x 30 mm (H x W x D).  
impact resistant ABS plastic housing.  
GMH ... approx. 142 x 71 x 26 mm (H x W x D).  
impact resistant ABS plastic housing, front side IP65, integrated pop-up clip for table top or suspended use.
- Weight:** approx. 150 g (GTH 1150), approx. 160 g (GMH 1150)

#### Accessories

- GTF 300** wire probe (for measuring ranges -65 ... 300 °C)
- additional NiCr-Ni probes** *p.r.t. page 125 - 129*
- GB 9 V** spare battery
- GKK 252** case (235 x 185 x 48 mm) with foam lining
- GKK 3000** case (275 x 229 x 83 mm) with punched lining suitable for all devices of the GMH3xxx-series, GMH 1150
- ST-KN** device protection bag, suitable for GTH 1150
- ST-N1** device protection bag, suitable for GMH 1150
- GNG 10/3000** power supply

for additional accessories p.r.t. page 60 - 62

High precision, low power consumption, min-/max-value memory, hold function, auto-off function, down to -25°C ambient temperature, °C and °F, offset/scale



### PRECISION QUICK RESPONSE THERMOMETER

#### GTH 1170

Battery operation, for plug-in probes, °C / °F (0,1° or 1°), min./max. value memory, hold, automatic-off, offset/scale

#### GMH 1170

Battery operation, for plug-in probes, °C / °F (0,1° or 1°), min./max. value memory, hold, automatic-off, offset/scale

**Application:** quick response measurements on surfaces, in liquids, air/gases etc.

#### Specification

- Measuring ranges:** -65,0 ... +199,9 °C or -65 ... +1150 °C  
(-85,0 ... +199,9 °F or -85 ... +1999 °F)
- Resolution:** 0,1 °C or 1 °C (0,1 °F or 1 °F)
- Accuracy:** -65,0...199,9 °C: ±0.05 % of m.v. ±0.2 % FS  
± 1 digit (at nom. temperature) -65 ... 1150 °C: ±0.1 % of m.v. ±0.2 % FS
- Temperature drift:** 0,01 %/K
- Point of comparison:** ±0,3 °C
- Probe connection:** standard flat-pin plug (free of thermo-voltage) suitable for all NiCr-Ni (type K) - probes.  
*(for suitable probes please refer to pages 125 - 129)*
- Offset and Scale:** digital offset and scale adjustment for optimum precision.
- Display:** 3½ digit, approx. 13 mm high
- Working temperature:** -25 to +50 °C
- Storage temperature:** -25 to +70 °C
- Power supply:** 9V battery type IEC 6F22 (included)
- Measuring interval:** approx. 3 meas. / sec.
- Power consumption:** approx. 0.15 mA
- Battery service life:** approx. 2000 operating hours
- Low battery warning:** „BAT“
- Auto-off-function:** selectable from 1 to 120 min. or deactivated.
- Min./Max. value memory:** memorizing of max. and min. values.
- Hold function:** By pressing a button the current values will be memorized.
- Dimensions:** GTH ... approx. 106 x 67 x 30 mm (H x W x D).  
impact resistant ABS plastic housing.  
GMH ... approx. 142 x 71 x 26 mm (H x W x D).  
impact resistant ABS plastic housing, front side IP65, integrated pop-up clip for table top or suspended use.
- Weight:** approx. 135 g (GTH 1170), approx. 150 g (GMH 1170)

#### Accessories

- NiCr-Ni probes** *p.r.t. page 125 - 129*
- GB 9 V** spare battery
- GKK 252** case (235 x 185 x 48 mm) with foam lining
- GKK 3000** case (275 x 229 x 83 mm) with punched lining suitable for all devices of the GMH3xxx-series, GMH 1170
- ST-KN** device protection bag, suitable for GTH 1170
- ST-N1** device protection bag, suitable for GMH 1170
- Komplett-offering** *p.r.t. page 5*  
device incl. certificate of calibration and case

for additional accessories p.r.t. page 60 - 62

# Temperature infrared handheld instruments



Application:	Device	MT 400	GIM 530 MS	ST 512	GIM 3590
Precision measurement			✓		✓
Fast scanning of surfaces		✓	✓	✓	✓
Food		✓	✓	✓	✓
Data storage					✓
Quality management		✓	✓	✓	✓
Universal use (due to adjustable emission rate)			✓	✓	✓

Function / Equipment:	Device	MT 400	GIM 530 MS	ST 512	GIM 3590
<b>Specification</b>					
Meas. range [°C]		-20..+330	-32..+530	-35..+1000	-35..+900
Resolution [°C]		0,1	0,1	0,1	0,1
Response time T <sub>95</sub>		< 1 sec.	300 ms	150 ms	150 ms
Laser		single	single	dual	cross
additional probe connection					type K
Optical resolution (Distance / Spot size)		8:1	20:1	30:1	75:1
emissivity		0,95 fix	0,100 .. 1,000	0,10 .. 1,00	0,100 .. 1,100
<b>Functions</b>					
General functions		Min/Max, Hold	Min/Max, Hold, Offset	Min/Max, Hold	Min/Max, DIF, Hold, AVG
Alarm			optical, acoustical		optical, acoustical
Data storage and visualisation					100 meas. protocols, software for visualisation
Interface					✓
<b>Catalog page</b>		<b>p. 14</b>	<b>p. 14</b>	<b>p. 15</b>	<b>p. 15</b>

Handheld instrument

Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

## The low-cost IR-thermometer



### MT 400

(with laser pointer)

The MT 400 is small, lightweight and easy-to-use. Just aim, trigger and read the temperature from the display... and that's it.

Anyone, who searches for fast and reliable temperature measurement, should take a closer look on the MT 400 infrared thermometer.

#### Example applications:

- **Electrics** – locating overheated cables
- **Heating / ventilation / air-conditioning** – monitoring of heat exchanger
- **Food** – Checking the temperature of stored food

#### Specification:

**Measuring range:** -20 ... 343 °C

**Resolution:** 0.1 °C or 0,1 °F

**Accuracy:** (at 18 °C ... 28 °C and < 80% RH)  
 < -7 °C: ±4 °C  
 ≥ 7 °C: ±2 % of meas. value +2 °C

**Optical resolution (D/S):** approx. 8:1

**Response time (t95):** < 1 s

**Spectral range:** 8-14 μm

**Emission rate:** permanently set to 0.95

**Sight:** single laser

**Working temperature:** 0 ... 50 °C

**Storage temperature:** -20 ... 60 °C

**Power supply:** 9V battery

**Features:** BAT, min/max, hold, °F, background illumination

**Dimensions:** 82 x 41.5 x 160 mm

**Weight:** approx. 180 g


**Scope of supply:** 1 device, 1 operation manual, 1 battery

#### Accessories

**GKK 252** small case (235 x 185 x 48 mm) with foam lining

**GKK 3100** case (275 x 229 x 83 mm) with foam lining

**GB 9 V** spare battery

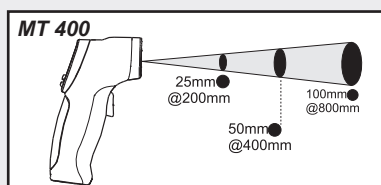

## Intelligent multi purpose infrared thermometer with precision glass optic, setting a standards



- adjustable emission rate from 0.100 to 1.000 (for numerous materials important)
- Adjustable visible and audible alarm
- Optical resolution 20:1
- Constant measuring area in between the distance of 13 to 140 mm
- Targeting laser for exact aiming of the object to be measured
- Fast scanning of hot and cold spots within 0.3 seconds

### GIM 530 MS

**Calibration certificate** (testpoints at 23°C, 110°C a. 510°C)

User-friendly industrial design combined to state of the art technology are setting a new standard in professional and all day non-contact temperature measuring.

The large temperature range of -32 to 530°C, the targeting laser and the optical resolution of 20:1 allow very precise measuring of surfaces in a variety of applications. Simply aim at the target with the laser, push the trigger and the value is displayed within 0.3 seconds plus several other informations.

#### Examples for application:

- **Electrical and mechanical service and maintenance**
- **Heating, ventilation, air-conditioning - finding thermal bridges etc.**
- **Motor vehicle diagnosis, electricity, home improvement**
- **Checking food temperature during keeping warm or storing**

#### Specification:

**Measuring range:** -32 ... + 530°C (-20 ... +980°F)

**Resolution:** 0.1°C (0.1°F)

**Temperature display:** °C or °F selectable

**System accuracy:** (at ambient temperature = 23°C ±5°C)  
 ±1% or ±1°C from 0°C to 530°C (highest value shall be valid)  
 ±1°C ± 0.07°C/°C from 0°C to -32°C

**Repeat accuracy:** ±0.5% or ±0.7°C from 0°C to 530°C (highest value shall be valid)  
 ±0.7°C ±0.05°C/°C from 0°C to -32°C

**Optical Resolution (D/S):** 20 : 1

**Response time (t95):** 0.3 seconds

**Spectral range:** 8 - 14 μm

**Emission rate:** 0.100 to 1.000, free selectable

**Laser:** < 1mW laser class IIa

**Configuration:** min/max/scan/hold/offset/°C/°F

**Display illumination:** yes

**Alarm function:** optical and acoustic HIGH-/LOW- alarm

**Working temperature:** 0 ... 50 °C

**Storage temperature:** -20 ... 60 °C (without battery)

**Power supply:** 9V alkaline battery


**Battery service life:** approx. 20 hours for use with laser and illumination

**Weight / Dimensions:** approx. 150 g; 190 x 38 x 45 mm (H x W x D)

**Scope of supply:** Device with battery, operating manual, device bag made of nylon

#### Accessories:

**GKK 252** small case (235 x 185 x 48 mm) with foam lining

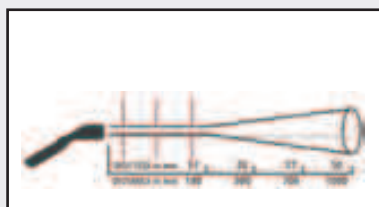

#### Display

- current temperature value
- MIN-MAX-value: current and last
- HIGH-/LOW-alarm
- HOLD-function
- emission rate
- symbol for display illumination and laser



**Cost-efficient infrared measuring technology for contact-free surface temperature measurements within seconds.**



- Dual-laser
- Alarm function

## ST 512

Contact-free infrared digital thermometer

### General example applications for infrared digital thermometer:


- **Monitoring of circuit boards:** overheated parts
- **Heating / ventilation / air-conditioning:** detecting bad isolation, untight pipes, energy consumption, general service measurements, etc.
- **Electrical systems, machines, power engines:** detecting hot spots at electric connections, temperature rises at motors, bearings, pumps, compressors, etc.
- **Food processing and monitoring:** food temperature, process temperature, etc.
- **Medical technology, biological and chemical analysis:** contact-free temperature measurements within seconds, no longer problems with dangerous, aggressive or similar media
- **Industry, engineering, craft:** Surface temperature measurements of rotating parts (barrels, drums, shafts, printing machines, plastic welding, bitumen, concrete, etc.)

## Specification

<b>Measuring range:</b>	-50 bis 1000 °C
<b>Resolution:</b>	0,1 °C
<b>Accuracy:</b>	-50 °C ... -23 °C ±7°C (typical)
	(at ambient temperature = 23°C till 25°C) -23 °C ... -2 °C ±4°C
	-2 °C ... 94 °C ±2,5°C
	94 °C ... 204 °C
	±(1.0% of meas. value + 1°C)
	204 °C ... 426 °C
	±(1.5% of meas. value + 1°C)
	426 °C ... 1000 °C
	±(3% of meas. value + 1°C)
<b>Reproducibility:</b>	±0.5% of meas. value or ±1°C
<b>Response time (t<sub>90</sub>):</b>	150 ms
<b>Emission rate:</b>	0.10 ... 1.00, selectable
<b>Spectral range:</b>	8-14 µm
<b>Optical resolution (D/S):</b>	approx. 30:1
<b>Sight:</b>	dual laser
<b>Power supply:</b>	9V battery
<b>Display:</b>	LCD-display with function indicator symbols and background illumination
<b>Working conditions:</b>	0 ... 50 °C, 10 ... 90% RH
<b>Storage temperature:</b>	-10 ... 60 °C
<b>Features:</b>	HOLD, min/max, °F, LOCK, alarm
<b>Alarm function:</b>	selectable min / max alarm, with integrated buzzer
<b>Dimensions:</b>	146 x 104 x 43 mm
<b>Weight:</b>	approx. 163 g
<b>Scope of supply:</b>	1 device, 1 operation manual, 1 battery

### Option:

- Calibration certificate (25 / 100 / 200 °C)
- Initial calibration at first delivery

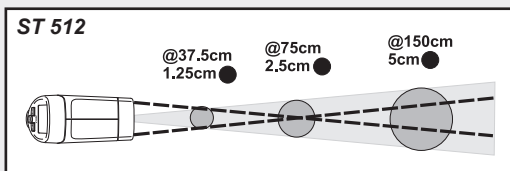

**The new LaserSight - series**  
Temperatures in the cross-hair



## GIM 3590

Non-contact infrared digital thermometer incl. software

The measured point will be marked exactly with the precision of a laser cross-hair. The integrated sharp point optics allows measurements of even smallest measuring objects down to 1mm. Its position sensor turns the display always to the most comfortable orientation.

- **Measuring range -35 to 900°C**
- **switchable focus point optics**
- **laser cross-hair shows real measuring point size**
- **Optical resolution 75:1**
- **Flip-display**
- **additional thermocouple input**
- **USB interface and graphical software**

## Specification

<b>Measuring range:</b>	-35.0 ... +900.0°C (IR and thermocouple type K)
<b>TC input:</b>	thermocouple type K
<b>Resolution:</b>	0.1°C
<b>Accuracy IR:</b>	±0.75°C or ± 0.75% of m.v.*)
<b>Accuracy type K:</b>	±0.75K or ± 1% of m.v. (at 23°C ± 5°C)
<b>Response time (t 95):</b>	150ms
<b>Optical resolution:</b>	75:1                      16mm @ 1200mm
<b>at focus point optic:</b>	1mm @ 62mm
<b>Rate of emission:</b>	0.100 to 1.100, selectable
<b>Meas. functions:</b>	MAX / MIN / HOLD / DIF / AVG / °C / °F
<b>Alarm functions:</b>	acoustic / visual high-low-alarm
<b>Display:</b>	LC Flipwith position sensor / bar graph
<b>Backlight:</b>	green or alarm colours (red / blue)
<b>Spectral range:</b>	8 - 14 µm
<b>Working temperature:</b>	0 ... 50°C
<b>Relative humidity:</b>	10 ... 95%, non condensing
<b>Data logger:</b>	100 measurements protocols
<b>Interface:</b>	USB
<b>Software:</b>	oscilloscope software, 20 readings/ s
<b>Voltage supply:</b>	2 x AA alkaline battery o. USB
<b>Weight:</b>	420 g
<b>Scope of supply:</b>	Device incl. USB cable & software, bag, insertion probe type K, batteries, carrying loop, calibration protocol, transport case

### Options:

- Certificate of calibration
- Tripod

GIM3590		Standard	
S	20	16	40
D	0	1200	2000
S	17	1	123
D	0	62	500
S	130	100	262
D	5000	4000	1000



# Humidity / flow rate handheld instrument



Application:	Device	GMH 3330	GMH 3350	GFTH 95	GFTH 200	GFTB 200
Air conditioning		✓	✓	✓	✓	✓
Ambient air monitoring		✓	✓	✓	✓	✓
Meteorology						✓
Living climate						✓
Flow measurement		✓	✓			
Air pressure meas.						✓
<b>Calculation of</b>						
Dew point Td		✓	✓		✓	✓
Wet bulb temperatur Twb					✓	✓
Moisture content x						✓
Absolute humidity d						✓
Dew point distance		✓	✓			
Enthalpy		✓	✓			

Function / Equipment:	Device	GMH 3330	GMH 3350	GFTH 95	GFTH 200	GFTB 100
<b>Specification</b>						
<b>Meas. range</b>						
Humidity		0,0..100,0 % r.F.		10,0..95,0 % r.F.	0,0..100,0 % r.F.	0,0..100,0 % r.F.
Humidity (rec. range)		11..90 % r.F.		30..80 % r.F.	11..90 % r.F.	11..90 % r.F.
Temperature		-40..+120 °C / add. external probe		-20..70 °C	-25..+70 °C	-25..+70 °C
Flow		0,05..5,00 bzw. 0,55..20,00 m/s		-	-	-
Pressure		-		-	-	10..1100 mbar
<b>Accuracy</b>						
Humidity (rec. range)		± 0,1 %		± 3 %	± 2,5 %	± 2,5 %
Temperaturr		± 0,2 % (Pt1000) / ± 0,5 % of m.v. ± 0,5 °C (NiCr-Ni)		± 0,5 % of m.v. ± 0,1 °C	± 0,5 % of m.v. ± 0,1 °C	± 0,5 % of m.v. ± 0,1 °C
Flow		± 0,1 %		-	-	-
Pressure		-		-	-	± 1,5 mbar
<b>Resolution</b>		0,1 % r.F. / 0,1 °C / 0,01 m/s		0,1 % r.F. / 0,1 °C	0,1 % r.F. / 0,1 °C	0,1 % r.F. / 0,1 °C / 0,1 mbar
<b>Plug-in probe</b>		✓	✓		✓	
<b>Functions</b>						
General functions		Min/Max, Hold, Auto-Off	Min/Max, Hold, Auto-Off		Min/Max, Hold	Min/Max, Hold, Auto-Off
Interface		✓	✓			✓
Alarm			✓			✓
Data logger			✓			
<b>Catalog page</b>		p. 17	p. 17	p. 19	p. 19	p. 20

# humidity, temperature and flow rate measuring device



Komplett

WK

- Double display of humidity and temperature
- Compact probe for humidity and temperature measuring resp. flow rate measuring (probe exchange without re-calibration)
- Calculation of dew point temperature, dew point distance and enthalpy
- Additional NiCr-Ni-socket for surface measurement
- Min-/Max value memory, Hold function
- Serial interface, device can be connected to bus system (up to 5 devices can be connected to one PC interface)
- Battery/d.c. operation

## Additional functions of the GMH3350:

- 2 integrated logger functions
- Optical and acoustic min-/max- alarm
- Real-time clock with day, month and year

**GMH 3330** probe not included

**GMH 3350** probe not included

Please order probes separately! (p.r.t. page 18)  
(No re-calibration required for probe exchange!)

## Specification:

### Measuring ranges:

- Rel. humidity:** 0,0 ... 100,0 %RH  
**Ambient temperature:** -40,0 ... +120,0°C (depending on TFS-probe)  
**Surface temperature:** -80,0 ... +250,0°C  
**Flow rate:** depending on STS probe (p.r.t. page 18)  
**Resolution:** 0,1 %RH., 0,1 °C / 0,1 °F, 0,01 m/sec.  
**Accuracy (device):** (±1 digit, at nominal temperature = 25°C)  
**Rel. humidity:** ±0.1%  
**Ambient temperature** (Pt1000): ±0,2%  
**Surface temperature** (NiCr-Ni): ±0,5% of m.v. ±0,5°C  
**Flow rate:** ±0,1%

**Probes:** (p.r.t. page 18) No calibration required for exchange of humidity/temperature or flow rate probe.

**Probe connection:** 6-pin screened Mini-DIN-socket

**NiCr-Ni-connection:** for miniature flat-pin plug

**Display:** two 4½ digit LCDs (12.4mm or 7mm high), as well as additional functional arrows.

**Working temperature:** -25 to +50°C

**Relative humidity:** 0 to +95%RH (non-condensing)

**Storage temperature:** -25 to +70°C

**Pushbuttons:** 6 membrane keys

**Interface:** serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

**Power supply:** 9V-battery, type IEC 6F22 (included) as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)

**Auto-Off-Function:** 1...120 min (can also be deactivated).

**Power consumption:** approx. 2,5 mA (incl. TFS0100)

**Low battery warning:**  $\Delta$  and 'bAt'

**Housing dimensions (device):** 142 x 71 x 26 mm (H x W x D)  
Impact-resistant ABS plastic housing, membrane keyboard.  
Front side IP65, integrated pop-up clip for table top or suspended use.

**Weight:** approx. 160 g (incl. battery)

### Functional range:

**Min-/Max-value memory:** memorizing of max. and min. values for humidity, temperature, dew point etc.

**Hold function:** By pressing a button the current values will be "frozen".

**Calculation of dew point:** based upon humidity and temperature.

**Calculation of dew point distance:** by means of a surface meas.

**Calculation of enthalpy** (thermal content h of the air)

## Adjustment-function for atmospheric humidity measurements

**NiCr-Ni-temperature measuring:** any standard NiCr-Ni-probe (type K) can be plugged in. Recommendation: GOF400VE (p.r.t. p. 125). A compensation value can be set for surface meas. if necessary.

### Flow measurements:

Two different systems for averaging are integrated:

- **continuous averaging:** the average value displayed is calculated using the last measurements during the averaging time set.

- **averaging upon request:** by starting the current measuring value will be displayed for the averaging time. As soon as the time has expired the average value will be displayed, the device is in HOLD mode.

- **selectable averaging time:** 1 ... 30 seconds

### Additional functions of the GMH3350:

**Min-/Max-alarm:** the measuring value is constantly monitored if they remain within the min./max. limits set.

- **Alarm:** 3 different alarm settings

off: alarm function not activated

on: visual alarm via display, integrated buzzer and interface

no Sound: alarm via display and interface

- **Controlling function:** with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm memoried (p.r.t. accessories)

### Logger functions:

- **manually:** 99 data sets (data recall via keyboard or interface)

- **cycle:** 5.400 data sets (data recall via interface)

- **adjustable cycle time:** 1sec. ... 1h

Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT3050) available as additional equipment.

**Real-time clock:** clock with day, month and year

### Accessories:

**GNG 10/3000** plug-in power supply

**GKK 3500** case with cut-outs for GMH3xxx

**GKK 3600** case with foam lining for universal use

**USB 3100 N** interface converter, electrically isolated

**ST-RN** device protection bag with cut out for sensor connection, suitable for: GMH3330, GMH3350

**GSOFT 3050**

software for the setting, data read-out and printing of all logger data stored for devices of the GMH3xxx-series with logger function

**GAM 3000**

Switching module for devices of the GMH3xxx-series incl. alarm output

**GMH3330 incl. TFS0100E and WPF4**

device incl. measuring probe, certificate of calibration and case (p.r.t. page 5)

**miscellaneous accessories (case, mains adaptors, etc.)**  
suitable for all GMH3xxx devices p.r.t. p. 60 - 62

# Meas. probes for GMH 3330 and GMH 3350

## humidity / temperature



### Humidity/temperature:

**TFS 0100 E** (0,0 ... 100,0 %RH)  
Humidity/temperature probe, exchangeable

### Specification :

#### Meas. ranges:

**Humidity:** 0,0 ... 100,0 %RH (rec. range of application: 11...90%RH)  
**Temperature:** -40,0 ... +120,0 °C (attention: working temperature of electronics!)

**Accuracy:** (at nominal temperature = 25°C)

**Humidity:** ±2,5 %RH  
**Temperature:** ±0,5 °C

#### Sensors:

**Humidity:** capacitive polymer humidity sensor  
**Temperature:** Pt1000, 1/3 DIN

**Electronics:** PC board with amplifier and data memory for sensor data (calibration, etc.) integrated in probe handle.

**Working temperature:** -25 to +60°C (handle and electronics)  
-40 to +120°C (for short time up to +120°C) (sensor head and tube)

**Relative humidity:** 0 to +100 %RH

**Dimensions:** Probe tube: Ø14 x 119 mm, plastic handle: Ø19 x 135 mm, approx. 1m PVC conn. cable with 6-pin Mini-DIN-plug

**Weight:** approx.. 90 g

### Accessories: calibration device

Humidity reference cells works on the basis of physiochemical processes. A specific value of relative humidity adjusts itself over a saturated salt solution.

The test chamber is separated from the solution by a diaphragm so that the sensor under test is protected against contamination by the solution. The test container can be used in all mounted positions.



### **GFN-SET1**

Humidity reference cells for ~33 and ~76 %RH, probe adapter and robust carry case

### **GFN 33**

humidity reference cell for ~33 %RH, incl. adapter

### **GFN 76**

humidity reference cell for ~76 %RH, incl. adapter

### Surface temperature:

**GOF 400VE** (p.r.t. page 123)

Quick-response surface probes for walls, floors etc.

**GTF 300** (p.r.t. page 125)

Quick-response basic thermocouple probe for universal applications (surface measurement)

## flow speed



### Water:

**STS 005** (0,05 ... 5,00 m/sec.)  
Flow measuring probe with snap-on head, exchangeable

### Specification:

**Sensor type:** windmill-type anemometer

**Meas. range:** 0,05 ... 5,0 m/sec.

**Accuracy:** ±1 % of range ±3% of meas. value (at nominal temperature)

**Permiss. angle flow:** ±20°, without additional meas. faults

**Working temperature:** 0 to +70 °C

**Relative humidity:** 0 to +100 %RH (non-condensing)

**Dimensions:** Probe head: Ø 11 x 15mm, tube: Ø 15 mm overall length 165 mm, required insertion opening: Ø 16 mm, approx. 5m PVC connection cable with 6-pin Mini-DIN-plug

**Weight:** approx. 75 g

### Air:

**STS 020** (0,55 ... 20,00 m/sec.)

Flow measuring probe with snap-on head, calibrated and exchangeable.

### Specification:

**Sensor type:** windmill-type anemometer

**Meas. range:** 0,55 ... 20,00 m/sec.

**Accuracy:** ±1 % of range ±3% of meas. value (at nominal temperature)

**Permiss. angle flow:** ±20°, without additional meas. faults

**Working temperature:** 0 to +70 °C

**Relative humidity:** 0 to +100 %RH (non-condensing)

**Dimensions:** Probe head: Ø 11 x 15mm, tube: Ø 15 mm overall length 165 mm, required insertion opening: Ø 16 mm, approx. 5m PVC connection cable with 6-pin Mini-DIN-plug

**Weight:** approx. 75 g

### Spare parts and accessories:

**STE 005**

Spare snap-on head for STS 005

**STE 020**

Spare snap-on head STS 020

**GTS** Telescopic rod (overall length 1 m)

Please specify when ordering - no retrofit assemblage possible!



picture shows GTS with assembled STS020

## Humidity/Temperature Meas. Device



### Digital-Hygro-/Thermometer

#### GFTH 95

**Application:** quick-response humidity and temperature measurements in EDP rooms, museums, galleries, churches, office complexes, workshops, storage rooms, swimming-baths, private buildings, greenhouses, for refrigeration engineering, air conditioning, for building sites/technology, for inspectors or rendering of expert opinions etc.

#### Specification:

##### Measuring range:

°C: -20.0 ... 70.0 °C

%RH: 10 ... 95 %RH (recom. range: 30 ... 80%)

Resolution: 0.1°C or 0.1 %RH.

**Accuracy:** (±1 digit) (at nominal temperature = 25°C)

temperature: ±0.5% of. m.v. ±0.1°C

humidity: ±3%RH (for range 30 to 80%)

##### Measuring probe:

temperature: Pt 1000

humidity: capacitive polymer humidity sensor

**Response time:** T<sub>90</sub> = 15 sec.

**Display:** 3½-digit, 13mm high LCD-display

**Operation elements:** slide switch for selection of measuring range

**Nominal temperature:** 25°C

##### Operating conditions:

Electronic: -20...70°C; 0...80 %RH (non-condensing)

Sensors: -20...70°C; 0...100 %RH

**Power supply:** 9V-battery type IEC 6F22 (in scope of supply)

**Power consumption:** max. 0.1 mA

**Low battery warning:** „BAT“ displayed automatically in display of low battery condition.

**Housing:** impact resistant ABS-housing 106 x 67 x 30 mm, plus sensor head protruding at the longer side 35 mm long and 14 mm Ø, ie. overall length 141 mm.

**Weight:** approx. 135 g incl. battery

#### Accessories:

**GKK 252 case**  
(235 x 185 x 48 mm) with foam lining

**GKK 1100 case**  
(340 x 275 x 83 mm) with foam lining

**GB 9 V** spare battery

**Certificate of calibration WPF4**  
for ISO9000ff (p.r.t. page 4)

## Humidity / Temperature / Dew Point Measuring Device



### Digital-Hygro-/Thermometer

#### GFTH 200

#### GFTH 200 SET

(incl. infra-red thermometer GIM 530 MS and case)

Because of the low power consumption and the integrated min-/max-value memory the **GFTH200** is perfectly suitable for long term climate surveillances.

The additional infrared thermometer contained in the GFTH 200 SET makes it easy to check mould-problem areas on walls etc. The wall can easily scanned by means of the laser beam within very short time. When wall temperature falls below the critical dewpoint (this is, when the wall gets wet), the device alerts with an audible signal.

#### Advantages GFTH 200:

- relative humidity, temperature and dew point in just one instrument
- high accuracy by means of digital works calibration
- min-/max-value memory for all measurements
- external Pt1000 temperature probe connectable
- offset and slope correction for easy adjustment
- extrem low power consumption

#### Additional advantages GFTH 200 SET:

- blindingly easy search for thermal bridges
- targeting laser for precise location even of inaccessible areas
- audible alarm below dewpoint
- fast evaluation of mould-problem areas

#### Specification:

##### Measuring range:

Temp: -25.0 ... +70.0 °C; -13.0 ... +158.0 °F

%RH: 0.0 ... 100.0 %RH

(recommended range: 11 - 90 %RH)

Td: (Dewpoint) -40.0...+70.0 °C or -40.0...+158.0 °F

Resolution: 0.1 %RH., 0.1°C or 0.1°F

**Accuracy:** (±1 digit) (at nominal temperature = 25°C)

temperature (internal): ±0.5% of m.v. ±0.1°C

temperature (external): 0.1°C (device) + probe accuracy

humidity: ±2.5 %RH (for range 11 to 90%)

##### Measuring probe:

temperature: Pt 1000

humidity: capacitive polymer humidity sensor

**Response time:** T<sub>90</sub> = 10 sec.

**terminal for external probe:** for connection of any Pt1000-probes with 3.5mm mono plug (for suitable probes p.r.t. page 124)


**Display:** 3½-digit, 13mm high LCD-display  
**operation elements:** 3 keys for On/Off, min-/max-value display and hold. Slide switch for selection of measuring range.

**Nominal temperature:** 25°C

##### Operating conditions:

Electronic: -25...70°C; 0...80 %RH (non-condensing)

Sensors: -25...70°C; 0...100 %RH

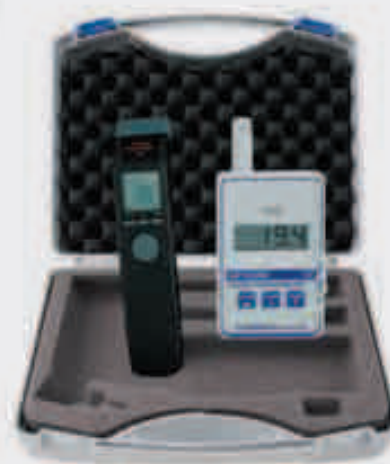

### Measuring set

**Power supply:** 9V-battery type IEC 6F22

##### Power consumption:

approx. 9µA at 1 measurings / 60s

approx. 100µA at 1 meas. / sec. (mode FAST)

**Low battery warning:** „BAT“

**Min./max. value memory:** Min and Max measuring values are stored for all 3 ranges.

**Hold key:** The current measuring will be "frozen" (for all three ranges).

**Housing:** impact resistant ABS-housing 106 x 67 x 30 mm, plus sensor head protruding at the longer side 35 mm long and 14 mm Ø, ie. overall length 141 mm.

**Weight:** approx. 135 g incl. battery

**GIM 530 MS:** for technical data for this instrument please refer to page 14.

#### Accessories:

**GKK 252 case**  
(235 x 185 x 48 mm) with foam lining

**GOF 175 Mini** temperature probe  
for surface temperature measuring (p.r.t. page 124)

**further temperature probe refer to page 124**

**Certificate of calibration WPF4**  
for ISO9000ff (p.r.t. page 4)

**GFTH200 - WPF4** complete-offering  
device incl. certificate of calibration and case (p.r.t. p. 5)

# Climate measuring device

## Precision Hygro- / Thermo- / Barometer



### Feature:

- air humidity, temperature and air pressure measurement
- additional display for further parameters, e.g. dew point temperature and absolute humidity
- alarm function with integrated buzzer
- min / max value memory
- very low power consumption (> 6500 operating hours)
- PC interface

### Applications:

- mobile weather station
- housing space, indoor swimming pools
- offices and production rooms, laboratories, storage rooms
- museums, gallery, churches
- Cooling and climate technology
- construction, building physics, loss assessment

## Digital-Hygro-/Thermo-/Barometer

### GFTB 200

The GFTB 200 is designed for measuring air pressure, air humidity and temperature within seconds. It reaches remarkable accuracy because of its high precision sensors. The dew point temperature display of the GFTB 200 provides efficient protection from moisture damage potentially caused by condensation water and therefore helps preventing mold infestation. The integrated alarm function can be used to acoustically remind the user to ventilate in order to optimally and efficiently use heating energy. The integrated interface together with the software EBS 20M (optional) allow the use as mobile weather station with additional long-term recording. The GFTB 200 can precisely and clearly display the air condition with parameters like wet bulb temperature, absolute humidity and moisture content of the air.

### Specifications:

#### Measuring ranges:

**Temperature:** -25.0°C ... +70.0 °C

**Air humidity:** 0.0 ... 100.0 % r.F. (recommended range: 11 ... 90 % RH)

**Air pressure:** 10.0 ... 1100.0 mbar

#### Calculated parameters:

**Dew point temperature Td:** -40.0 ... 70.0 °C

**Wet bulb temperature Twb:** -27.0 ... 70.0 °C

**Moisture content x:** 0.0 ... 280.0 g/kg

**Absolute humidity d:** 0.0 ... 200.0 g/m<sup>3</sup>

**Resolution:** 0.1%r.F.; 0,1°C bzw. 0.1°F, 0.1mbar

**Accuracy:** (±1 Digit) (at nominal temperature = 25 °C)

Temperature: ±0,5 % v.MW. ±0,1°C (Pt1000 1/3 DIN B)

Air humidity: ±2,5 % r.F. (at range 11 bis 90%)

Air pressure: ±1,5 mbar (750...1100 mbar)

#### Sensors:

Temperature: Pt1000

Air humidity: capacitive polymer humidity sensor

Air pressure: piezo-resistive sensor hybrid

**Response time:** T<sub>90</sub> = 10 sec.

**Display:** 4½ -digit, approx. 11 mm high LCD-display with additional displays

**Operation elements:** 3 keys for ON/OFF, min/max value display, hold

**Nominal temperature:** 25°C

#### Working conditions:

Electronics: -25...70 °C; 0...80 % r.F. (non condensing)

Sensors: -25...70 °C; 0...100 % r.F.

**Power supply:** 9V-Batterie Typ IEC 6F22

**Current consumption:** max. 20 µA at 1 meas. / 60 s (mode SLOW)  
approx. 70 µA at 1 meas. / 1 s (mode FAST)

**Used battery indicator:** automatically if battery used: "BAT"

**Auto-off-function:** When Auto-off is activated, the device switches automatically off, if keypad is not attended for a longer time (selectable 1..120min).

**Interface:** Serial interface, via electrical isolated interface converter USB 3100 of USB 3100 N (accessories) directly connectable to PC

**Min / max value memory:** Lowest and highest values are saved for all units.

**Hold function:** The current displayed value is 'frozen' (all units are affected)

**Configurable display:** choice between automatically displaying all values rotationally or manual selection, units not needed can be excluded

**Sea level correction:** The displayed value of the barometer can be converted to air pressure at sea level (therefore the altitude above sea level has to be entered)

**Tendency indicator (for barometer):** air pressure falling/increasing

**Offset- and scale:** digital offset- and scale adjustment of measurements

**Housing:** impact-resistant ABS housing, approx. 106 x 67 x 30 mm (H x W x T); additionally the sensor head at the "length" side, 35 mm long, Ø 14 mm; resulting total length 141 mm

**Weight:** approx. 130 g incl. battery

### Options: (upon upcharge)

- KIT USB-interface kit, consisting of:
  - USB interface converter **USB 3100 N**
  - multi channel software **EBS20M** (to record all device units) (ordering description: GFTB 200 / KIT)

### Complete-offering:

## GFTB 200 SET

(GFTB200 incl. infra-red thermometer GIM 530 MS and case GKK 3000)



The additional infrared thermometer contained in the **GFTB 200 SET** makes it easy to check mould-problem areas on walls etc.

The wall can easily scanned by means of the laser beam within very short time. When wall temperature falls below the critical dewpoint (this is, when the wall gets wet), the device alerts with an audible signal.

### Additional advantages GFTB 200 SET:

- blindingly easy search for thermal bridges
- targeting laser for precise location even of inaccessible areas
- audible alarm below dewpoint
- fast evaluation of mould-problem areas

**Note:** for technical data for the infra-red thermometer GIM530MS please refer to catalog page 14.

### Accessories:

**GKK 252** case (235 x 185 x 48mm) with foam lining

**WPF4** Certificate of calibration, humidity, for ISO9000ff (p.r.t. p. 4)

**WPD5** Certificate of calibration, pressure, for ISO9000ff (p.r.t. p. 4)

miscellaneous accessories p.r.t. page 60 - 62

# Material moisture handheld instruments



Application:	Device	GMK 210	GMK 100	GMI 15	GMR 110	GMH 3810	GMH 3830 + appropriate electrode	GMH 3850 + appropriate electrode	BaleCheck 100	BaleCheck 200
Carpenter, joiners			✓	✓	✓	✓	✓	✓		
DIY / Hobby			✓	✓	✓	✓	✓	✓		
Boat & Caravan (wood & GFK)		✓								
Certified glue lam							✓	✓		
Foelwood, wooden log					✓	✓	✓	✓		
Wood chips							✓	✓		
Plaster, screed			✓	✓	✓	✓	✓	✓		
Concrete, bricks, lime mortars			✓	✓	✓	✓	✓	✓		
Construction-damage assessment			✓	✓	✓	✓	✓	✓		
Water damage restoration			✓	✓	✓	✓	✓	✓		
Hay bale / bale of straw							✓	✓	✓	✓
Corn (barley, wheat)							✓	✓	✓	✓

Function / Equipment:	Device	GMK 210	GMK 100	GMI 15	GMR 110	GMH 3810	GMH 3830	GMH 3850	BaleCheck 100	BaleCheck 200
<b>Specification</b>										
Method		capacitive (non-destructive)			resistive (Resistance)					
Sensor / Probe		integrated			integrated		external		external GSF40	external GSF40TK
Meas. range		material moisture: 0 ... 100%			material moisture: 0 ... 100%					
Characteristics		14	18		4	494			4	494
Programmabel user curves								4		
<b>Functions</b>										
General functions		Hold, Auto- Off	Hold, Auto- Off		Hold, Auto- Off	Hold, Auto- Off, Sort	Hold, Auto- Off, Sort	Hold, Auto- Off, Sort	Hold, Auto- Off	Hold, Auto- Off, Sort
Interface							✓	✓		✓
Analog output							0 ... 1 V, freely adjustable	0 ... 1 V, freely adjustable		0 ... 1 V, freely adjustable
Data logger								✓		
Catalog page		p. 23	p. 23	p. 22	p. 26	p. 26	p. 24	p. 24	p. 27	p. 27

Handheld instrument

Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

## Material Moisture Measurement with GREISINGER handheld instruments

### • Resistive measuring method

(GMR 100, GMH 3810, GMH 3830, GMH 3850)

The electrical resistance often depends on the material moisture. Therefore the devices measure the (possibly extremely high) values of resistance and convert them to the displayed value by means of integrated characteristic curves. The temperature has to be compensated especially at the measurement of wood – all GREISINGER-instruments have an integrated temperature compensation. In most cases the contact is realised by nails that are driven into the material are used to contact.

### • Capacitive measuring method

(GMK 210, GMK 100, GMI 15)

The dielectric properties of an object are often a good indicator for its material moisture. The dielectric coefficient of water is considerably higher than that of dry lumbers or building materials. Therefore the total dielectric coefficient of the measuring object can be easily used to get its material moisture. For the measurement the device has to be applied on the material. Precondition therefore: planar surfaces, no metallic elements.

• Another method is to measure the material moisture indirectly by means of the **relative humidity** (i.e. with GMH 3330 + TFS 0100 E): The humidity in a sealed hole within a material depends on the material moisture. By means of a so-called sorption isotherm or a corresponding table the material moisture can be calculated from the humidity.

• The **oven dry method** can be used for reference point measurement with highest accuracy.

The moist material is weighed and afterwards dried at increased temperature until no weight loss is detectable anymore. The material moisture can be calculated from the moist and arid weight.

## Units

• Material moisture  $u$  (also „atro“): relating to dry mass

$$\text{material moisture } u [\%] = \frac{(\text{mass wet} - \text{mass dry})}{\text{mass dry}} * 100$$

Particularly important for carpenters, joiners, etc.

• Moisture content  $w$ : material moisture related to wet total mass

$$\text{moisture content } w [\%] = \frac{(\text{mass wet} - \text{mass dry})}{\text{mass wet}} * 100$$

Particularly important for the evaluation of combustibles.

• “Digit“ (GMI 15)

The displayed value is relative, that means without a physical unit. This can be used to get comparative moisture information of the same materials. Lower values indicate less moisture, higher values indicate therefore more moisture.

For further information on this topic please see the devices' manuals and our homepage [www.greisinger.de](http://www.greisinger.de) under Download -> Documents

## Capacitive moisture detection

without damaging of material up to 4 cm of depth



## Indicator for moisture in wood and buildings

### GMI 15

Device for high-speed determination of moisture in buildings, contracting work etc.

The GMI 15 allows detection of moisture in wood down to a depth of approx. 3 cm and in concrete or wash floor down to a depth of approx. 4 cm. Detection of moisture behind ceramic tiles and/or various wall or floor coverings. To check moisture simply place device on the surface to be measured - no injection into the measuring object required.

### Application:

Humidity indication for i.e. estate agents (for fast control state of buildings), property management, house owners, architects, building experts, building contractors, mobile homes (moist in insulations), polyester / GRP boats

**Note:** The GMI 15 is an indicator for the fast estimation - it does not replace precision instruments like the GMH 3810, GMH 3830 and GMH 3850

### Specification:

**Display:** 3½-digits, 13 mm high LCD  
**Power supply:** 9V-battery (type IEC 6F22)  
**Power consumption:** approx. 5 mA  
**Low battery warning:** „BAT“ displayed automatically in case of low battery.  
**Working temperature:** 0 to 50 °C  
**Storage temperature:** -20 to +70 °C  
**rel. humidity:** 0 to 80 %RH (non-condensing)  
**Housing:** Impact resistant ABS plastic housing, approx. 106 x 67 x 30 mm (H x W x D).  
 approx. 150 g (ready for use)

### Weight:

### Display range:

#### concrete / floor pavement

0 ... 5 = dry  
 6 ... 9 = humid, normal humidity level  
 10 ... = wet

#### wood / fibre glass reinforced polyester

0 ... 3 ~ 0...12% : dry  
 3 ... 6 ~ 12...20% : air-dry  
 6 ... 11 ~ 20...30% : wind-dry  
 11 ... ~ 30% ... : wet

## Capacitive moisture measurement and moisture rating

without damaging of material, 2 measurement depth



### Measuring device moisture in wood and buildings

## GMK 100

The GMK 100 is a capacitive material moisture measuring device with direct moisture display in percent. It is optimally suited for home and handcraft. Depending on the application, it is possible to display the material moisture "u" or the water content "w".

The humidity is measured by a measuring plate on the back of the device. With a side-mounted switch the measuring depth can be changed. With the help of measurements in different depth a statement could be made if for example the material dries already or if the moisture is just on the surface of the material.

### Application:

Humidity measurement and indication of Wood, Concrete, Screed, Plaster, etc.

### Features:

- Non-destructive measurement
- Moisture display in percent
- Acoustical and visual moisture rating
- 18 material characteristics for wood and building materials
- 2 different measurement depth
- Backlight

### Specification:

<b>Display:</b>	2 displays for material and measured value, backlight
<b>Moisture rating:</b>	
Visuel:	Rating of the moisture in 6 levels from WET to DRY
Akustisch:	Signal tone
<b>Measurement depths:</b>	10 mm and 25 mm
<b>Materials:</b>	18 characteristic curves for wood and popular materials, additionally reference curve for high-resolution relative measurements
<b>Working temperature:</b>	-25 to 50 °C
<b>Storage temperature:</b>	-25 to 70 °C
<b>Power supply:</b>	9V-battery (Type IEC6F22)
<b>Power consumption:</b>	approx. 0,12 mA
<b>Power backlight:</b>	approx. 2,5 mA
<b>Functions:</b>	Used-battery-display, Auto-Off-Function, Hold
<b>Housing:</b>	Impact-resistant ABS plastic housing, front: IP65, approx. 106 x 67 x 30 mm (H x W x D).
<b>Weight:</b>	approx. 135 g (incl. battery)

### Accessories:

**PW 25** Testing probe to control the device

## Capacitive moisture measurement and moisture rating

without damaging of material, 2 measurement depth



### CARAVAN and BOAT

## GMK 210

The GMK 210 is a capacitive material moisture measuring device with direct moisture display in percent. It is optimally suited for home and handcraft. Depending on the application, it is possible to display the material moisture "u" or the water content "w".

The humidity is measured by a measuring plate on the back of the device. With a side-mounted switch the measuring depth can be changed. With the help of measurements in different depth a statement could be made if for example the material dries already or if the moisture is just on the surface of the material.

### Application:

Humidity measurement and indication of Wood, GFK (glass fiber reinforced plastic)

### Features:

- Non-destructive measurement
- Moisture display in percent
- Acoustical and visual moisture rating
- 14 material characteristics for wood and GFK
- 2 different measurement depth
- Backlight

### Specification:

<b>Display:</b>	2 displays for material and measured value, backlight
<b>Moisture rating:</b>	
Visuel:	Rating of the moisture in 6 levels from WET to DRY
Akustisch:	Signal tone
<b>Measurement depths:</b>	10 mm and 25 mm
<b>Materials:</b>	14 characteristic curves for wood (with assignment label for wood species) and GFK, insulating materials i.e. Styropor additionally reference curve for high-resolution relative measurements
<b>Working temperature:</b>	-25 to 50 °C
<b>Storage temperature:</b>	-25 to 70 °C
<b>Power supply:</b>	9V-battery (Type IEC6F22)
<b>Power consumption:</b>	approx. 0,2 mA
<b>Power backlight:</b>	approx. 2,5 mA
<b>Functions:</b>	Used-battery-display, Auto-Off-Function, Hold
<b>Housing:</b>	Impact-resistant ABS plastic housing, front: IP65, approx. 106 x 67 x 30 mm (H x W x D).
<b>Weight:</b>	approx. 145 g (incl. battery)

### Accessories:

**PW 25** Testing probe to control the device.



# Precision Material Moisture Meas. Device

for wood, building material, straw, hay, paper, textiles etc.



- 466 wood characteristic curves
- 28 building material characteristic curves
- moisture estimation
- display of moisture content  $u$  or wet-basis moisture content  $w$
- external temperature probes connectable
- serial interface or analog output 0-1V, freely adjustable
- incl. calibration protocol

## Additional functions of the GMH 3850

- 2 integrated logger functions
- 4 programmable user curves
- Real-time clock

MPA certified  
appr. for glued timber construction  
acc. to DIN 1052-1

**GMH 3830** Resistive material-moisture and temperature measuring device, access. not included

**GMH 3850** Resistive material-moisture and temperature measuring device, access. not included with data logger and user programmable material curves

### Description:

the GMH3830 offers important advantages in handling, user-friendliness, functional range and accuracy for your metrological work.

The absolute moisture content of 494 materials is displayed directly. The cumbersome usage of calculation tables now is history. Additionally you get a evaluation of your material state (wet/dry) of nearly all materials instantly. Of course the formerly used wood groups A, B, C and D of the predecessor models are further more supported.

### General application:

precision measurements in cut wood, chip board, veneer, sawdust, wood chips, wood wool, flax, straw, hay, concrete, gas concrete, bricks, wash floor, cast, limestone mortar, cement mortar, paper, carton, textiles etc.

### User:

architect, expert, inspector, building contractor, painter, carpenter, parquet joiner, floor tiler, wood works, timber desiccation plant, building repair company, textile industry etc.

### Datalogger (only GMH 3850):

This instrument is indispensable for the documentation of material state by quality assurance systems.

By means of the integrated data logger there can be recorded up to 10000 measuring values and processed on demand. Additionally there can be 4 material curves individually programmed to acquire data by reference measurements with dry ovens or CM-method. This instruments finally makes paper correction tables useless.

### Specification:

#### Measuring principle:

moisture: resistive material-moisture-measuring matching DIN EN 13183-2:2002

temperature external: thermocouple, NiCr-Ni (type K)  
temperature internal: NTC

Characteristic curves: 494

#### Measuring range:

moisture: 0,0 to 100,0 % moisture content  
(depending on characteristic curve)

temperature: -40,0...+200,0°C (-40,0...+392,0°F)

Estimation: in 9 steps (dry ... wet)

Resolution: 0,1% resp. 0,1°C (0,1°F)

Accuracy device: (at nominal temperature)

wood:  $\pm 0,2$  % moisture content  
(deviation from characteristic curve at range 6...30%)

building mat.:  $\pm 0,2$  % moisture content  
(deviation from characteristic curve)

temperature (external):  $\pm 0,5$  v. MW  $\pm 0,3$  °C

Temperature compensation:

automatically or manual

Sensor connection:

moisture: BNC

temperature: flat pin plug (free of thermo-voltage)

Perm. working temperature: -25 to 50 °C

Display: two 4 digit LCDs (12.4mm or 7mm high), as well as additional arrows.

Pushbuttons: 6 membrane keys

Output: 3-pin jack connector  $\varnothing 3.5$ mm, choice between serial interface or analog output

- serial interface: direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

- analog output: 0...1V, freely adjustable

Power supply: 9V-battery, additional d.c. connector for external 10.5-12V direct voltage supply (suitable power supply: GNG10/3000).

Power consumption: approx. 2,5 mA

Dimensions / Weight: 142 x 71 x 26 mm, 155 g

Housing: Impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip

#### Functions:

Hold, Auto-Hold (automatic freezing of a constant value), Low battery warning ( $\Delta$  and ' bAt '), Sort (limitation of the choice of materials to up to 8 favourites), Auto Power Off

### Specification (only GMH 3850):

#### Logger functions:

-manually: 99 data sets (visualisation via keys/display or interface)

-cyclic: 10000 data sets (visualisation via interface)

-adjustable cycle time: 30sec ... 1h

Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT3050) available as additional equipment.

Real-time clock: clock with day, month and year

User curves: 4, programmable via interface

20 interpolation points per curve

By means of the gratis software GMHKonfig the interpolation points can be comfortably edited and stored to the instrument. To connect the instrument to a PC one of the interface converters mentioned below is needed.

#### Accessories:

GSOFT 3050 logger software

GRS 3100 RS232 interface converter

USB 3100 N interface converter

GKK 3500 case (394 x 294 x 106 mm)

for additional accessories p.r.t. page 25  
miscellaneous accessories p.r.t. pages 60 - 62

## Accessories

- 1** **GMK 38**  
measuring cable (BNC to 2x banana plug) approx. 90 cm long
- 2** **GHE 91**  
Reciprocating piston electrode, to drive measuring nails into material without auxiliary devices
- 3** **GSE 91**  
Impact electrode, to drive measuring nails into material
- 4** **GEG 91**  
Handle, suitable for GSE 91
- 5** **GSG 91**  
Penetration electrode, adequate for steel nails and measuring rods
- 6** **GST 91**  
9 steel nails (3 pieces each, 12, 16 and 23 mm long) in plastic case, Ø 2,5 mm  
**GST 91/40**  
10 steel nails, 40 mm long, Ø2.5 mm, in plastic case
- 7** **GST 45i**  
2 Teflon isolated steel nails, 45 mm long, Ø2.5 mm  
**GST 60i**  
2 Teflon isolated steel nails, 60 mm long, Ø2.5 mm
- 8** **GOK 91**  
Surface measuring caps (pair) (for use with GSG 91 or GSE 91)
- 9** **GMS 300/91**  
Measuring rods 300 mm long (pair), for wood chips, wood wool, paper, carton, etc. (for use with GSG 91 or GSE 91)
- 10** **GST 15B**  
2 steel nails with bore hole, 15 mm long, Ø3.8 mm (for direct connection of measuring cable GMK 38)  
**GST 25B**  
as above, Ø3.8 x 25 mm  
**GST 40B**  
as above, Ø3.8 x 40 mm
- 11** **GBSK 91**  
Wire brush (pair) short, for depths up to approx. 100 mm (for direct connection of measuring cable GMK 38)
- 12** **GBSL 91**  
Wire brush (pair) long, for depths up to approx. 300 mm (for direct connection of measuring cable GMK 38)
- 13** **GEF 38**  
Flat electrode (pair) for screed, paper, etc. (for direct connection of measuring cable GMK 38)

- 14** **GLP 91**  
conducting paste 100 ml, for surface measurements and depth indication in walls, wash floors etc. with brush probes
- 15** **GSP 91**  
sensor for surface measurements on paper, textiles etc.
- 16** **GSP 91 ES**  
spare sensor element for GSP 91
- 17** **GSF 50 (110 cm)**  
**GSF 50K (43 cm)**  
Injection probe (without temperature sensor) for measurement up to a depth of 40 cm or 107 cm, incl. 1 m connection cable  
Suitable for:  
• wood chips  
• wood wool  
• straw, hay, grain  
• saw dust, etc.
- 18** **GSF 50TF (110 cm)**  
**GSF 50TFK (43 cm)**  
Injection probe (with temperature sensor) for measurement up to a depth of 40 cm or 107 cm, incl. 1 m connection cable  
Suitable for:  
• wood chips  
• wood wool  
• straw, hay, grain  
• saw dust, etc.
- 19** **GSF 40 (67 cm)**  
Injection probe (without temperature sensor) for measurement of pressed bales up to a depth of 60 cm, incl. 1 m connection cable  
Suitable for:  
• pressed hay or straw bales  
• grain
- 20** **GSF 40TF (67 cm)**  
Injection probe (with temperature sensor) for measurement of pressed bales up to a depth of 60 cm, incl. 1 m connection cable  
Suitable for:  
• pressed hay or straw bales  
• grain
- 21** **GTF 38**  
NiCr-Ni temperature probe, volt-free, Ø2.2x25 mm, 1 m cable (recommended for wood moisture measurements)
- 22** **GES 38**  
NiCr-Ni injection probe, volt-free, Ø4x150mm, 1 m cable (recommended for wood moisture measurements)
- 23** **GPAD 38**  
Test adapter (with 2 reference values) for testing GMH 38xx and GMR 110
- 24** **GKK 3500**  
Plastic case (394 x 294 x 106 mm) with cut-outs for device and accessories
- 25** **ST-RN**  
Protection bag with blanked out sensor connections (suitable for GMH 3830, GMH 3850)  
pict.: GMH3830 in ST-RN

## Accessories, Sets



### SET 38 HF (Wood moisture set)

**Content:**  
GKK 3500 (case), GMK 38 (measuring cable), GSE 91 (impact electrode), GST 91 (measuring nails), GTF 38 (temperature probe)  
**Application:** wood



### SET 38 BF (Wood and building moisture set)

**Content:**  
GKK 3500 (case), GMK 38 (measuring cable), GSE 91 (impact electrode), GST 91 (measuring nails), GTF 38 (temperature probe), GMS 300/91 (measuring rods), GBSK 91 (wire brush), GLP 91 (conductive paste)  
**Application:** wood, concrete, screed, plaster



### SET 38 MPA (MPA wood moisture set)

**Content:**  
as SET 38 HF, but GHE 91 electrode instead of GSE 91  
**Application:** wood, gluelam

## Measuring material moisture for wood and building materials with extended functions



### Resistive material-moisture meas. device

## GMH 3810 with integrated measuring pins

The measuring pins integrated on the reinforced front numerous measurements can be done without additional accessories.

For measuring of very hard materials we suggest the components shown at the accessories section.

- 494 characteristic curves
- incl. calibration protocol

### Specification:

#### Measuring principle:

moisture: resistive material-moisture-measuring matching DIN EN 13183-2:2002  
temperature internal: NTC

**Characteristic curves:** 494

#### Measuring range:

moisture: 0,0 to 100,0 % moisture content (depending on characteristic curve)  
temperature: -40,0...+200,0°C (-40,0...+392,0°F)

**Estimation:** in 9 steps (dry ... wet)

**Resolution:** 0,1% resp. 0,1°C (0,1°F)

**Accuracy device:** (at nominal temperature = 25°C)

wood: ±0,2 % moisture content (deviation from characteristic curve at range 6...30%)  
building mat.: ±0,2 % moisture content (deviation from characteristic curve)

#### Temperature compensation:

automatically or manual

**Measuring probe:** 2 pin holders M6\*0.75 with 19mm pins (12mm utilisable)

**Perm. working temperature:** -25 to 50°C

**Storage temperature:** -25 to +70°C

**Relative humidity:** 0 to +95%RH (non-condensing)

**Display:** two 4-digit LCDs

**Power supply:** 9V-battery, type IEC 6F22

**Power consumption:** approx. 2.5 mA

**Dimensions / Weight:** 142 x 71 x 26 mm, 175 g

**Housing:** Impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip

**Functions:** Hold, Auto-Hold, Sort, Auto Power Off (description refer to GMH3830)

### Accessories:

**GST 3810** replacement pins (10 pcs.)

**GMK 3810** 1 m measuring cable, incl. adapter (2 x banana plug to 2 x banana plug) Allows connection of accessories



**GSE 91** impact electrode

miscellaneous accessories p.r.t. pages 60 - 62

## The compact solution for wood, plaster and building moisture measurements



PREIS-SENKUNG!



### Resistive material moisture measuring device

## GMR 110

### with integrated measuring needles

Compact and robust measuring device for fast evaluation of material moisture in firewood, timber, flake board, inlay, plaster, cement and lots more. A suitable characteristic is selected with help of material table on the rear side of the device before measuring. The material is contacted by pressing the measuring needles into it. The measured value is displayed only a short time afterwards. The device is especially designed for precise firewood and timber measurements, however, a lot of additional building materials can be rated.

- Material tables on rear side of device
- Integrated, exchangeable measuring needles
- Moisture rating (wet/dry) via bar graph
- Display of material moisture or water content
- Integrated temperature compensation
- Characteristic curve display

### 3 wood groups:

- h.01 spruce, pine
- h.02 maple, birch, beech, larch (EUR), ash (EUR), fir
- h.03 oak, ash (AM), poplar, douglas fir  
*a lot of additional wood types can be determined with the table of the instruction manual*

### 8 building material curves:

- c.01 cement screed, concrete
- c.02 anhydrite screed
- c.03 plaster, lime mortar
- c.04 cement mortar
- c.05 gas concrete
- c.06 lime sand brick
- c.07 clay brick
- c.08 gypsum plaster



- new characteristic curves
- automatic temperature compensation
- material tables on rear side of device
- comfortable characteristic and rating display

### Specifications:

**Measuring principle:** resistive material moisture measurement acc. to DIN EN 13183

**Characteristic curves:** 3 different wood groups (h.01, h.02, h.03) for a total of 130 wood types and 8 different building material curves (c.01, c.02, c.03, c.04, c.05, c.06, c.07, c.08)

**Measuring range:** 0,0 bis 100 % material moisture (depends on selected characteristics)

**Moisture rating:** in 6 steps (wet ... dry)

**Resolution:** 0,1% (<20%), 1% (>20%)

**Accuracy:** (at nominal temperature = 25 °C)

wood: ±0,2 % material moisture (Deviation to wood characteristic curve in range 6 ... 20%)

building materials: ±0,2 % material moisture (Deviation to corresponding characteristic curve)

### Temperature compensation:

automatically or manual

**Measuring probe:** 2 needle holder M6x0.75 with 19 mm measuring needles (12 mm usable length)

**Working temperature:** -5 ... 50 °C

(material not frozen)

**Working humidity:** 0 ... 95 % RH

(non condensing)

**Storage temperature:** -25 ... 70 °C

**Display:** 2 LCD displays for characteristic and measuring value

**Power supply:** 9V battery, type IEC 6F22

**Current consumption:** approx. 1.8 mA

**Housing:** made of impact-resistant ABS, plastic foil keyboard, clear screen. IP65 at front

**Dimensions:** 110 x 67 x 30 mm + needles 26 mm

**Weight:** approx. 155 g

**Features:** hold, auto-hold, auto-power-off

**Scope of supply:** device, 2 needle protection caps, battery, operation manual

### Accessories:

**GST 3810**

spare measuring needles (10 pieces)

**GMK 3810** measuring cable incl.

socket adaptor

*additional special accessories at page 25*

**GKK 252** small case (235 x 185 x 48 mm) with foam lining

**GB 9 V** spare battery

miscellaneous accessories p.r.t. pages 60 - 62

## Hay and straw humidity measuring device for measuring in bales pressed of hay, straw or grain



**NEW**



- easy and comfortable handling
- robust 60 cm V4A measuring rod
- characteristics for hay, straw and grain
- percent display
- moisture rating

### BaleCheck 100

(incl. measuring rod and protective bag)

The BaleCheck 100 is a professional measuring device for measuring the moisture in bales of pressed hay and straw. It allows to easily determine the suitability for storage and quality of hay and straw – important especially in agriculture, stock breeding and horse keeping. The slim but robust measuring rod should be used for measurements in different depths. If the maximal moisture is < 16.0 % u, the material can be stored or spent without hesitation.

#### Areas of application:

- agriculture
- processing or storing of hay or straw
- hay and straw trading
- stock breeding
- horse keeping

#### Specifications:

**Measuring range:** 0.0 ... 50 % u (material moisture)  
0.0 ... 100 % w (water content)

**Resolution:** 0.1% (till 19.9%) and 1% (from 20%)

**Characteristics:** hay, straw, grain, reference characteristics

**Moisture rating:** 6-step bar graph (wet ... dry)

**Temperature compensation:** manual

**Display:** 2 displays for characteristics and measuring value

**Housing/weight:** impact-resistant ABS, 110 x 67 x 30 mm (HxWxD), 155 g

**Working conditions:** -25 ... 50 °C (device), 0 ... 100 °C (rod),  
0 ... 95% RH (non condensing)

**Measuring rod:** V4A stainless steel, 600 mm x Ø 10mm,  
1 m connection cable with BNC-plug, 260 g, design of  
probe handle offers comfortable operation

**Features:** auto-power-off, HOLD, auto-HOLD

**Power supply:** 9V battery, type 6F22 (included)

**Current consumption:** approx. 1.8 mA

**Scope of supply:** device, measuring rod, protective bag,  
operation manual

## Hay and straw humidity measuring device incl. temperature measurement in bales of pressed hay, straw or grain



**NEW**



- fast temperature measurement integrated
- easy and comfortable handling
- robust 60 cm V4A measuring rod
- characteristics for hay, straw and grain
- percent display
- moisture rating

### BaleCheck 200

(incl. measuring rod and protective bag)

The BaleCheck 200 is a professional measuring device for measuring the moisture in bales of pressed hay and straw. It allows to very precisely determine the suitability for storage and quality of hay and straw as well as grain – important especially in agriculture, stock breeding and horse keeping. The slim but robust measuring rod should be used for measurements in different depths. If the maximal moisture is < 16.0 % u, the material can be stored or spent without hesitation. The additional temperature measurement makes an automatic temperature compensation possible and supports fire prevention (proof of due diligence).

#### Areas of application:

- fire prevention
- agriculture
- processing or storing of hay or straw
- hay and straw trading
- stock breeding
- horse keeping

#### Specifications:

**Measuring range:** 0.0 ... 50.0 % u (material moisture)  
0.0 ... 100.0 % w (water content)  
-40.0 ... 200.0 °C (device)

**Resolution:** 0.1%, 0.1 °C

**Characteristics:** hay, straw, grain, reference characteristics  
approx. 480 additional material moisture characteristics

**Moisture rating:** 9-step bar graph (wet ... dry)

**Temperature compensation:** automatic or manual

**Display:** 2 4-digit LCD displays (12.4 mm and 7 mm)

**Working conditions:** -25 ... 50 °C (device), 0 ... 100 °C (rod),  
0 ... 95% RH (non condensing)

**Housing/weight:** impact-resistant ABS, 142 x 71 x 26 mm (HxWxD), 155 g  
**Measuring rod:** V4A stainless steel, 600 mm x Ø 10mm, 1 m connection  
cable with BNC-/type K- plug, temperature 0 ... 100 °C,  
260 g,

**Power supply:** 9V battery, type 6F22 (included)

**Current consumption:** approx. 2.5 mA

**Features:** sort (limit material selection to up to 8 favorites), auto-power-off, HOLD, auto-HOLD, interface, analog output (0-1V), power supply terminal (10.5-12 VDC)

**Scope of supply:** device, measuring rod with temperature sensor,  
protective bag, operation manual

# Conductivity handheld instruments



Application:	Device	GMH 5430	GMH 5450	GMH 3430	GLF 100	GLF 100 RW
Waters measuring, fishkeeping, aquafarming (fresh- / marine waters)		✓	✓	✓	✓	
Drinking water-, process monitoring, ground measurements		✓	✓	✓	✓	
Cleaning processes		✓	✓	✓	✓	✓
Pure and ultrapure water		✓	✓			✓
Food production and -control		✓	✓	✓	✓	
Quality management		✓	✓	✓	✓	✓
Data storage			✓			
Water-proof		✓	✓			
electrodes for replacement		✓	✓			

Function / Equipment:	Device	GMH 5430	GMH 5450	GMH 3430	GLF 100	GLF 100 RW
<b>Specification</b>						
Meas. range Conductivity		0,0..4,000 $\mu\text{S/cm}$ bis 0..1000 $\text{mS/cm}$ (5 ranges available) depends on electrode	0,0..4,000 $\mu\text{S/cm}$ bis 0..1000 $\text{mS/cm}$ (5 ranges available) depends on electrode	0,0..200,0 $\mu\text{S/cm}$ bis 0,0..200,0 $\text{mS/cm}$ (4 ranges available)	0..2000 $\mu\text{S/cm}$ bis 0,0..100,0 $\text{mS/cm}$ (3 ranges available)	0,000..2,000 $\mu\text{S/cm}$ bis 0,0..100,0 $\mu\text{S/cm}$ (3 ranges available)
Resistance		0,005..100,0 $\text{K}\Omega\text{m/cm}$	0,005..100,0 $\text{K}\Omega\text{m/cm}$	0,005..100,0 $\text{K}\Omega\text{m/cm}$	--	0,01..20,00 $\text{M}\Omega\text{m/cm}$
TDS		0..1999 $\text{mg/l}$	0..1999 $\text{mg/l}$	0..1999 $\text{mg/l}$	0..2000 $\text{mg/l}$	--
Salinity		0,0..70,0	0,0..70,0	0,0..70,0	0,0..50,0	--
Temperature		-5,0..+150,0 $^{\circ}\text{C}$	-5,0..+150,0 $^{\circ}\text{C}$	-5,0..+100,0 $^{\circ}\text{C}$	-5,0..+100,0 $^{\circ}\text{C}$	-5,0..+100,0 $^{\circ}\text{C}$
Sensor connection		7-pole bayonet	7-pole bayonet	fixed connection	fixed connection	fixed connection
Electrode		2- or 4-pole	2- or 4-pole	2-pole graphite electrode	2-pole graphite electrode	2-pole stainless steel electrode
<b>Functions</b>						
General functions		Min/Max, Hold, Auto-Off	Min/Max, Auto-Off, Hold, Calibration memory	Min/Max, Hold, Auto-Off	Min/Max, Hold, Auto-Off	Min/Max, Hold, Auto-Off
Interface		✓	✓	✓		
Alarm			✓			
Data logger			✓			
Catalog page		p. 30-31	p. 30-31	p. 32	p. 29	p. 29

# Conductivity measuring devices



## Highlights:

- 3 conductivity measuring ranges
- Low power consumption
- Automatic measuring range change-over
- Min/max-value memory
- Automatic temperature compensation via integrated temperature sensor
- Hold function
- Adjustable



## Area of application:

- Fresh and sea water aquaristics
- Fish farming / water monitoring
- Drink water monitoring, etc.



## Area of application:

- Checking of pure and ultra-pure water
- Checking of boiler water
- Functional check of ion exchangers

## GLF 100

Universal conductivity measuring device (incl. calibration protocol)

## GLF 100 RW

Conductivity meter for ultra-pure water

Specification	GLF 100	GLF 100 RW
<b>Measuring ranges:</b>		
Conductivity:	0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 100.0 mS/cm	0.000 ... 2.000 µS/cm 0.00 ... 20.00 µS/cm 0.0 ... 100.0 µS/cm
Temperature:	-5.0 ... +100.0 °C	-5.0 ... +100.0 °C
TDS:	0 ... 2000 mg/l	--
Salinity:	0.0 ... 50.0	--
Resistivity:	--	0.0100 ... 0.2000 MΩ*cm 0.010 ... 2.000 MΩ*cm 0.01 ... 20.00 MΩ*cm
<b>Accuracy:</b> (±1 digit, at nominal temperature = 25 °C)		
Conductivity:	±0.5 % of m.v. ±0.5 % FS	typ. ±1% of m.v. ±0.5 % FS
Temperature:	±0.3 °C	±0.3 °C
<b>Temp.-compensation:</b>	off: deactivated nLF: non-linear, acc. to EN 27888 --	off: deactivated nLF: non-linear, acc. to EN 27888 LIN: linear, with adjustable coefficients NaCl: compensation for weak NaCl-solutions acc. to EN 60746-3
Reference temperatures:	20 and 25 °C	20 and 25 °C
<b>Measuring cell:</b>	2-pole measuring cell, Ø 12 mm (graphite) Cable length: 1,2 m with integrated temperature sensor	2-pole measuring cell, Ø 12 mm (stainless steel: 1.4404, 1.4435) Cable length: 1,2 m
warranty for sensor element:	12 months	
<b>Display:</b>	approx. 11 mm high, 4½-digit LCD-display	
<b>Working conditions</b>		
Device:	-25 ... +50 °C, 0 ... 95 % RH (non condensing)	
Measuring cell:	-5 ... +80 °C (for short-time: 100 °C)	
<b>Power supply:</b>	9V-battery, type 6F22 (in scope of supply)	
<b>Power consumption:</b>	< 1.5 mA	
<b>Housing:</b>	impact resistant ABS, membrane keyboard, transparent panel, front side IP65	
<b>Dimensions (device):</b>	110 x 67 x 30 mm (H x W x D)	
<b>Weight:</b>	approx. 155 g	
<b>Device functions:</b>		
<b>Hold function:</b>	by keypress the current measuring value will be "frozen"	
<b>Min/max-value memory:</b>	the min. and max. measured value is stored	
<b>Power-Off-function:</b>	device turns off after some time (adjustable: 1-120 min or deactivated), if no operating has taken	

## The measuring cell

The measuring head is designed without compromise. The holes ensure the well exchange of the measuring fluid, nonetheless the sensor is protected against mechanical loads. The integrated temperature sensor has very quick response time. Compared to simpler electrode designs the measurements are much more accurate and faster.

### GLF 100:

Graphite used as material for the electrodes makes the applicability up to 100 mS/cm possible – a must have in seawater analytic

### GLF 100 RW:

Universal applicability at highest standards is made possible by the use of stainless steel electrodes (1.4404, 1.4435).

## Option

- **LTG** (just with GLF 100)

**for organic matter (alcohol, petrol, diesel)  
up to max. 1000 µS/cm**

with glass shaft, platinum electrodes,  
1,35 m PUR-cable, fix connected with device

## Accessories

**GKL 100** Conductivity control solution (100 ml bottles with 1413 µS/cm. (acc. to DIN EN 27888))

**GKL 101** Conductivity control solution (250 ml bottles with 84 µS/cm)

**GKL 102** Conductivity control solution (100 ml bottles with 50 mS/cm)

① **GEH 1** Swivel-arm electrode-retainer (for up to 4 electrodes / probes)

**GWZ-01** Flow-through chamber (for measuring cell with Ø 12 mm, hose connection Ø 6 mm)

for additional accessories p.r.t.p. 60 - 62



# Water-proof handheld device for conductivity measurement with external electrodes

## Features

- Water-proof
- Serial interface and analog output
- Data logger and alarm function
- Measurement of conductivity, resistance, salinity, TDS
- Robust silicone protection cover
- Large double display
- Background illumination
- Incl. calibration protocol

## Application

Mobile use for:

- industry and craft
- measurements of waters and aquaristics
- fish farming
- drinking water monitoring, process control, soil measurements
- food production and control
- quality management

Additional applications at laboratory:

- medicine, pharmacy, chemistry



## GMH 5430 without electrode

## GMH 5450 analog output and data logger, without electrode

### Specifications GMH 5430 and GMH 5450

#### Measuring range:

**Number of meas. Ranges:** 5

*smallest range:* 0.000 ... 5.000  $\mu\text{S}/\text{cm}^*$  or 0.0 ... 500.0  $\mu\text{S}/\text{cm}^{**}$

*biggest range:* 0 ... 5000  $\mu\text{S}/\text{cm}^*$  or 0 ... 1000  $\text{mS}/\text{cm}^{**}$

Resistivity: 0.005 ... 500.0 kOhm/cm (depends on cell constant)

TDS: 0 ... 5000 mg/l cm (depends on cell constant)

Salinity: 0.0 ... 70.0 (g salt / kg water equals PSU = Practical Salinity Unit)

Temperature: -5.0 ... +100.0 °C, Pt1000 or NTC (10k)

#### Supported cell constants:

4.0000 ... 12.000 / cm - 0.4000 ... 1.2000 / cm - 0.04000 ... 0.12000 / cm - 0.004000 ... 0.012000 / cm

#### Accuracy (at nominal temp. 25 °C):

Conductivity:  $\pm 0.5\%$  of m.v.  $\pm 0.1\%$  FS (depends on electrode)

Temperature:  $\pm 0.2\text{ K}$

#### Connection:

Conductivity, temperature: 1x 7-pole bayonet connector for connection of different measuring cells supported temperature sensors: Pt1000 or NTC (10k)

Interface / ext. supply: 4-pole bayonet connector for serial interface and supply (with accessory: USB adapter USB 5100)

#### Display:

4 ½ digit 7-segment, illuminated (white)

#### Housing:

Protection class: IP65 / IP67

Dimensions: 160 x 86 x 37 mm (W x H x D) incl. silicone protection cover

Weight: approx. 250 g incl. battery and protection cover

#### Power supply:

2x AAA battery (included), power consumption 6.25 mA (Battery life time ca. 160 h)

*depends on cell constant of used electrode*

\* cell constant 0.01 / cm

\*\* cell constant 0.1 ... 1.2 / cm



# Handheld device for conductivity measurement

**GMH 5430** without electrode





**NEW**

**GMH 5450** analog output and data logger, without electrode



Functions	GMH 5430	GMH 5450
Min / max value memory	x	x
Hold / auto-hold	x	x
Auto power off	x	x
Low battery display "BAT"	x	x
Display of condition of battery	x	x
Background lightning	x	x
Period selectable (on/off or 5 s ... 2 min)		
Adjustment	Cell constant manually or automatically by selectable reference solution	
GLP (Good Laboratory Practice)	adjustable calibration intervals	adjustable calibration intervals Calibration memory: latest 16 calibrations
Real-time clock	x	x
Analog output	-	0 - 1 V, freely adjustable, connection with 4-pole bayonet connector, Resolution 13 bit, accuracy 0.05% at nominal temp.
Data logger	-	cyclic: 10.000 data sets Single value: 1.000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)
Min-/max-alarm	-	Permanent monitoring of alarm boundaries for conductivity and temperature: 3 alarm conditions - off: Alarm function inactive - on: Alarm report via display, integrated buzzer and interface - no Sound: Alarm report only via display and interface

## Electrodes

	Type	Measuring range	Cell constant	Temperature measurement	Dimensions	Characteristics	Applications
	LF 200 RW	0 ... 100 µS/cm	0,1	NTC 10k	Ø 12 mm	2-pole stainless steel	Pure and ultra pure water
	LF 210	0 ... 1000 µS/cm	1	NTC 10k	Ø 12 mm	2-pole glass/platinum	Alcohol, fuel, diesel
	LF 400	0 ... 200 mS/cm	0,55	NTC 10k	Ø 12 mm	4-pole graphite	Universal application, Economy Class
	LF 425	0 ... 1000 mS/cm	0,42	Pt 1000	Ø 16 mm	4-pole graphite	Tight tolerances, robust and precise for highest demands, High End Class

## General function description

**Min / Max Value Memory:** highest and lowest measured value is saved

**Auto-Hold:** automatic freezing of a constant measuring value

**Auto Power Off:** device is automatically switched off after a selected period if unused (0 to 120 min, or deactivated)

**Additional Display for Battery and Low Battery Display "BAT"**

**Automatic temperature compensation:** As conductivity depends strongly on temperature, each conductivity value is only valid at the corresponding temperature. Therefore the device supports temperature compensation, i.e. referring the conductivity to a reference temperature (selectable: 20 °C or 25 °C).

**Salinity measurement:** Salinity means the sum of the concentrations of all dissolved salts in water. The unit is g/kg.

**TDS measurement (total dissolved solids):** TDS means the mass concentration of dissolved media in a liquid. The unit is mg/l.

## Accessories

**EBS 20M** software for long-term monitoring (p.r.t. page 58)

**GSOFT 3050** (p.r.t. page 58)  
Software for operation of logger devices

**USB 5100**  
Electrically isolated interface converter, supplied via USB

**GKK 3500** (p.r.t. page 56)  
Device case with eggcrate foam and cut-outs for 1 device (394 x 294 x 106 mm)

**GEH 1** (p.r.t. page 56)  
Electrode holder for measuring electrodes with plastic handle

**GNG 05/5000** (p.r.t. page 61)



# Conductivity measuring devices



- Wide measuring range from 0,0  $\mu\text{S/cm}$  to 200,0  $\text{mS/cm}$  manually selectable or automatic range selection
- Double display for conductivity and temperature
- Display of resistance, salinity or TDS (dry residue of filtrate)
- Conform to the regulations of the drinking water ordinance (TrinkwV 2001) and DIN EN 27888
- Automatic temperature compensation, reference temp. ( $20^\circ\text{C}/25^\circ\text{C}$ ) selectable
- Extremely small measuring probe (dimensions as for pH-probe)
- Min./Max. value memory, Hold function,
- Serial interface, device can be connected to bus system (up to 5 devices can be connected to one PC interface)
- Battery and d.c. operation

## GMH 3430

Conductivity measuring device incl. probe

### Specification:

#### Measuring range:

<b>Conductivity:</b>	0,0 ... 200,0 $\mu\text{S/cm}$ 0 ... 2000 $\mu\text{S/cm}$ 0,00 ... 20,00 $\text{mS/cm}$ 0,0 ... 200,0 $\text{mS/cm}$ <i>manual setting or auto range</i>
<b>Temperature:</b>	-5,0 ... +100,0 $^\circ\text{C}$
<b>Resistivity:</b>	0,005 ... 100,0 $\text{k}\Omega \cdot \text{cm}$
<b>Salinity:</b>	0,0 ... 70,0
<b>TDS:</b>	0 ... 1999 $\text{mg/l}$
<b>Resolution:</b>	0,1 $\mu\text{S/cm}$ ; 1 $\mu\text{S/cm}$ ; 10 $\mu\text{S/cm}$ or 0,1 $\text{mS/cm}$ 0,1 $^\circ\text{C}$ 0,001 $\text{k}\Omega$ ; 0,01 $\text{k}\Omega$ or 0,1 $\text{k}\Omega$ 0,1 (salinity) 1 $\text{mg/l}$

**Accuracy:** ( $\pm 1$  digit) (at nominal temperature =  $25^\circ\text{C}$ )

**Conductivity:**  $\pm 0,5\%$  of m.v.  $\pm 0,3\%$  FS or  $\pm 2\mu\text{S/cm}$

**Temperature:**  $\pm 0,2\%$  of m.v.  $\pm 0,3\text{K}$

**Cell constant:** adjustable from 0.800 ... 1.200  $\text{cm}^{-1}$

**Temp. compensation:** automatic or off

#### Compensation coefficient:

- nLF: non-linear function of natural water according to EN27888 (DIN38404) (reference temperature adjustable  $20^\circ\text{C}$  or  $25^\circ\text{C}$ )
- Lin: linear compensation from 0,3 ... 3,0  $\%/K$  (reference temperature adjustable  $20^\circ\text{C}$  or  $25^\circ\text{C}$ )
- off: no compensation

**Display:** 2 four digit LCDs (12.4mm and 7mm high) for conductivity (resistance, salinity, TDS) and temperature, min./ max values, hold function, etc. as well as additional functional arrows.

**Measuring cell:** 2-pol conductivity measuring cell; temperature sensor integrated in shaft. Electrode material: graphite. The graphite electrodes are the optimum solution for sewage and can be cleaned easily.

**Warranty for sensor element:** 12 months

**Working temperature:** 0 to  $+50^\circ\text{C}$  (device)  
meas. cell: 0 to  $+80^\circ\text{C}$  (permanent) 0 to  $+100^\circ\text{C}$  (short time)

**Relative humidity:** 0 to  $+95\%$  RH (non-condensing)

**Min/Max-value memory:** max. and min. values as well as the corresponding temperature will be memorized.

**Hold function:** the current meas. value will be 'frozen'.

**Interface:** serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface converter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

**Pushbuttons:** 6 membrane keys for ON/OFF-switch, selection of meas. range, min- and max-value memory, hold-function, etc.

**Power supply:** 9V-battery, type IEC 6F22 (included) as well as additional d.c. connector (internal pin  $\varnothing 1.9\text{mm}$ ) for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)

**Power-Off-function:** Device will be automatically switched off if no key is pressed/no interface communication takes place for the time of the power-off delay. The power-off delay can be set to values between 1 and 120 min.; it can be completely deactivated.

**Low battery warning:**  $\Delta$  and 'bAt'

**Power consumption:** approx. 3,5 ... 6,7 mA

**Housing dimensions (device):** 142 x 71 x 26 mm (H x W x D)  
Impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip for table top or suspended use.

**Electrode dim.:** approx. 120 mm long,  $\varnothing$  approx. 12 mm, 1 m of fixed connection cable between electrode and device.

**Weight:** approx. 255 g (incl. batteries and measuring cell)

**Automatic temperature compensation:** The conductivity is highly dependant on the temperature, i.e. it is only valid for one temperature. For better comparison the device offers the possibility to compensate the conductivity to a reference temperature (adjustable  $20^\circ\text{C}$  or  $25^\circ\text{C}$ ).

**Temperature measurement:** The temperature of the agent can be displayed by means of the temperature probe integrated in the electrode.

**AutoRange:** Automatic selection of to the optimum meas. range for conductivity measurements. AutoRange mode can be deactivated by pressing a button.

**Salinity determination:** Salinity is understood to be the sum of concentrations of all salts dissolved in water. Reading in g/kg.

**TDS-determination (dry residue of filtrate):** The dry residue of filtrate is understood to be the concentration of substances dissolved in a liquid. Reading in  $\text{mg/l}$ .

### Option:

#### - LTG

for organic matter (alcohol, petrol, diesel)  
up to max. 1000  $\mu\text{S/cm}$

with glass shaft, platinum electrodes,  
1,35 m PUR-cable, fix connected with device



### Accessories:

**GKL 100** 100ml conductivity control solution  
(100ml bottles with 1413  $\mu\text{S/cm}$ , pursuant to DIN EN 27888)

miscellaneous accessories (case, power supply, etc.)  
suitable for all GMH3xxx devices p.r.t.p. 60 - 62

# pH / Redox handheld instruments



pH/Redox



oxygen

Application:	Device	GMH 5530	GMH 5550	GMH 3530	GPH 014	GPRT 1400 AN	GMH 3610	GMH 3630	GOX 20
Waters measuring, fish-keeping, aquafarming		✓	✓	✓	✓	✓	✓	✓	✓
Drinking water-, process monitoring, ground measurements		✓	✓	✓	✓	✓	✓	✓	✓
Food production and -control		✓	✓	✓	✓	✓			
Precision measurement		✓	✓	✓					
Laboratory (GLP)		✓	✓						
Quality management		✓	✓	✓		✓			
Data storage			✓						
Water-proof		✓	✓						
incl. air pressure measuring								✓	

Function / Equipment:	Device	GMH 5530	GMH 5550	GMH 3530	GPH 014	GPRT 1400 AN	GMH 3610	GMH 3630	GOX 20
<b>Specification</b>									
Meas. range		-2,000..16,000 pH (selectable resolution) -2000,0..2000,0 mV (selectable resolution) redox/mV 0,0..70,0 rH		0,00..14,00 pH -1999..2000 mV redox/mV 0,0..70,0 rH	0,00..14,00 pH	0,00..14,00 pH -1999..1999 mV redox/mV	O <sub>2</sub> -concentration: 0,0 ... 25,0 mg/l O <sub>2</sub> -saturation: 0 ... 300 %	O <sub>2</sub> -concentration: 0,0 ... 70,0 mg/l O <sub>2</sub> -saturation: 0 ... 600 % O <sub>2</sub> -partial pressure: 0 ... 1200 hPa O <sub>2</sub> pressure: 500 ... 1100 hPa abs	O <sub>2</sub> -concentration: 0,0 ... 20,0 mg/l
Temperature		-5,0..150,0 °C		-100,0..+250,0 °C		-20,0..+110,0 °C	0,0 ... 50,0 °C	0,0 ... 50,0 °C	0,0 ... 40,0 °C
Accuracy		±0,005 pH ±0,05 % FS (mV) Redox/mV ±0,1 rH		±0,01 pH ±0,1 % FS (mV) redox/mV ±0,1 rH	±0,02 pH	±0,02 pH ±0,2 % v. MW. ±1 Digit	±1,5% v. MW ±0,2 mg/l	±1,5% v. MW ±0,2 mg/l (0...25mg/l)	O <sub>2</sub> -concentration: ±0,2 % v. MW. ±0,2 mg/l
Temperature		±0,2 °C		±0,2 °C		±0,5 °C ± 1 Digit	±0,1 °C ±1Digit		±0,3 °C (0-30 °C)
Connections		BNC-female connector 2 banana-jack		BNC-socket 4-pole Mini-DIN	CINCH-socket --	CINCH-socket 3,5mm jack connect.	6-pole Mini-DIN-socket		Electrode permanently connected to device.
Temperature-compensation		automatic and manual (Pt1000, NTC 10k)		automatic and manual (PT100)	manual	automatic and manual	automatic	automatic	manual
<b>Functions</b>									
General functions		Min/Max, Hold, Auto-Off, adjustable calibration intervals		Min/Max, Hold, Auto-Off			Min/Max, Hold, Auto-Off	Min/Max, Hold, Auto-Off, correction of salinity	
Interface		✓	✓	✓			✓	✓	
Analog output			✓			✓			
Calibration memory			✓						
Data logger, alarm			✓						
Catalog page		p. 34-35	p. 34-35	p. 36	p. 38	p. 38	p. 39	p. 39	p. 39

Handheld instrument

Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

# Waterproof handheld measuring device for pH / Redox

## Features

- Waterproof (device and plug connections)
- Serial Interface and analog output
- Data logger- and alarm function
- GLP-features (Good Laboratory Practice)
- Robust silicone protection cover
- Big dual display
- Background lightning
- High resolution (0.001pH / 0.1 mV)
- Incl. calibration protocol

## Field of application

- Waters measuring, fishkeeping, aquafarming
- Drinking water monitoring, process control, soil measuring
- Food production and monitoring
- Laboratory: Medicine, pharmaceuticals, chemistry
- Quality management



## GMH 5530 without electrode

## GMH 5550 with analog output and data logger, without electrode

### Technical data

#### Measuring ranges:

pH:	-2.000 ... 16.000 pH
Redox / mV:	-2000.0 ... 2000.0 mV (for hydrogen system DIN38404: -1792 ... +2207 mV <sub>H</sub> )
Temperature:	-5.0 ... +150.0 °C 23.0 ... 302.0 °F
rH:	0.0 ... 70.0 rH

#### Accuracy:

pH:	±0.005 pH
Redox / mV:	±0.05 % FS (mV or mV <sub>H</sub> )
Temperature:	±0.2 °C (in the range of -5,0 ... 100,0 °C)
rH:	±0.1 rH

#### Connections:

pH, Redox:	BNC-female connector, compatible to standard BNC-plugs and waterproof BNC-plugs, additional banana-jack (4 mm) for separate reference electrode input resistance: 10 <sup>12</sup> Ohm
Temperature:	2 banana-jacks (4 mm) for temperature probes (Pt1000 or NTC 10K)
Interface / Supply:	4-pole bayonet connector for serial interface and supply (with accessory USB 5100)
Display:	two 4½ - digit seven-segment display (15 mm and 12 mm)
pH-Calibration	
Automatically:	1-, 2- or 3- point calibration, GREISINGER-Standard-Buffer or Puffer to DIN19266 (A,C,D,F,G)
Manually:	1-, 2- or 3- point calibration
Protection class:	IP67 (Housing and connections)
Dimensions / Weight:	160 x 86 x 37 mm (H x W x D) incl. protection cover / 250 g incl. battery and protection cover
Housing:	impact resistant ABS housing with pop-up clip
Power supply:	2 x AAA-battery (incl. in scope of supply) power consumption: <1.0 mA
Battery life time:	1000 hours



# Handheld measuring device for pH / Redox

**GMH 5530** without electrode

**GMH 5550** with analog output and data logger, without electrode

Functions	GMH 5530	GMH 5550
Min / max value memory	x	x
Hold / auto-hold	x	x
Auto power off	x	x
Low battery display "BAT"	x	x
Display of condition of pH-electrode	x	x
Background lightning	x	x
Period selectable (on/off or 5 s ... 2 min)		
Automatic temperature compensation	x	x
Adjustable calibration intervals (GLP)	x	x
Calibration memory (GLP)	-	x
Analog output	-	0 - 1 V, freely adjustable, connection with 4-pole bayonet connector, Resolution 13 bit, accuracy 0.05% at nominal temp.
Data logger	-	With measuring point input Recording interval: 1 s ... 1 h Recording period: 416 days at interval 1 h Value memory: cyclic: 10000 data sets; singular: 1000 data sets
Real-time clock	-	x
Min-/max-alarm	-	Permanent monitoring of alarm boundaries 3 alarm conditions - off: Alarm function inactive - on: Alarm report via display, integrated buzzer and interface - no Sound: Alarm report only via display and interface



## General function description

**Min / Max Value Memory:** highest and lowest measured value is saved

**Auto-Hold:** automatic freezing of a constant measuring value

**Auto Power Off:** device is automatically switched off after a selected period if unused (0 to 120 min, or deactivated)

**Additional Display for pH-Electrode and Battery:** Bar graph display

**Low Battery Display "BAT"**

**Automatic Temperature Compensation:**

There is an automatic temperature compensation (ATC) in the range of 0-105 °C for operation mode "pH" and if a temperature probe is connected.

Without connected probe the temperature can be input manually.

**pH-Calibration:**

The used buffer is detected automatically. The temperature dependency of the buffer is automatically compensated.

Permissible electrodes' data: Asymmetry: ±55 mV / Slope: 45 ... 62 mV/pH

The condition of pH-Electrode is checked at each calibration.

1-, 2- or 3- point calibration with characteristics bend for GREISINGER-Standard-Buffer, buffer to DIN 19266 or manual buffer input

**Redox-Measurement (ORP):**

2 choices:

"mV" Standard-redox- or mV- measurement

"mVH" Conversion to hydrogen systems according to DIN38404 Teil 6

**rH-Measurement**

The rH-value is calculated from a measured Redox-value and a manually input pH-value.


## Accessories

**GE 125** waterproof pH-electrode with integrated Pt1000 temperature sensor incl. waterproof BNC-plug (p.r.t. page 37)

**GE 117** (p.r.t. page 37)  
pH-electrode with integrated Pt1000 temperature sensor

**GTF 55 B**

Pt1000 temperature immersion sensor for liquids  
1 m PVC-cable with banana plugs



**GE 100 BNC** pH-electrode (p.r.t. page 37)

**GE 105 BNC** Redox-electrode (p.r.t. page 37)

**GAK 1400** Working and calibration set (p.r.t. page 37)

**PHL 4** pH buffer (pH 4,01 / 25 °C) 250 ml

**PHL 7** pH buffer (pH 7,00 / 25 °C) 250 ml

**PHL 10** pH buffer (pH 10,01 / 25 °C) 250 ml



**GMH 55 ES**

Supplementary set, including pH-electrode (GE 100 BNC), temperature probe (GTF 55 B), case (GKK 3500), working and calibration set (GAK 1400)

**EBS 20M** Software for long-term monitoring (p.r.t. page 62)

**GSOFT 3050** (p.r.t. page 62)

Software for operation of logger devices

**USB 5100**

Electrically isolated interface converter with supply of device via USB

# pH-/redox-/temperature measuring devices



- Double display for pH or redox and temperature
- Redox mode allows for automatic conversion to a hydrogen system.
- Automatic or manual temperature compensation
- Automatic buffer detection
- rH-measurements
- Evaluation of probe quality
- Battery and d.c. operation
- Serial interface
- Device can be used as thermometer, too

## GMH 3530 without accessories

## GMH 35 ES additional set

pH-electrode GE100BNC, temperature probe GTF35 (Pt100 4-wire), case GKK3500 and GAK1400

### Specification:

#### Measuring ranges:

**Temperature:** -100,0 ... +250,0°C  
or -148,0 ... +482,0°F

**pH:** 0,00 ... 14,00 pH

**Redox (ORP):** -1999 ... +2000 mV.  
for hydrogen system (DIN38404):  
-1792 ... +2207 mV<sub>H</sub> (at 25°C)

**rH:** 0,0 ... 70,0 rH

**Accuracy:** (device) ±1 digit at nominal temperature = 25°C

**Temperature:** ±0,2°C (-20...+80°C),  
otherwise ±0.4°C

**pH:** ±0,01 pH

**Redox (ORP):** ±0,1% FS (mV or mV<sub>H</sub>)

**rH:** ±0,1rH

#### Sensor connections:

**Temperature:** 4-pin screened Mini-DIN-socket.  
for Pt100 4-wire (2-wire possible)

**pH, Redox:** BNC-socket

**Input resistance:** (pH, Redox) 10<sup>12</sup> Ohm

**Display:** 2 four digit LCDs  
(12.4 mm or 7 mm high)

**Working temperature:** 0 to +50°C

**Storage temperature:** -20 to +70°C

**Interface:** serial interface, direct connection to RS232  
or USB interface of a PC via electrically isolated interface  
converter GRS 3100 or GRS 3105 resp. USB 3100 N  
(p.r.t. accessories).

**Power supply:** 9V-battery, type IEC 6F22 (in-  
cluded) as well as additional d.c. connector (internal  
pin Ø 1.9mm) for external 10.5-12V direct voltage  
supply. (suitable power supply: GNG10/3000)

**Power consumption:** approx. 3 mA

**Housing dimensions (device):** 142 x 71 x 26  
mm (H x W x D), Impact-resistant ABS plastic  
housing, membrane keyboard. Front side IP65, in-  
tegrated pop-up clip for table top or suspended use.

**Weight:** approx. 165 g

#### Functions:

**Min/Max-value memory, Hold function, Auto-  
Off-Function, Low battery warning**

**Automatic temperature compensation:** Auto-  
matic temp. comp. (ATC) if temperature probe is  
plugged in and operating mode is "pH".  
Temperatur compensation ragen: 0 - 105°C.  
Manual temperature input if no probe connected.

**pH-calibration:** automatic buffer detection. Auto-  
matic compensation of temperature dependance  
of buffers.

acceptable electrode data:

Asymmetry: ±55 mV

Slope: 45...62 mV/pH

Sensor evaluation depending on calibration re-  
sults (10 to 100%), displayed by pressing a key.

Opt. 2- or 3-point-calibration with bend of the  
characteristics for GREISINGER-standard-buffer  
(pH4.01, pH7.00, pH10.01), buffers acc. to  
DIN19266 (A,C,D,F,G) or manual buffer entry.

#### Redox-Measurements(ORP):

you have 2 choices:

"mV" standard-redox- or mV-measurement

"mV<sub>H</sub>" Temp. compensated conversion to  
hydrogen system acc. to DIN38404 part 6, table  
1 based on the standard redox electrode (e.g.  
GE105 with Ag/AgCl system and 3mol KCl)  
used.

**rH-measurement:** Calculation of the rH value  
by means of a redox measuring and by manu-  
ally entering the pH-value. The  
pH-value can also be taken from a previous pH  
measurement.

**Temperature measurements:** Display of current  
value 12.4 mm high for thermometer mode. Min-  
/Max- or Hold values can be displayed in the  
second 7 mm high display.

### Accessories:

#### GTF 35

temperature probe, Pt100 4-wire (p.r.t. page 123)

#### GE 100 BNC

Standard-electrode, BNC-plug

#### GE 109

pH electrode with integr. Pt100, without thread, BNC-  
plug and MiniDIN-plug (suitable for GMH3530)

#### GNG 10/3000

plug-in power supply (recommend for logger application!)

#### GKK 3000

case with cut-outs for GMH3xxx

#### USB 3100 N

interface converter to USB, electrically isolated



#### EBS 20M

software for transmission, recording and archiving meas-  
uring values obtained from 1 GMH3xxx (p.r.t. p. 62)

**miscellaneous accessories (case, mains  
adaptors, etc.) p.r.t. p. 60 - 62**

# pH-electrodes for goods and food, etc.



	GE 101	GE 120
Measurand	pH	pH
Measuring range	2 - 11 pH 0 - 60 °C	0 - 14 pH 0 - 80 °C
Conductivity	> 200 µS	> 200 µS
Temperature meas.	no	no
Water proof	no	no
Pressure resistant	no	no
Cable	1 m	1 m
Electrolyte	3 mol/l KCL	3 mol/l KCL
Thread	without	without
Application	foods, suspensions, ground survey, etc.	frozen food, meat, cheese, etc.
Temperature connection	-	-
<b>Connection:</b>		
<b>Cinch</b> 		
<b>BNC</b> 		

### Options, upcharges:

#### - Cable extension

(available cable length: 1, 2, 5 und 10 m)

#### - Special disign types upon request

(electrodes with thread, other length, special  
applications etc.)

### Accessories:

#### VD120

injection aid for injection electrode GE101

#### GAD 1 CINCH

Adapter for the plug-in of electrodes with  
Cinch-plugs to devices with BNC-sockets

#### GAD 1 BNC


Adapter for the plug-in of electrodes with  
BNC-plugs to devices with Cinch-sockets.



#### GPF 100

Plastic bottle with wide neck, 100ml

**miscellaneous accessories  
p.r.t. p. 37**
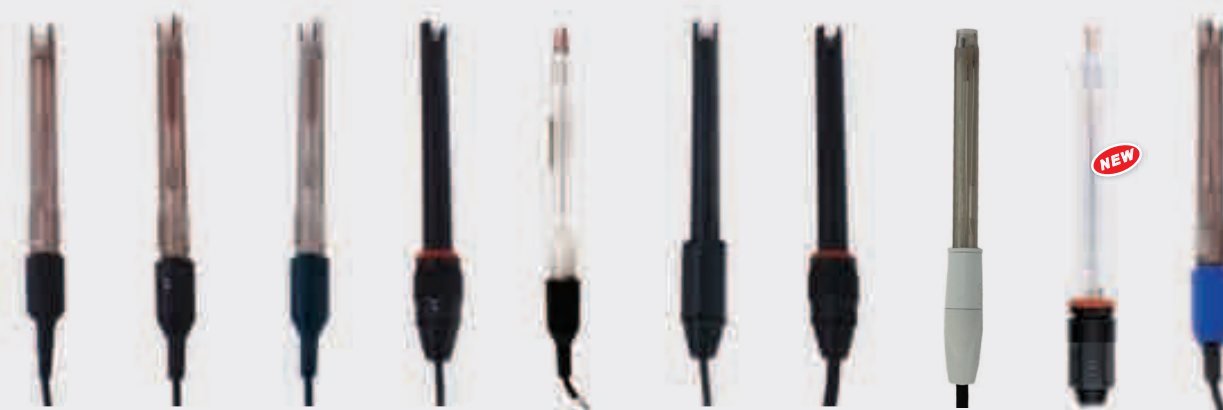
# pH-electrodes, redox electrodes and accessories



	<b>GE 014</b>	<b>GE 100</b>	<b>GE 106</b>	<b>GE 108</b>	<b>GE 151</b>	<b>GE 109</b>	<b>GE 117</b>	<b>GE 125</b>	<b>GE 173</b>	<b>GE 105</b>
Measurand	pH	pH	pH	pH	pH	pH	pH	pH	pH	Redox
Measuring range	2...12 pH 0...60 °C	0...14 pH 0...80 °C	2...11 pH 10...80 °C	0...14 pH 0...80 °C	0...14 pH -5...+80 °C	0...14 pH 0...60 °C	0...14 pH 0...60 °C	0...14 pH 0...70 °C	0...14 pH 0...80 °C	± 2000 mV 0...80 °C
Conductivity	> 200 µS	> 200 µS	> 25 µS	> 200 µS	> 200 µS	> 200 µS	> 200 µS	> 200 µS	> 50 µS	> 25 µS
Temperature meas.	no	no	no	no	no	integr. Pt100	integr. Pt1000	integr. Pt1000	nein	no
Water proof	no	no	no	no	no	no	no	yes	nein	no
Pressure res.	no	no	no	6 bar	no	6 bar	6 bar	1 bar	6 bar	no
Cable	1 m	1 m	1 m	2 m	1 m	2 m	2 m	2 m	1 m	1 m
Electrolyte	3 mol/l KCL	3 mol/l KCL	3 mol/l KCL	Gel-Elektrolyt	3 mol/l KCL	Gel-Elektrolyt	Gel-Elektrolyt	Gel-Elektrolyt	Gel-Elektrolyt	3 mol/l KCL
Thread	without	without	without	PG13.5	without	without	PG13.5	without	PG13.5	without
Application	environmental analysis, baths, aquarium, water treatment etc.	environmental analysis, baths, aquarium, water treatment etc.	low-ionic media, VE-water, discus-fishes etc.	environmental analysis, baths, aquarium, water treatment etc.	electroplating, partly for paints and varnishes, alkali resistant	environmental analysis, baths, aquarium, water treatment etc.	environmental analysis, baths, aquarium, water treatment etc.	environmental analysis, Bbaths, aquarium, water treatment, food & beverage	biogas plants, water soluble lacquers, electroplating, process chemistry	aquarium, ground survey, chemical analysis, sewage etc.
Temperature connection	-	-	-	-	-	Mini-DIN	4 mm Banana	4 mm Banana	-	-
<b>Connection:</b>										
<b>Cinch</b> 										
<b>BNC</b> 										

**Note:** electrodes are consumption objects. Lifetime under careful treatment: > 2 Years / Warranty: 12 Month

## Options, upcharges:

### - Cable extension

(available cable length: 1, 2, 5, other upon request)

### - Special design types

(electrodes with thread, other length, special applications etc.)

## Accessories:

- GPH 4,0 / 5** Buffer capsule (5 pcs), pH4.0
- GPH 4,0 / 10** Buffer capsule (10 pcs), pH4.0
- GPH 7,0 / 5** Buffer capsule (5 pcs), pH7.0
- GPH 7,0 / 10** Buffer capsule (10 pcs), pH7.0
- GPH 10,0 / 5** Buffer capsule (5 pcs), pH10.0
- GPH 10,0 / 10** Buffer capsule (10 pcs), pH10.0
- GPH 12,0 / 5** Buffer capsule (5 pcs), pH12.0
- GPH 12,0 / 10** Buffer capsule (10 pcs), pH12.0

All buffer salts are directly traceable to NIST standards and certified to ±0.02pH units at 25°C.

**GAK 1400** Working and calibration set cons. of 5 buffer caps. each ( GPH4,0, GPH7,0 und GPH10,0), 3 x GPF100, 1 x 3 mol KCl-electrolyte KCL3M and 1 x Pepsin-cleaning agent GRL100.

**KCL 3 M** 3 mol KCl-electrolyte for refilling and storage (fill into protective cap) of electrodes with 3 mol KCl electrolyte, injection bottle, 100 ml

**CaCl** 1000 ml solution for measuring the pH-value of soil

**GRL 100** Pepsin-cleaning agent, 100ml

**GRP 100** Redox testing solution (220mV at 25°C), 100ml

**GAD 1 CINCH** Adapter for the plug-in of electrodes with Cinch-plugs to devices with BNC-sockets.

**GAD 1 BNC** Adapter for the plug-in of electrodes with BNC-plugs to devices with Cinch-sockets.

**GWA1Z** thread adapter PG13.5 to G1", plastics

**PG 13.5** plug on thread adapter for pressureless use, for any electrode

**miscellaneous accessories p.r.t. p. 36**



digital pH-Meter

## GPH 014

Device ready for use incl. pH-electrode type GE 014 and battery. (no buffer solutions)

### Specification:

<b>Measuring range (device):</b>	0.00 up to 14.00 pH
<b>Resolution:</b>	0.01 pH
<b>Accuracy</b>	(device) at nominal temperature = 25°C: ±/-0.02 pH +/- 1 digit
<b>Input resistance:</b>	10 <sup>12</sup> Ohm
<b>pH-electrode:</b>	combined measuring and reference electrode type GE 014 with refillable 3 mol-KCl electrolyte, 2-12 pH, 0 to 60° C
<b>Calibration:</b>	3 turning knobs for: - temperature compensation 0 to 90° C - pH7 value - pH x-value (eg 4,0, 10,0, 12,0)
<b>Working temperature:</b>	0 to 45 °C
<b>Display:</b>	3½-digit LCD display, 13mm high
<b>Power supply:</b>	9V battery type JEC 6F22 (incl.)
<b>Low battery warning:</b>	automatic; "BAT" displayed in case of low voltage
<b>Battery service life:</b>	approx. 200 operating h
<b>Dimensions:</b>	approx. 106 x 67 x 30 mm (H x W x D). Impact resistant ABS housing.
<b>Weight:</b>	approx. 200 g (incl. battery and electrode)

## GAK 1400

### Working and calibration set:

Working and calibration set consisting of 5 buffer capsules each **GPH4.0**, **GPH7.0** and **GPH10.0**, 3 x 100ml-plastic bottle **GPF100**, 1 x 3 mol KCL-electrolyte **KCL3M** and 1 x Pepsin-cleaning agent **GRL100**.  
GAK1400 is required if no buffer solutions are existing at your works.

### Accessories:

<b>GE 014</b>	Spare electrode
<b>GPH 014 GL</b>	Loose device (without accessories)
<b>GE 100</b>	Better electrode (0-14pH, 0-80°C)
<b>GE 101</b>	Injection electrode (2-11pH, 0-60°C)
<b>GE 106</b>	pH-electrode for low-ion water (as of 25 µS/cm)
<b>GKK 252</b>	Case (235 x 185 x 48 mm) with foam lining
<b>GKK 1100</b>	Case (340 x 275 x 83 mm) with foam lining
<b>GB 9 V</b>	Spare battery

for add. accessories p.r.t. p. 35, 60 - 62

### automatic temperature compensation



digital pH- / mV- / Thermometer

## GPRT 1400 AN

Device ready for use incl. pH-electrode GE100, buffer capsules pH4 and pH7, two 100ml-plastic bottles as well as temperature probe.

Battery/mains operation, analog output: 1mV/digit, ATC = Automatic Temperature-Compensation.

### Specification:

<b>Measuring range:</b>	
Position 1 (pH):	0,00 ... 14,00 pH
Position 2 (°C):	-20,0 ... +110,0 °C
Position 3 (mV):	-1999 ... +1999 mV
<b>Resolution:</b>	0,01pH, 0.1°C or 1mV
<b>Accuracy (device):</b>	(at nominal temperature = 25°C)
(pH):	± 0,02 pH ± 1 digit
(°C):	± 0,5 °C ± 1 digit (range: -10 to 110°C)
(mV):	± 0,2 % of m.v. ± 1 digit
<b>Input resistance:</b>	10 <sup>12</sup> Ohm
<b>pH-electrode:</b>	combined measuring and reference electrode type GE 100 with refillable 3 mol-KCl electrolyte 0-14 pH, 0-80 °C
<b>Attention!</b>	<i>The pH-electrode does not allow for redox-measurements! Please order redox electrode GE105 separately, if required (p.r.t. p. 37)</i>
<b>Temperature probe:</b>	silicon temperature probe, electr. insulated in V4A-pipe, 6mm Ø, approx. 100mm length, approx. 1m silicone cable with 3.5mm Ø jack connector for connection to front-side socket.
<b>Instrument is calibrated to included probe. If probe is replaced a new calibration is necessary.</b>	

<b>Calibration:</b>	3 turning knobs for - temperature compensation 0-90°C (automatically when probe is plugged in) - pH7-value - pHX-value (eg. 4.0, 10.0, 12.0)
<b>Working temperature:</b>	0 to 45 °C
<b>Display:</b>	3½-digit LCD display, 13mm high
<b>Analog output:</b>	1mV / digit, connection via 3.5 mm Ø jack connector (jack connector included)
<b>Power supply:</b>	9V-battery type IEC 6F22 (incl.). Additional power supply connector socket 2,5mm Ø.
<b>Low battery warning:</b>	automatic; "BAT" displayed in case of low voltage.
<b>Battery service life:</b>	approx. 100 operating h
<b>Dimensions:</b>	approx. 150 x 86 x 30 mm (H x W x D). Impact resistant ABS housing with integrated pop-up clip for table top or suspended use, electrode clipped on at the side
<b>Weight:</b>	approx. 330 g (ready for use)

### Accessories:

<b>GPRT 1400 AN GL</b>	loose device
<b>GTF 1400 B</b>	spare temperature probe

for add. accessories p.r.t. p. 35, 60 - 62

# Oxygen measuring devices for dissolved oxygen in liquids



- Double display for oxygen and temperature
- Meas. units: O<sub>2</sub>-concentration, O<sub>2</sub>-saturation and O<sub>2</sub>-partial pressure (GMH3630 only)
- Automatic air pressure compensation
- Salinity correction
- Extremely small measuring probe
- Min./Max. value memory, Hold function
- Serial interface
- Battery and d.c. operation
- Simple calibration in atmospheric air

## GMH 3610 incl. oxygen electrode

## GMH 3630 incl. oxygen electrode

### Difference between GMH3630 and GMH3610:

Additional features of GMH3630:

- Measuring of air pressure by means of integrated pressure sensor
- Extended measuring range for O<sub>2</sub>
- O<sub>2</sub>-partial pressure measurement
- Correction of salinity

### Specification :

#### Measuring ranges:

##### O<sub>2</sub>-concentration:

3610: 0,0 ... 25,0 mg/l  
3630: 0,0 ... 70,0 mg/l / 0,00 ... 25,00 mg/l

##### O<sub>2</sub>-saturation:

3610: 0 ... 300 %  
3630: 0 ... 600 % or 0,0 ... 250,0 %

##### O<sub>2</sub>-partial pres.:

3630: 0 ... 1200 hPa or 0,0 ... 570,0 hPa  
(0,0 ... 427,5 mmHg / 0 ... 900 mmHg)

##### Temperature:

3610 / 3630: 0,0 ... 50,0 °C

##### Pressure:

3630: 500 ... 1100 hPa abs.

##### Accuracy: (at nominal temperature = 25°C)

##### Oxygen:

3610: ±1,5% of m.v. ±0.2 mg/l  
3630: ±1,5% of m.v. ±0.2 mg/l (0...25mg/l)  
±2,5% of m.v. ±0.3 mg/l (25...70mg/l)

##### Temperature:

±0,1°C ±1digit

##### Pressure:

±0,5% FS ±1digit

##### Sensor connection:

6-pin screened Mini-DIN-socket.

##### Electrode:

active membrane type. Electrode-Ø front: approx. 12mm, overall length: approx. 220 mm, anti buckling glanding, neck collar: Ø approx. 20 mm, 4 m connection cable with Mini-DIN-plug.

##### Response time:

95% in 10sec., dep. on temperature.

##### Operation life:

approx. 3 years or more, dep. on maintenance

##### Working temp.:

0 to +40°C

##### Working pressure:

max. 3 bar

##### Flow rate:

min. 30 cm/sec.

**Display:** 2x 4 digit LCDs (12.4 / 7 mm high)

**Interface:** serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface converter.

##### General Functions:

**Min-/Max-value memory, Hold function, Auto-Off-Function, Low battery warning**

**Power supply:** 9V-battery, type IEC 6F22 (included) as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power pack: GNG10/3000)

**Power consumption:** approx. 3 mA

##### Housing dimensions:

142 x 71 x 26 mm (H x W x D), impact-resistant ABS, Front side IP65, integrated pop-up clip for table top or suspended use.

**Weight:** approx. 300 g (incl. battery and probe)

**Temperature compensation:** automatic via temperature sensor integrated in electrode.

##### Air pressure compensation:

**3610:** enter current air pressure via keyboard

**3630:** automatic via integrated pressure sensor. Display of current air pressure.

**Correction of salinity (3630):** autom. salinity value can be set via keyboard from 0,0 ... 70,0

**Calibration:** 1-point calibration: extremely simple quick calibration in atmospheric air.

2-point calibration (GMH3630 only): first point at atmospheric air, second point at upper measuring range (with calibration set GKS3600).

**Scope of supply:** device incl. electrode, GWOK01 and KOH electrolyte



## GOX 20

Device incl. oxygen probe

### Specification:

#### Measuring range:

Temperature: 0.0 ... 40.0 °C  
Oxygen: 0.0 ... 20.0 mg/l O<sub>2</sub>

#### Resolution:

Temperature: 0.1 °C  
Oxygen: 0.1 mg/l O<sub>2</sub>

#### Accuracy: (at 25°C) ±1digit

Temperature: ±0.3°C (range 0-30°C)  
Oxygen: ±2% of m.v. ±0.2 mg/l

#### Electrode:

active diaphragm type. Electrode-Ø front: approx. 12mm, length: approx. 170mm, connecting cable approx. 2 m permanently connected to device.

#### Response time:

95% in 10sec., depending on temperature approx. 3 years or more dependant on maintenance

#### Operation life:

**Operation pressure:** max. 3 bar

**Temperature compensation:** automatically via temperature sensor integrated in electrode

**Calibration:** simple quick-calibration in atmospheric air

#### Display:

3½-digit LCD display, 13mm high

**Working temperature:** 0 to 50 °C

**Storage temperature:** -5 to 70 °C

**Power supply:** 9V-battery type IEC 6F22

**Power consumption:** max. 1 mA

**Low battery warning:** automatic; "BAT"

#### Dimensions:

106 x 67 x 30 mm, ABS plastic housing approx. 250 g (ready for use)

#### Weight:

**Scope of supply:** device incl. electrode, GWOK01 and KOH electrolyte

### Options (upcharges) / accessories:

- electrode with 10 m cable
- electrode with 30 m cable

#### GSKA 3600

protection cap for depth measuring

#### GWOK 01 spare diaphragm head

**GKS 3600** calibration set (consisting of calibration device, 100 ml calibration solution, 10 ml catalytic solution, measuring pipette and measuring bottle)

**GKN 3600** calibration refill set (consisting of 100ml calibration solution, 10ml catalytic solution, meas. pipette)

**GAS 3600** Working set (consisting of 3 spare diaphragm heads and 100ml KOH-electrolyte)

#### GWO 3600

Spare electrode with 4 m cable

**KOH 100** Spare electrolyte 100 ml

for add. accessories p.r.t.p. 60 - 62



# Gas meter



Application:	device	GMH 3691 +Sensor	GOX 100	GOX 100T	GCO 100	AirCheck 100
Measurement of Atmospheric oxygen		✓	✓	✓		
O <sub>2</sub> concentration		✓	✓	✓		
O <sub>2</sub> partial pressure		✓				
CO concentration (carbon monoxide)					✓	
CO <sub>2</sub> (carbon dioxide), temperature, humidity						✓
Protective gases		✓				
Diving		✓		✓	✓	
Exhaust gas monitoring					✓	
Monitoring of ambient air quality						✓

Feature / function:	device	GMH 3691	GOX 100	GOX 100T	GCO 100	AirCheck 100
<b>Specifications</b>						
Measuring ranges		0..100 % O <sub>2</sub> concentration 0..1100 hPa O <sub>2</sub> partial pressure-- -5..50 °C	0..100 % O <sub>2</sub> concentration	0..100 % O <sub>2</sub> concentration	0 ... 1000 ppm CO concentration 0 ... 1250 mg/m <sup>3</sup> 0 ... 60 % COHb	0 ... 2000 ppm CO <sub>2</sub> concentration -10 °C ... 60 °C 5,0 ... 90,0% r.F.
Electrode / sensor		Order sensor separately	Electrochemical oxygen partial pressure sensor in external sensor housing		Sensor internal	Sensor internal
Sensor connection		6-pole mini-DIN socket	0.7 m cable with jack plug		-	-
<b>Function</b>						
General functions		Min/max, hold, auto-off	Min/max, hold, auto-off	Min/max, hold, auto-off, MOD display	Min/max, hold, auto-off	
Interface		✓			✓	
Alarm		✓			✓	✓
Catalog page		p. 42	p. 43	p. 43	p. 41	p. 44

# Compact CO - measuring device

## GCO 100



- 3 display units selectable (ppm, mg/m<sup>3</sup> and % CO Hb)
- Freely adjustable alarm boundaries - integrated acoustic alarm
- Alert at exceeding the maximum concentration at work (MAK/AGW)
- Automatic zero point adjustment
- Max. value memory, hold function
- Interface for RS232- or USB-adapter
- Low power consumption (>1000 hours with normal 9V-battery)
- Battery or power adapter operation, Power-Off-function
- External switching module for 230V/10A (= GAM3000) directly pluggable
- Integrated measuring element - 3 years warranty for the sensor
- Calibration protocol within scope of supply

### GCO 100

#### Specification:

<b>Measuring principle:</b>	electrochemical CO measuring cell		
<b>Measuring range:</b>	0 ... 1000 ppm CO-Concentration		
<b>Display ranges:</b>	0 ... 1000 ppm CO-Concentration 0 ... 1250 mg/m <sup>3</sup> CO-Concentration 0 ... 60.0 % CO Hb (estimation via exhaled breath gas)		
<b>Resolution:</b>	1 ppm, 1 mg/m <sup>3</sup> or 0.1 % CO Hb		
<b>Measuring element:</b>	integrated in device, measuring inlet at front plate, with inner thread for accessories screw in		
<b>Life time:</b>	>5 years at proper usage at air suggested test interval: every 6 months (depending on precision requirements)		
<b>Accuracy:</b>	(at range 0 ... 500 ppm), linearity: < ±5 % of measured value + 1 digit repeatability: < ±5 % of measured value + 1 digit		
<b>Interference:</b>	(extract)		
	Concentration (ppm)	residence time (min.)	display (ppm)
sulphur dioxide	50	600	<1
nitrogen dioxide	50	900	-1
nitric oxide	50	5	8
hydrogen	100	5	20
Carbon dioxide	5000	5	0
<b>Display:</b>	approx. 11 mm high, 4½-digit LC-display		
<b>Pushbuttons:</b>	3 membrane keys		
<b>Nominal temperature:</b>	25 °C		
<b>Ambient condition:</b>	-10 ... +50 °C, 15 ... 90 %RH (non-condensing)		
<b>Storage temperature:</b>	-10 ... +50 °C		
<b>Power supply:</b>	9V-battery, type IEC 6F22 (in scope of supply) as well as additional d.c. connector for external 10.5 - 12V direct voltage supply. (suitable power supply: GNG 10 / 3000)		
<b>Power consumption:</b>	<0.25 mA (>1000 operating hours)		
<b>Housing:</b>	impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip for table top or suspended use.		
<b>Dimensions:</b>	142 x 71 x 26 mm (H x W x D)		
<b>Weight:</b>	approx. 155 g		
<b>Device functions:</b>			
<b>Hold function</b>	by keypress the current measuring will be "frozen"		
<b>Max value memory</b>	the max. measured value will be stored		
<b>Alarming</b>	adjustable alarm rail, value depending alarm sound		
<b>Power-Off-function</b>	device will turn of after the set period off time (1-120 min. or deactiv), when no operating has taken.		

#### General:

Carbon monoxide (CO) is created by the combustion of carbon. Depending on the effectiveness of the combustion (oxygen supply) and the temperature of the combustion more or less CO gas is created. The gas is inflammable and highly toxic. It is invisible, tasteless, scentless and lighter than air.

**Even smallest concentrations are dangerous for humans!**

Therefore a directive exists in Germany, which limits the maximum concentration of CO gas at work (MAK / AGW) to 30 ppm

#### Application areas:

- Control of the air quality (e.g. at work place)
- Checking of heating systems, gas central-heating, fireplace
- Control of the air at maintenance work (tunnel, gas central-heating, ...)
- Detection of CO in the breath of smoker (% CO Hb)
- Cognition of CO poisoning i.e. at burnings (fire fighters, ...)

#### Price, accessories:

**ESA 100** tube-adapter/flow diverter to screw in front plates.

**ZOT 369** T-piece

**GRV 100** non return valve

**MSK 100** mouth piece of plastic

**GAS 100** extension set for inhaled air control (consisting of ESA100, ZOT369, GRV 100 and 5x MSK100)

**GZ-10** test gas cap GCO (for controlled flow with test gas)

**GZ-02** gas bottle with 12l test gas: 30 ppm CO

**GZ-03** gas bottle with 12l test gas: 300 ppm CO

**GZ-04** gas valve unit MiniFlo for gas bottles with 12l


**GB 9 V** spare battery 9V / approx. 300mA/h, type IEC 6F22

**GLI 9 V** lithium battery 9V / approx. 1200mA/h

**GKK 3000** case (275 x 229 x 83 mm) with punched lining

**USB 3100 N** interface converter to USB, elec. isolated

**GAM 3000** switching module for 230V<sub>AC</sub>/10A



for additional accessories please refer to page 60 - 61

## Residual oxygen meas. device

for quick and cost-effective measurement of residual oxygen



### GMH 3691 GOG - H

Universal use

### GMH 3691 GOG - L NEW

low oxygen-concentrations  
fast response time

#### Application:

If delicate products are conserved at low-oxygen atmospheres (protective gas), these measuring devices will provide a vital check of the residual oxygen content.

- packaging industry
- food industry

#### Specification: (summary)

##### Sensor elements:

- H: GOEL 370      - L: GOEL 380

Measuring range (hPa O<sub>2</sub>):

- H: 0 ... 1100      - L: 0 ... 300

Measuring range (% O<sub>2</sub>):

- H: 0.0 ... 100.0      - L: 0.0 ... 25.0

##### Response time T<sub>90</sub>:

- H: < 10 s      - L: < 5 s

**Accuracy:** (whole system - if careful calibration and measuring)

1-point-calibration:  $\pm 0.2\% \text{O}_2 \pm 1$  digit

(for concentrations < 10%)

2-point-calibration:  $\pm 0.1\% \text{O}_2 \pm 1$  digit

(for concentrations < 10%)

**Oxygen sensor:** Oxygen partial pressure sensor, built in external sensor housing

**Operation life:** 12 month warranty for sensor element (if appropriate application and ambient pressure)

**Working pressure:** 0.5 ... 2.0 bar abs.

**Over- / under- pressure:** max. 0.25 bar (pressure difference)

**Power supply:** 9V battery, type IEC 6F22

**Dimensions case:** approx. 394 x 294 x 106 mm

**Weight:** approx. 1400g (cpl. set)

for additional technical data refer to GMH3691 and corresponding sensors p. 43

#### Scope of supply:

Device GMH3691, hand pump with air tube, GOG oxygen sensor with penetration needle, case GKK3500, spare needle  $\varnothing$  0.9mm, rubber foam sticker (40 pieces), operating manual.

#### Spare elements, accessories:

**GOG-SET** Set without instrument

**Scope of supply:** GOG oxygen sensor with penetration needle, hand pump with air tube, case GKK3500, spare needle and 40 rubber foam stickers

**GOEL 370** spare sensor element

**GOEL 380** spare sensor element

**GOG-N** needle,  $\varnothing$  0.9mm (5 pieces)

**GOG-A** rubber foam sticker (40 pieces)

## Air oxygen measuring device



- Double display for oxygen and temperature
- Measured units: O<sub>2</sub>-concentration and O<sub>2</sub>-partial pressure
- Alarm detector with integrated horn
- Automatic temperature compensation
- Min./Max. value memory, Hold function
- Serial interface, device can be connected to bus system (up to 5 devices can be connected to one PC interface)
- Battery and d.c. operation
- Wide range of application
- Most simple calibration in atmospheric air

**GMH 3691** Sensor not included - please order separately!

#### Specification:

##### Measuring ranges:

**Oxygen concentration:** 0,0 ... 100,0 % O<sub>2</sub> (gaseous)

**Partial oxygen pressure:** 0 ... 1100 hPa O<sub>2</sub>

**Temperature:** -5,0 ... 50,0 °C

**Accuracy:** (device) (at nominal temperature = 25°C)

**Oxygen concentration:**  $\pm 0.1\% \pm 1$  digit

**Partial oxygen pressure:**  $\pm 1$  hPa  $\pm 1$  digit

**Temperature:**  $\pm 0.1^\circ\text{C} \pm 1$  digit

**Oxygen electrode:** for suitable sensors p.r.t. page 43

**Sensor connection:** 6-pin screened Mini-DIN-socket.

**Display:** two 4 digit LCDs (12.4mm or 7mm high), as well as additional arrows.

**Pushbuttons:** 6 membrane keys for ON/OFF-switch, selection of meas. range, min- and max-value memory, hold-function, calibration etc.

**Working temperature:** 0 to +50°C

**Relative humidity:** 0 to +95%RH (non-condensing)

**Storage temperature:** -20 to +70°C

**Interface:** serial interface, direct connection to RS232 or USB interface of a PC via electrically isolated interface converter GRS 3100 or GRS 3105 resp. USB 3100 N (p.r.t. accessories).

**Power supply:** 9V-battery, type IEC 6F22 (included), as well as additional d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)

**Power-Off-function:** 1...120min (can also be deactivated).

**Power consumption:** approx. 1,5 mA

**Low battery warning:**  $\Delta$  and 'bAt'

**Dimensions:** 142 x 71 x 26 mm (H x W x D)  
Impact-resistant ABS plastic housing, membrane keyboard, transparent panel. Front side IP65, integrated pop-up clip.

**Weight:** approx. 160 g (cpl. with battery)

##### Functions:

**Min-/Max-value memory:** max. and min. values will be memorized.

**Hold function:** by pressing a button the current meas. value will be memorized.

**Alarm:** integrated limit detector for min. or max. alarm.

**Temperature compensation:** automatic via temperature sensor, integrated in probe housing.

**Air pressure compensation:** The O<sub>2</sub> concentration will be compensated according to the abs. atmospheric pressure set (500...2000hPa).

**Calibration:** 1-point calibration: extremely simple quick calibration in atmospheric air. (press button to compensate unit to 20.9%).

2-point calibration: first point at atmospheric air (20.9%), second point freely selectable

#### Application:

Wide range of application for your home, job and hobby! For example:

- **Bio chemistry:** Oxygen monitoring in breeding chambers for cell cultures. Monitoring of fermentation process of fruits in fermentation plants etc.

- **Medicine:** Monitoring of oxygen concentration in respirators; checking of breathing, monitoring of oxygen concentration in incubators, oxygen tents etc.

- **Food technology:** Monitoring of residual oxygen in packages (e.g. coffee, tea, etc.). Monitoring of oxygen content during production processes.

- **Air conditioning and ventilation technology:** Oxygen measurements, air quality monitoring, measuring of oxygen concentration in enclosed air conditioning systems, etc.

- **Sport:** Checking of oxygen content in compressed air breathing apparatuses (diving, etc.), oxygen monitoring for gliding.

**The device can only be used to check during these applications. -> no substitute for approved monitoring device!**

#### Accessories:

**Suitable sensors** p.r.t. page 43

**GKK 3000** case (275 x 229 x 83 mm) with punched lining suitable for GMH3xxx

**USB 3100 N** interface converter, electrical isolated

**GRS 3105** interface converter with 5 connection points, electr. isolated, for the connection of 5 GMH3xxx to one PC (RS232).

**ST-R1** device protection bag with cut-out for probe connection

for add. accessories p.r.t. pages 60 - 62

# Atmospheric oxygen sensors for devices of the GMH369x series

## closed sensor type



- suitable for under and over pressure
- for using in gas-tight systems

### Application:

Suitable for measuring in normal atmosphere and in systems without or with slight under or over pressure. The sensor type features a screw thread and can be built in gas-tight in almost every system directly resp. with tube-adaptor.

## GGO 370

universal applications, diving,

## GGO 380

**NEW**

for low oxygen-concentration,  
fast response time

### Specification:

Specific features:

### Measuring range:

**Partial oxygen pressure:** 0 ... 1100 hPa O<sub>2</sub>  
**Oxygen concentration:** 0,0 ... 100,0 % O<sub>2</sub>

**Response time:** T<sub>90</sub> <10 s.

**Operating conditions:**

### GGO/GOO 370

Stronger membrane,  
coated electronics,  
temperature compensation

### GGO/GOO 380

for low oxygen/concentration,  
fast response time

0 - 45 °C

0 - 95 %RH (non-condensing)

0 - 50 °C

0 - 95 %RH (non-condensing)

**Ambient pressure:**

0,5 to 2,0 bar abs.

**Over-/under-pressure:**

max. 0,25 bar  
(pressure difference sensor membrane to ambient – sensor screwed-in)

**Storage temperature:**

-15 to +60 °C

**Operation life:**

approx. two years (warranty for sensor element: 12 months)

**Sensor:**

**GOEL 370**

**GOEL 380**

Oxygen-partial pressure probe, mounted in external sensor housing  
replaceable (temperature sensor mounted in housing)

**Connection:**

approx. 1,3 m cable with Mini-DIN-plug.

**Dimensions of housing:**

GGO...: approx. Ø 36 mm x 95 mm (150 mm incl. anti-buckli. glanding),  
GOO...: approx. Ø 40 mm x 105 mm (160 mm incl. anti-buckl. glanding)  
Housing with M16 x 1-screw thread (sensor can be connected to line  
tubes by means of an additional adapter)

**Weight:**

approx. 135 g (GGO...) or approx. 145 g (GOO...)

**Scope of supply:**

GGO... : sensor, flow diverter, T-piece  
GOO... : sensor, flow diverter

### Options: (for all types)

cable length 4m

cable length 10m

### Spare elements, accessories:

**GOEL 370** spare sensor element for replacement by user,  
suitable for universal applications, diving

**GOEL 380** spare sensor element for replacement by user,  
suitable for low oxygen concentrations

**GZ-11** flow rate adapter

to measure the oxygen concentration with 6/4 mm tube

**ESA 369** spare tube-adaptor M16x1, for tubes with a inner-diameter of 15mm



## Compact air oxygen meas. device



## GOX 100

for universal applications

- 1-Button Calibration
- Automatic Power-Off
- Min-/max- value memory
- Incl. sensor GOEL 370

## GOX 100T

for diving applications

- 1-Button Calibration
- MOD-Display (Maximum Operating Depth)
- HOLD function
- Incl. sensor GOEL 370

### Specification:

**Meas. range:** 0,0 ... 100,0 % O<sub>2</sub>

**Accuracy typ.:** ± 0,1 % O<sub>2</sub> ± 1 digit

calibrated device (range from 15 to 40 % O<sub>2</sub>)

**MOD (GOX 100T):** 0 ... 100 m / 0 ... 199 ft

**Sensor Connection:** jack-connector cable

**Sensor:** Oxygen-partial pressure probe,  
mounted in external sensor housing

**Warranty:** 12 months

**Working pressure:** 0,5 to 2,0 bar absolute

**Over-/under-pressure:** max. 0,25 bar

**Working temperature:** 0 to 45°C (sensor)  
-20 to 50°C (device)

**Relative humidity:** 0 to +95%RH

**Power supply:** 9V battery type IEC 6F22

**Power consumption:** approx. 120µA (over 2500 h)

**Display:** 3½-digit, 13mm high LCD-display

**Housing:** ABS-enclosure, front side IP65

**Dimensions:** approx. 106 x 67 x 30 mm

**Weight:** approx. 185g

**Features:** **BAT, Auto-Power-Off**

### Scope of supply:

Device incl. sensor, T-piece, flow diverter

### Options:

- **LACK** encapsulated PC board  
(for applications where condensation is possible)

### Spare peaces, accessories:

**GOEL 370** spare sensor

**GOEL 380** spare sensor

**ESA 369** spare tube-adaptor

**ZOT 369** spare T-piece

for add. accessories p.r.t. page 60 - 62

## Indoor climate monitoring CO2 monitoring



**NEW**

- large CO2 displaying
- high long-term stability
- air quality rating GOOD / NORMAL / POOR
- humidity / temperature display, real-time clock, calendar
- alarm function

### AirCheck 100

The indoor climate should be monitored to avoid exhaustion, lacking concentration and sickness (sick-building-syndrome) due to poor air quality.

The AirCheck 100 is a universal device for fast and continuous monitoring of the indoor climate. The air quality is rated according to its CO<sub>2</sub> content measured with the internal long-term stable and maintenance-free infrared sensor (NDIR). After turning-on the AirCheck 100 automatically executes an offset calibration but a manual calibration is possible, too.

The CO<sub>2</sub> content is shown on the large and well readable display together with a 3-stage rating of the ambient air (good, normal, poor). The AirCheck can be configured to optically as well as acoustically (80dB) remind to ventilate on time by 2 adjustable alarm boundaries. Temperature and air humidity measurement, real-time clock and calendar complete the device's features.

#### Application:

- training, conference and break rooms
- housing rooms
- offices, laboratories
- public buildings, schools
- etc.

#### Specification:

##### Measuring range:

**CO<sub>2</sub>:** 0 ... 2000 ppm  
**Temperature:** -10 °C ... +60 °C  
**Humidity:** 5,0 ... +90,0 % r.F.

##### Resolution:

**CO<sub>2</sub>:** 1 ppm  
**Temperature:** 0,1 °C / 0,1 °F  
**Humidity:** 0,1 % r.F.

##### Accuracy:

**CO<sub>2</sub>:** 50 ppm ± 5% of meas. value  
**Temperature:** ± 0,6 °C  
**Humidity:** ± 5 % r.F. (@25 °C, 10-90 % r.F.)  
 ± 7 % r.F. (@25 °C, <10 % r.F., > 90 % r.F.)

##### Response time (T<sub>90</sub>):

**CO<sub>2</sub>:** < 2 min  
**Temperature:** < 2 min  
**Humidity:** < 10 min

##### Measuring principle:

**Quality rating:** Good: < 700 ppm (adjustable)  
 Normal: 700 ... 1000 ppm (adjustable)  
 Poor: > „Normal“

##### Alarm:

> 1000 ppm (adjustable)  
 acoustically: buzzer, 80 dB  
 visually: ventilator symbol displayed

##### Working conditions:

-10 ... +50 °C,  
 5 ... 80 % r.F. (avoid condensation)

##### Storage conditions:

-20 ... +60 °C, 5 ... 90 % r.F. (avoid condensation)

##### Display:

simultaneous display of CO<sub>2</sub>, temperature, humidity, clock, date

##### Power supply unit:

IN: 100-240VAC, OUT: 5VDC / 0,6A

##### Dimensions:

120 mm x 85 mm (diameter x depth)

##### Scope of supply:

1 device, 1 power supply unit, 1 operation manual

# Pressure handheld instruments



Application:	Device	GMH 5130	GMH 5150	GMH 5155	GMH 3111	GMH 3151	GMH 3156	GMH 3161-12	GMH 3181-12	GMH 3161-01	GMH 3161-07...	GMH 3161-13	GMH 3181-01	GMH 3181-07	GMH 3181-13	GDH 200-07	GDH 200-13	GDH 200-14	GPB 3300	GTD 1100	GDH xx AN	GDH 12 AN	GDUSB 1000	
Relative pressure meas. (over, under- and pressure difference)		✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓						✓		✓
Absolute pressure meas.		✓	✓	✓	✓	✓	✓	✓	✓										✓	✓	✓		✓	✓
Heating, ventilation, climate		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓			✓
Meas. in liquids		✓	✓	✓	✓	✓	✓																	✓
Vacuum meas.		✓	✓	✓	✓	✓	✓	✓	✓										✓				✓	✓
Meteorology								✓	✓										✓		✓		✓	
Altitude measuring (sports)																					✓			
Water-proof application		✓	✓	✓																				
Optionally EX-protection					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓									

Function / Equipment:	Device	GMH 5130	GMH 5150	GMH 5155	GMH 3111	GMH 3151	GMH 3156	GMH 3161-12	GMH 3181-12	GMH 3161-01	GMH 3161-07...	GMH 3161-13	GMH 3181-01	GMH 3181-07	GMH 3181-13	GDH 200-07	GDH 200-13	GDH 200-14	GPB 3300	GTD 1100	GDH xx AN	GDH 12 AN	GDUSB 1000			
<b>Technische Daten</b>																										
Plug-in probe		1	1	2	1	1	2																			
Meas. range pressure (max.) [mbar]		depends on sensor		depends on sensor		0..1300		...01: -1..25 ...07: -10..350 ...13: -100..2000		...07: 0..200 ...13: 0..2000		0..11000		300..1100		GTD 1100: -10..+50 °C -500..+9000 m		..01: 0..20 ..07: 0..200 ..12: 0..1300 ..13: 0..2000 ..14: 0..11000		depends on sensor						
Additional measurands																										
Units		mbar, bar, Pa, kPa, MPa, mmHg, PSI, mH <sub>2</sub> O															mbar (hPa), mmHg, PSI ...07: zus. Pa		mbar (hPa), mmHg, PSI		mbar (hPa), mmHg		mbar (hPa)		depends on sensor	
<b>Functions:</b>																										
Min/Max, Zero, Auto-Off		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Min/Max, Zero		
Alarm		✓	✓		✓	✓		✓					✓	✓	✓											
Data logger		✓	✓		✓	✓		✓					✓	✓	✓											
Data logger		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓											
Analog output		✓	✓		✓	✓		✓					✓	✓	✓							✓	✓			
Catalog page		p. 46-47			p. 48-49			p. 52		p. 53			p. 53			p. 54		p. 54		p. 55		p. 56		p. 57		

Handheld instrument

Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

# Water-proof handheld device for pressure measurement with external changeable probes

## Features

- Water-proof (device and plug-in connections)
- Serial interface and analog output
- Data logger and alarm function
- Peak value detection (1000 measurements / s)
- Leakage test
- Robust silicone protection cover
- Large double display
- Background illumination
- Incl. calibration protocol

## Application

Mobile use for:




- industry and craft
- HVAC: heating, ventilation, air-conditioning
- leakage test / pressure test
- chimney draft measurement: under pressure
- leakage test at buildings (i.e. 4 Pascal test)
- measurements of gas and oil firings
- automobile trade



**GMH 5130** with 1 sensor connections, without sensor

**GMH 5150** with 1 sensor connections, analog output and data logger, without sensor

**GMH 5155** with 2 sensor connections, analog output and data logger, without sensors

Specification	GMH 5130	GMH 5150	GMH 5155
<b>Sensor connections:</b>	1	1	2
<b>Connections:</b>			
Sensor	1x 7-pole bayonet connector	1x 7-pole bayonet connector	2x 7-pole bayonet connector
Output / ext. supply	4-pole bayonet connector for serial interface and supply (with accessories: USB adapter USB 5100)	analog output 0 ... 1 V	analog output 0 ... 1 V
	--		
			
<b>Suitable probes:</b>	GMSD / MSD sensors, available ranges (resolutions): from -1.999 ... 2.500 mbar / (0.001 mbar) till 0 ... 1000 bar (1 bar)		
<b>display range max.:</b>	-19999 ... +19999 digit		
<b>Display unit:</b>	depends on measuring range selection and sensor: mbar, bar, Pa, kPa, MPa, mmHg, inHg, PSI, mH <sub>2</sub> O		
<b>Measuring frequency:</b>	4 measurements / s or 1000 measurements / s		
<b>Accuracy:</b>	± 0.1 % FS ± 1 digit		
<b>Display:</b>	4 ½ digit 7-segment, illuminated (white)		
<b>Adjustment:</b>	offset / slope via menu		
<b>Housing:</b>			
Protection class:	IP65 / IP67		
Dimensions:	160 x 86 x 37 mm (H x W x D) incl. silicone protection cover (red)		
Weight:	ca. 250 g incl. battery and protection cover		
<b>Power supply:</b>	2x AAA battery (included), battery life 500 h (without illumination), 4 measurings / s		

# Handheld device for pressure measurement

**GMH 5130** with 1 sensor connections, without sensor

**NEW**

**GMH 5150** with 1 sensor connections, analog output and data logger, without sensor

**GMH 5155** with 2 sensor connections, analog output and data logger, without sensors

Functions	GMH 5130	GMH 5150	GMH 5155
Min / max value memory	x	x	x
Hold	x	x	x
Auto power off	x	x	x
Low battery display "BAT"	x	x	x
Display of condition of battery	x	x	x
Background lightning	x	x	x
Period selectable (on/off or 5 s ... 2 min)			
User-defined unit	conversion to arbitrary unit by linear factor		
Average filter	adjustable: 1 ... 120 s	adjustable: 1 ... 120 s	adjustable: 1 ... 120 s
Leakage test function	-	leak rate display, leak rate alarm (/s, /min, /h)	
Air velocity / flow volume	-	Pitot tube measurement (accessories)	
Analog output	-	0 - 1 V, freely adjustable, connection with 4-pole bayonet connector, Resolution 12 bit	
Data logger	-	cyclic: 10.000 data sets	cyclic: 8.000 data sets
		Single value: 1.000 data sets (with measuring point input, 40 adjustable measuring point texts or measuring point numbers)	
Min-/max- alarm	-		3 channels (sensor 1, sensor 2, difference) with individual alarm boundaries
		Permanent monitoring of alarm boundaries 3 alarm conditions - off: Alarm function inactive - on: Alarm report via display, integrated buzzer and interface - no Sound: Alarm report only via display and interface	



## General function description

**Min / Max Value Memory:** highest and lowest measured value is saved

**Auto Power Off:** device is automatically switched off after a selected period if unused (0 to 120 min, or deactivated)

**Additional Display for pH-Electrode and Battery:** Bar graph display

**Low Battery Display "BAT"**

**Note to pressure unit selection:**

A pressure unit can be selected only if the whole measuring range of this unit can also be displayed and the sensor supports the corresponding resolution.

## Accessories



**GMSD ... K51** pressure sensors (p.r.t. page 50)

Application field: non-aggressive gases for over / under pressure and difference pressure measurements or absolute pressure measurements



**MSD** pressure sensors / stainless steel (p.r.t. page 51)

Application field: air, aggressive gases for over / under pressure and difference pressure measurements or absolute pressure measurements

**MSD-K51** 1 m connection cable for MSD sensors

**EBS 20M** software for long-term monitoring (p.r.t. page 62)

**GSOFT 3050** (p.r.t. page 62)

Software for operation of logger devices

**USB 5100**

Electrically isolated interface converter, supplied via USB

**Prandtl-Staurohr** (made of stainless steel)

for air velocity / flow volume measurement  
Ø = 3 mm, NL = 300 mm, max. 600 °C

**GKK 3500**

Device case with eggcrate foam and cut-outs for 1 device  
(394 x 294 x 106 mm)



# Hand-held pressure measuring device

## GMH 3111


- ▶ **one** device for any measuring range (2.5 mbar ... 1000 bar)
- ▶ **calibrated and fully interchangeable pressure probes**
- ▶ **tara, hold function, min-/max-value memory, ready for bus operation**



Probes for following pressure ranges are available:

- relative pressure 2,50 mbar ... 1000 bar rel.
- pressure difference 0,00 bar ... 10,00 bar
- absolute pressure 0,00 bar ... 35,00 bar
- special measuring ranges upon request

**GMH 3111** (probes not included)

**GMH 3111 - ex** ( device without probe)

*suitable  
pressure probes  
page 42 / 43*

Specification:	GMH 3111	GMH 3111-ex
<b>max. display range:</b>	-19999 ... +9999 Digit	-19999 ... +19999 Digit
<b>Measuring range:</b>	corresponding to used probe	
<b>Overload:</b>	corresponding to used probe	
<b>Resolution:</b>	corresponding to used probe	
<b>Accuracy: (device)</b>	±0,1%FS ±1Digit (at nominal temperature = 25°C)	
<b>Pressure units:</b>	mbar, bar, Pa, kPa, MPa, mmHg, PSI, mH <sub>2</sub> O, can be selected.	
<b>Probe connection:</b>	1 sensor socket	1 sensor socket <i>6-pin screened lockable Mini-DIN-socket(s) for GMSD/MSD-sensors. Automatic probe detection and setting of meas. range upon plugging in of probe.</i>
<b>Display:</b>	2 x 4½-digit LCD	2 x 4½-digit LCD
<b>Output:</b>	serial interface	serial interface
<b>- serial interface:</b>	direct connection to RS232 or USB interface of a PC via interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories).	
<b>- analog output:</b>	--	--
<b>Power supply:</b>	9V-battery, d.c. connector	9V-battery, d.c. connector <i>suitable 9V-battery (type IEC 6F22) in scope of supply, d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)</i>
<b>Sensor adjustment:</b>	digital offset and scale input	digital offset and scale input
<b>Tare, hold, min/max value:</b>	<b>X</b>	<b>X</b>
<b>Peak value memory:</b>	--	--
<b>Measuring cycle:</b>	4 measurements / s	4 measurements / s
<b>Logger functions:</b>	--	--
<b>Averaging function:</b>	--	--
<b>Min-/max-alarm:</b>	--	--
<b>Power consumption:</b>	approx. 1,6 mA	max. 1,6 mA
<b>Working condition:</b>	-25 ... 50°C, 0 ... 95%RH	-10 ... 50°C, 0 ... 95%RH
<b>Power-Off-function:</b>	1...120 min (can also be deactivated).	
<b>Housing dimensions:</b>	142 x 71 x 26 mm, impact-resistant ABS plastic housing, Front side IP65 integrated pop-up clip for table top or suspended use.	Front side IP65
<b>Weight:</b>	approx. 150 g	approx. 190 g (incl. case)

### Note to Ex- design types:

*Technical changes compared to standard instrument (valid for all GMH31xx - ex)*

**Ex qualification:**  II 2 G Ex ib IIC T4

**Ref. document:** EPS 09 ATEX 1 227 X

**Standards:** The device meets the standards for electric resources in explosion endangered areas according to EN 60079-0 : 2006, EN 60079-11 : 2007

**Probe:** (GMH 3111 - ex, GMH 3151 - ex, GMH 3156 - ex)  
All GMSD sensors with option 'Ex type' can be used.

**Interface:** suitable interface adapter are USB 3100 N, GRS3100 and GRS3105

*Please note:* the operation of the interface is not allowed within the Ex area!

**Working temperature:** -10 to +50°C

**Power supply:** 9V-battery, d.c. connector

*Please note:* the use of d.c. connector is not allowed within the Ex area! Just d.c. connectors of type GNG10/3000 can be used.

**Alarm function:** (GMH 3151 - ex, GMH 3156 - ex, GMH 3181 - ex)  
The device is without a horn, in the alarm settings are only the parameter "no.so" and "off" adjustable.

**Scope of supply:** device with associated leather case.

### Note to the pressure unit selection:

(information for all GMH31xx)

The choice of a specific pressure unit is possible, if its whole measuring range is displayable within the display of the device and the sensor is support these resolution.

# Pressure measuring device with logger

## GMH 3151



### Special features:

- 4½-digit display  
probes with higher resolution up on request
- logger functions
- peak value memory
- analog output 0-1V
- 1000 measurements / second
- digital sensor adjustment possible
- min- / max-alarm
- integrated horn

### Additional function of the GMH3156:


- 2 GMSD/MSD-probes connectable
- difference measurement of two probes

## GMH 3156



**GMH 3151** (probe not included)

**GMH 3156** (probes not included)

**GMH 3150 - ex**  device without probe)

**GMH 3156 - ex**  device without probes)

*suitable  
pressure probes  
page 50 / 51*

Specification:	GMH3151	GMH3156	GMH3151-ex	GMH3156-ex
<b>max. display range:</b>	-19999 ... +9999 digit		-19999 ... +19999 digit	
<b>Measuring range:</b>	corresponding to used probe		corresponding to used probe	
<b>Overload:</b>	corresponding to used probe		corresponding to used probe	
<b>Resolution:</b>	corresponding to used probe		corresponding to used probe	
<b>Accuracy: (device)</b>	±0,1%FS ±1Digit (at nominal temperature = 25°C)			
<b>Pressure units:</b>	mbar, bar, Pa, kPa, MPa, mmHg, PSI, mH <sub>2</sub> O, can be selected.			
<b>Probe connection:</b>	<b>1</b>	<b>2</b>	<b>1</b>	<b>2</b>
	6-pin screened lockable Mini-DIN-socket(s) for GMSD/MSD-sensors. Automatic probe detection and setting of meas. range upon plugging in of probe.			
<b>Display:</b>	2 x 4½-digit LCD		2 x 4½-digit LCD	
<b>Output:</b>	serial interface o. AAG		serial interface o. AAG*	
<b>- serial interface:</b>	direct connection to RS232 or USB interface of a PC via interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories)		direct connection to RS232 or USB interface of a PC via interface converter GRS 3100, GRS 3105 or USB 3100 N (accessories)	
<b>- analog output:</b>	0-1V, freely adjustable (res. 12bit)		0-1V, freely adjustable (res. 12bit)	
<b>Power supply:</b>	9V-battery, d.c. connector suitable 9V-battery (type IEC 6F22) in scope of supply, d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)		9V-battery, d.c. connector*	
<b>Sensor adjustment:</b>	digital offset and scale input		digital offset and scale input	
<b>Tare, hold, min/max value:</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Peak value memory:</b>	≥1 ms		≥1 ms	
<b>Measuring cycle: "slow"</b>	4 measurements / s		4 measurements / s	
<b>"fast" (with filter)</b>	≥ 1000 meas. / s		1000 meas. / s	
<b>"peak-detect"</b>	≥ 1000 meas. / s		1000 meas. / s	
<b>Logger functions:</b>				
<b>manually data sets:</b>	99		99	
<b>-cycle data sets:</b>	<b>10000</b>	<b>4000</b>	<b>10000</b>	<b>4000</b>
	(max. 64 recording sequences)		(max. 64 recording sequences)	
<b>-adjustable cycle time:</b>	1 ... 3600 seconds		1 ... 3600 seconds	
<b>Averaging function:</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Min-/max- alarm:</b>	<b>X</b>	<b>X</b>	<b>X*</b>	<b>X*</b>
<b>Real-time clock:</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Power consumption:</b>	max. 1.6mA (4 measurements / s) max. 7mA (1000 measurements / s)		max. 1.6mA (4 measurements / s) max. 7mA (1000 measurements / s)	
<b>Working condition:</b>	<b>-25 to +50°C, 0 to +95%r.F.</b> (non-condensing)		<b>-10 ... 50°C, 0 ... 95 %RH</b> (non-condensing)	
<b>Power-Off-function:</b>	1...120 min (can also be deactivated).			
<b>Housing dimensions:</b>	142 x 71 x 26 mm, impact-resistant ABS plastic housing. Front side IP65			
<b>--</b>	pop-up clip for table top or suspended use.			
<b>Weight:</b>	approx. 150 g		approx. 190 g (incl. case)	

\* refer to note to EX-design types at page 48

### General functional description:

- Tare function:** display value and the min./max values memorized can be set to zero.
- Hold function:** by pressing a button the current meas. value will be memorized.
- Min./Max. value memory:** memorizing of max. and min. values.
- Peak value memory (peak-detect):** In the min-/max-value memory will be detected not filtered pressure peaks ≥1msec.
- Averaging function:** integrates the meas. values during a selectable period of time and then calculates the average display value.
- Logger operation:** Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT3050) available as additional equipment.
- Low power logger mode:** (only in meas. cycle "slow") Only one measurement carried out at the end of the respective logger cycle. The battery life is considerably prolonged. For long-term recordings (eg. tightness).
- Min-/Max-alarm:** the measuring value is constantly monitored if they remain within the min./max. limits set (deaktivatable)
- Alarm:** 3 different alarm settings
- "off" - alarm function deactivated
  - "on" - visual alarm via display, interface alarm, alarm sounded via integrated horn.
  - "no.So." - visual alarm via display and interface alarm
- Controlling function:** with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm memoried (see accessories)
- SeaLevel-correction:** when connecting an abs. pressure probe the barom. air press. can also be displayed corrected to sea level "zero". (Air pressure comp. achieved by entering the meters above sea level "zero")



## Pressure sensors:

for use with GMH31xx, GDUSB (Type GMSD ...), GMH 51xx (Type: GMSD ... - K51)

- Application:
- air and non aggressive gases
  - sensor are not suitable for water / liquids

### Relative pressure sensors: for measuring of over / under pressure and pressure difference

	GMSD 2,5 MR ..	GMSD 25 MR ..	GMSD 350 MR ..	GMSD 2 BR ..	GMSD 10 BR ..
Measuring range	-1,999...+2,500 mbar	-19,99...+25,00 mbar	-199,9...+350,0 mbar	-1000...+2000 mbar	-1.00... 10.00 bar
Overload	max. 200 mbar	max. 300 mbar	max. 1 bar	max. 4 bar	max. 10.34 bar
Resolution	0,001 mbar (0,1 Pa)	0,01 mbar (1 Pa)	0,1 mbar	1 mbar	10 mbar
Accuracy (typ.)					
hysteresis and linearity	± 0,2 % FS	± 0,2 % FS	± 0,2 % FS	± 0,2 % FS	± 0,2 % FS
temperature influence from 0-50°C	± 1,0 % FS	± 0,5 % FS	± 0,4 % FS	± 0,4 % FS	± 0,4 % FS

GMSD ...					
GMSD ... - K51					

### Absolute pressure sensors: for measuring of absolute pressure

	GMSD 1,3 BA ..	GMSD 2 BA ..	GMSD 7 BA ..
Measuring range	0 ... 1300 mbar abs.	0 ... 2000 mbar abs.	0.00 ... 7,00 bar abs.
Overload	max. 4 bar abs.	max. 4 bar abs.	max. 10,34 bar abs.
Resolution	1 mbar	1 mbar	10 mbar
Accuracy (typ.)			
hysteresis and linearity	± 0,2 % FS	± 0,2 % FS	± 0,2 % FS
temperature influence from 0-50°C	± 0,4 % FS	± 0,4 % FS	± 0,4 % FS

GMSD ...			
GMSD ... - K51 *			

## General Specification:

- Sensor:** piezoresistive pressure sensor
- Pressure connection:** 2 connection pins for tubes 6 x 1 mm (6mm inside-Ø and 4mm outside-Ø)
- Electronics:** PC board with amplifier and data memory for sensor data (measuring. range/calibration etc.) integrated in sensor housing.
- Working temperature:** 0 ... +70 °C
- Relative humidity:** 0 ... +95 % r.F. (nicht betauend)
- Storage temperature:** -40 ... +85 °C
- Housing:** ABS plastic with suspension eye, dimensions do not incl. conn. pin: 68 x 32,5 x 15 mm, dimensions with connection pin: 68 x 32,5 x 27,5 mm.
- Weight:** approx. 75 g (...K51: approx. 82 g)

### Device connection:

- GMSD ... :** 1m PVC connection cable, screened with integral 6-pin Mini-DIN-plug, lockable
- GMSD ... - K51:** 1m PVC connection cable, screened with 7-pin bayonet plug

## Options, upcharges:



### Probes for Ex-protection

**Higher probe accuracy** by multi point calibration  
Additional individual linearisation points are stored in sensor memory.  
(not possible for GMSD 2,5 MR and GMSD 25 MR !)

### Certificate of calibration WPD5


## TUBE, TUBE CLIPS, ADAPTER, COUPLINGS, etc.

for GMH31xx, GMSD, GDH and pressure measuring transducers.

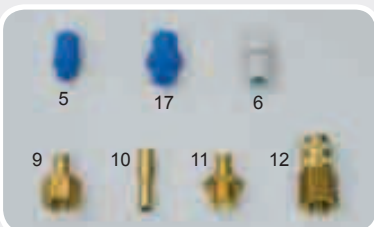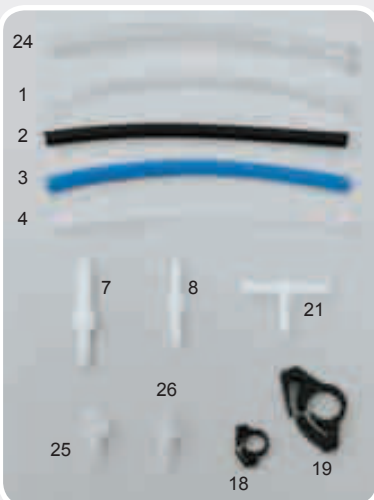

- GDZ-01** = PVC-tube 6/4 (6 mm outside-Ø, 4 mm inside-Ø) ( 5 bar @ 23°C)
- GDZ-24** = PVC-tube 10/7 (10 mm outside-Ø, 7 mm inside-Ø) ( 5 bar @ 23°C)
- GDZ-02** = PE (polyethylene) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (10 bar @ 23°C)
- GDZ-03** = PUR (polyurethane) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) ( 9 bar @ 23°C)
- GDZ-04** = PA (polyamide) 6/4 (6 mm outside-Ø, 4 mm inside-Ø) (25 bar @ 23°C)
- GDZ-05** = Screw-type glanding for 6/4 tube with outside thread G<sup>1</sup>/<sub>8</sub>"
- GDZ-06** = Increaser glanding for 6/4 tube with inside thread G<sup>1</sup>/<sub>8</sub>"
- GDZ-07** = Double reducer for tubes with 6 inside-Ø to 6/4 tube
- GDZ-08** = Double adapter for 6/4 tube to 6/4 tube
- GDZ-09** = Coupling adapter (NW5) made of brass with inside thread G<sup>1</sup>/<sub>4</sub>" (suitable for GDZ-12)
- GDZ-10** = Coupling adapter (NW5) made of brass for tube with 6mm inside-Ø (suitable for GDZ-12)
- GDZ-11** = Coupling adapter (NW5) made of brass with outside thread G<sup>1</sup>/<sub>4</sub>" (suitable for GDZ-12)
- GDZ-12** = Coupler socket (NW5) made of brass (single-hand use) with inside thread G<sup>1</sup>/<sub>4</sub>"
- GDZ-17** = Screw-in connection for 6/4 tube with outside thread G<sup>1</sup>/<sub>4</sub>"
- GDZ-18** = Tube clamp for 6/4 tube
- GDZ-19** = Tube clamp for 8/6 tube (8mm outside-Ø and 6mm inside-Ø)
- GDZ-21** = T-piece for 6/4 tubes
- GDZ-25** = Luer-Lock male to 6/4 tube
- GDZ-26** = Luer-Lock female to 6/4 tube
- GDZ-29** = Filter-Membrane incl. Luer-Locks (GDZ-25 and GDZ-26) (without picture)
- GOG-N** = needle, Ø 0.9 mm - suitable to Luer-Lock male (5 pieces) (without picture)

for additional accessories refer to page 51

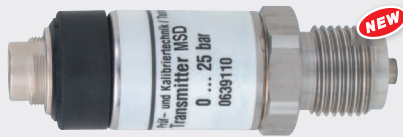

## Stainless steel pressure sensors:

for use with GMH31xx, GMH 51xx and GDUSB 1000 (p.r.t. page 57)

Application: • air, aggressive gases  
• aggressive liquids / water, etc.

Follow-on type for **GMSD-**  
stainless-steel-sensors

Absolute pressure	Measuring range	Overload	Resolution				
<b>MSD 1 BAE</b>	0 ... 1000 mbar abs.	max. 5 bar abs.	1 mbar	<b>MSD 1 BRE</b>	0 ... 1000 mbar rel.	max. 5 bar rel.	1 mbar
<b>MSD 2,5 BAE</b>	0 ... 2500 mbar abs.	max. 10 bar abs.	1 mbar	<b>MSD 2,5 BRE</b>	0 ... 2500 mbar rel.	max. 10 bar rel.	1 mbar
<b>MSD 4 BAE</b>	0 ... 4000 mbar abs.	max. 17 bar abs.	1 mbar	<b>MSD 4 BRE</b>	0 ... 4000 mbar rel.	max. 17 bar rel.	1 mbar
<b>MSD 6 BAE</b>	0 ... 6000 mbar abs.	max. 35 bar abs.	1 mbar	<b>MSD 6 BRE</b>	0 ... 6000 mbar rel.	max. 35 bar rel.	1 mbar
<b>MSD 10 BAE</b>	0 ... 10,00 bar abs.	max. 35 bar abs.	10 mbar	<b>MSD 10 BRE</b>	0,0 ... 10,00 bar rel.	max. 35 bar rel.	10 mbar
<b>MSD 16 BAE</b>	0 ... 16,00 bar abs.	max. 80 bar abs.	10 mbar	<b>MSD 25 BRE</b>	0,0 ... 25,00 bar rel.	max. 50 bar rel.	10 mbar
<b>MSD 25 BAE</b>	0 ... 25,00 bar abs.	max. 50 bar abs.	10 mbar	<b>MSD 40 BRE</b>	0,0 ... 40,00 bar rel.	max. 80 bar rel.	10 mbar
Relative pressure	Measuring range	Overload	Resolution	<b>MSD 60 BRE</b>	0,0 ... 60,00 bar rel.	max. 120 bar rel.	10 mbar
<b>MSD 100 MRE</b>	0,0 ... 100,0 mbar rel.	max. 1 bar rel.	0,1 mbar	<b>MSD 100 BRE</b>	0,0 ... 100,0 bar rel.	max. 200 bar rel.	0,1 bar
<b>MSD 250 MRE</b>	0,0 ... 250,0 mbar rel.	max. 2 bar rel.	0,1 mbar	<b>MSD 160 BRE</b>	0,0 ... 160,0 bar rel.	max. 320 bar rel.	0,1 bar
<b>MSD 400 MRE</b>	0,0 ... 400,0 mbar rel.	max. 2 bar rel.	0,1 mbar	<b>MSD 250 BRE</b>	0,0 ... 250,0 bar rel.	max. 500 bar rel.	0,1 bar
<b>MSD -1/1,5 BRE</b>	-1000 ... +1500 mbar rel.	max. 10 bar rel.	1 mbar	<b>MSD 400 BRE</b>	0,0 ... 400,0 bar rel.	max. 800 bar rel.	0,1 bar
<b>MSD -1/3 BRE</b>	-1000 ... +3000 mbar rel.	max. 17 bar rel.	1 mbar	<b>MSD 600 BRE</b>	0,0 ... 600,0 bar rel.	max. 1200 bar rel.	0,1 bar
				<b>MSD 1000 BRE</b>	0 ... 1000 bar rel.	max. 1500 bar rel.	1 bar

### MSD ...

### Stainless steel pressure sensors without cable

Connection cable MSD-K31 or MSD-K51 has to be ordered separately (Accessories)

**MSD-K31**

**1 m connection cable for MSD-sensors for use with GMH 31xx / GDUSB 1000**

**MSD-K51**

**1 m connection cable for GMH 51xx**

### General Specification

<b>Sensor:</b>	stainless steel pressure sensor (parts coming into contact with media). Suitable for aggressive media, water, etc.
<b>Accuracy:</b> (typ. values)	± 0,2 % FS (hysteresis and linearity) ± 0,02 % FS / K (TC for zero or slope)
<b>Electronics:</b>	PC board with amplifier and data memory for sensor data (meas. range, calibration, etc.) integrated in sensor housing, sealed sensor electronic
<b>Reaction time:</b>	1 ms
<b>Medium temperature:</b>	-25 ... +100 °C (kompensierter Bereich: 0 ... 70 °C)
<b>Working conditions:</b>	-20 ... +80 °C
<b>Storage temperature:</b>	-40 ... +80 °C
<b>Pressure connection:</b>	connection thread G1/2B (other on request).
<b>Cable connection:</b>	M16 built-in plug
<b>Housing:</b>	CrNi-steel (parts coming into contact with media) length: 88,5 mm, Ø 27 mm, approx. 220 g
<b>Protection class:</b>	IP 67 (sensor)

### Options / upcharges

#### Higher probe accuracy

by multi point calibration (additional individual linearisation points are stored in sensor memory)

#### Certificate of calibration WPD5

### Accessories

**MSD-K31** Connection cable for use with GMH 31xx / GDUSB 1000  
1 m PVC connection cable, screened with integral 6-pin Mini-DIN-plug and M16-socket (IP 54)

**MSD-K51** Connection cable for use with GMH 51xx  
1 m PVC connection cable, screened with 7-pin bayonet plug and plug connection water proof acc. to IP 67 and M16-socket

#### MSD-K31-xx

Longer connection cable (as MSD-K31); Length 2 ... 10 m please specify

#### MSD-K51-xx

Longer connection cable (as MSD-K51); Length 2 ... 10 m please specify

### Ex-Protection



#### MSD ... - ex

Stainless steel pressure sensor (without cable) with Ex-protection

#### MSD-K31 - ex

Connection cable with Ex-protection  
Connection to GMH 31xx and GDUSB 1000  
1 m PVC connection cable, screened with integral 6-pin Mini-DIN-plug and M12-socket



### GMSD 1 BTS

### GMSD 1 BTS-K51

**well probe / submersible probe:** use with GMH311x, GMH315x and GDUSB 1000

Application area: measurings in water, aggressive media, etc.

Measuring range: 0 ... 1000 mbar rel. = 0 ... 10 m depth, Sensor cable: approx. 10 m

For further information please refer to the homepage [www.greisinger.de](http://www.greisinger.de)!

### TUBE ADAPTER, COUPLINGS, etc.

**GDZ-13** = Increaser/reducer made of brass with G<sup>1</sup>/<sub>2</sub>" outside thread and G<sup>1</sup>/<sub>8</sub>" inside thread

**GDZ-14** = Screw-in nozzle for 6/4 tube with outside thread G<sup>1</sup>/<sub>8</sub>"

**GDZ-15** = Screw-in nozzle for tube with 6 mm inside-Ø with outside thread G<sup>1</sup>/<sub>4</sub>"

**GDZ-16** = Screw-in nozzle for 6/4 tube with outside thread G<sup>1</sup>/<sub>4</sub>"

**GDZ-20** = Screw-on connection made of brass for 6/4 tube with inside thread G<sup>1</sup>/<sub>4</sub>"

**GDZ-22** = Coupling adapter (NW5) made of brass with tube connection 6/4 (suitable for GDZ-12)

**GDZ-23** = Adapter G<sup>1</sup>/<sub>2</sub>" inside thread to G<sup>1</sup>/<sub>4</sub>" outside thread, made of brass

**GDZ-27** = Manometer profile gasket (thickness 3 mm, Cu) for thread G<sup>1</sup>/<sub>4</sub>"

**GDZ-28** = Flat gasket (thickness 5 mm, Cu) for thread G<sup>1</sup>/<sub>2</sub>"

**GDZ-30** = Adapter G<sup>1</sup>/<sub>2</sub>" inside thread to tube 6/4 (without picture)

**GWA 1214** = Adapter G<sup>1</sup>/<sub>2</sub>" inside thread to G<sup>1</sup>/<sub>4</sub>" outside thread (without picture)



for additional accessories p.r.t.p. 50

# A series of hand-held measuring devices with integrated sensor



- integrated pressure sensor
- sturdy metal connection pin
- tara function / zero point offset
- model with protection available



## Additional features for GMH 3181:

- peak value memory (>1 ms)
- 2 logger functions
- analog output 0 - 1 V
- min-/max- alarm
- integrated horn

**DIGITAL-VACUUM- / BAROMETER** for measuring of absolute pressure.

**GMH 3161-12** (device ready for operation)

**GMH 3181-12** (device ready for operation)

0 ... 1300 mbar abs.

### Version specific data: ... - 12

<b>Measuring range:</b>	0 ... 1300 mbar absolute
<b>Overload:</b>	max. 4 bar absolute
<b>Resolution:</b>	1 mbar
<b>Pressure units:</b>	mbar, bar, kPa, MPa, PSI, mmHg, mmH <sub>2</sub> O - freely select able
<b>Accuracy:</b> (typ. values)	
hysteresis and linearity	± 0,2 % FS
temperature-influence from 0-50°C	± 0,4 % FS
Option higher accuracy available	yes
<b>Sensor:</b>	integrated piezo-resistive absolute pressure sensor. <i>Suitable for air and non aggressive gases.</i> <i>(Note: sensor is not suitable for water!)</i>
<b>Pressure connection:</b>	1 metal connection pin, made of brass, nickel plated, pressure tubes 6x1 mm (4 mm inside-Ø) can be connected

For type specific data please refer to page 53

### Special function:

**SeaLevel-correction:** The barometric air pressure can also be related to sea level "zero".  
(Correction of air pressure is achieved by entering m above "zero")

### Options (upcharges)

**Higher sensor accuracy**  
by multi point calibration  
*Note: not possible for all device types!*

### Certificate of calibration WPD5

(f. ISO9000 ff.) incl. several calibration points of sensor (stored in device memory), Certificate of calibration: 5 points increase, 5 points decrease.

### Certificate of calibration WPD10

(f. ISO9000 ff.) incl. several calibration points of sensor (stored in device memory), Certificate of calibration: 10 points increase, 10 points decrease.

### Special design type (upcharges)

**Ex-protection** II 2 G Ex ib IIC T4)  
device type with Ex-protection  
*(please refer to notes at page 48)*



### Accessories:

**GNG 10/3000** plug-in power supply

**GKK 3000** case (275 x 229 x 83 mm)  
with cut-outs for GMH3xxx

### GRS 3100

interface converter, RS232, electrically isolated

### USB 3100 N

interface converter, USB, electrically isolated

**GDZ-01** PVC-tube (5bar)  
6/4 (6mm outside-Ø, 4mm inside-Ø)

**GDZ-08** Double adapter for  
6/4 tube to 6/4 tube

**GDZ-18** tube clamp for 6/4 tube

**GDZ-21** T-piece for 6/4 tubes

for miscellaneous accessories

p.r.t. pages 50 - 51, 60 - 62

### General function description:

**Tare function:** display value and the min./max values memorized can be set to zero.

**Hold function:** by pressing a button the current meas. value will be memorized.

**Min./Max. value memory:** memorizing of max. and min. values.

**Serial interface:** direct connection to RS232 or USB interface of a PC via electrically isolated interface adapter GRS 3100, GRS 3105 or USB 3100 N.

**Power-Off-function:** device will be automatically switched of if no operating takes place for the time of the power-off delay.  
Selectable values: off, 1 ... 120 min.

### Peak value memory (peak-detect):

In the min-/max-value memory will be detected not filtered pressure peaks  $\geq 1\text{ms}$ .

**Logger operation:** Logger start and stop via the keyboard or interface. Comfortable read-out and display software (GSOFT3050) available as additional equipment.

**Low power logger mode:** (only in measuring cycle "slow") Only one measurement carried out at the end of the respective logger cycle. The battery life is considerably prolonged.  
For long-term recordings (eg. tightness).

**Averaging function:** integrates the meas. values during a selectable period of time and then calculates the average display value.

**Min-/Max-alarm:** the measuring value is constantly monitored if they remain within the min./max. limits set (deactivateable)

- **Alarm:** 3 different alarm settings

- "off" - alarm function deactivated
- "on" - visual alarm via display, interface alarm, alarm sounded via integrated horn.

"no.So." - visual alarm via display and interface alarm

- **Controlling function:** with the help of the switching module GAM3000 (optionally) electric equipment can be switched on/off or alarm monitored (see accessories)

**DIGITAL-FINE MANOMETER / MANOMETER** for over/under pressure and pressure difference.



**GMH 3161-01**

**GMH 3181-01**

-100 ... 2500 Pa (± 2500 Pa \*1)

**GMH 3161-07H**

-1,00 ... 70,00 mbar (± 70,00 mbar \*1)

**GMH 3161-07**

**GMH 3181-07**

-10,0 ... 350,0 mbar (± 350,0 mbar \*1)

**GMH 3161-07B**

-10,0 ... 420,0 mbar (-7,5 ... 315,0 mmHg)

**GMH 3161-13**

**GMH 3181-13**

-100 ... 2000 mbar (± 2000 mbar \*1)

Option, upcharge:

**MB -1...2 BAR**

measuring range: -1000 ... 2000 mbar \*2

Version specific data:	... - 01	... - 07H	... - 07	... - 07B	... - 13
<b>Measuring range:</b>	-100 ... 2500 Pa (-1,00 ... 25,00 mbar)	-1,00 ... +70,00 mbar	-10,0 ... +350,0 mbar	-10,0 ... +420,0 mbar (-7,5 ... 315,0 mmHg)	-100 ... 2000 mbar (optional: -1000 ... 2000 mbar)
<b>Overload:</b>	max. 100 mbar	max. 1000 mbar	max. 1 bar	max. 1 bar	max. 4 bar
<b>Resolution:</b>	1 Pa (0,01 mbar)	0,01 mbar	0,1 mbar	0,1 mbar (0,1 mmHg)	1 mbar
<b>additional pressure units:</b>	bar, kPa, PSI, mmHg, mHzO	bar, Pa, kPa, PSI, mmHg, mHzO	bar, kPa, MPa, PSI, mmHg, mHzO	bar, kPa, MPa, PSI., mHzO	bar, kPa, MPa, PSI, mmHg, mHzO

(typ. values)

hysteresis and linearity	± 0,3 % FS	± 0,1 % FS	± 0,2 % FS	± 0,1 % FS	± 0,2 % FS
temperature-influence from 0-50°C	± 0,4 % FS	± 0,4 % FS	± 0,4 % FS	± 0,4 % FS	± 0,4 % FS
Option higher accuracy available	no	already integrated	yes	already integrated	yes

**Sensor:** integrated piezo-resistive absolute pressure sensor.

*Suitable for air and non aggressive. (Note: sensor is not suitable for water!)*

**Pressure connection:** 2 metal connection pin, made of brass, nickel plated, pressure tubes 6x1 mm (4 mm inside-Ø) can be connected

\*1 measuring range possible by changing the pressure connection ports

\*2 without changing the pressure connection ports

Type specific data:	GMH 3161 - ...	GMH 3181 - ...	GMH 3160 - ... - ex	GMH 3180 - ... - ex
<b>Display:</b>	2 x 4½-digit LCD	2 x 4½-digit LCD	2 x 4½-digit LCD	2 x 4½-digit LCD
<b>Output:</b>	interface	interface or AAG	interface*	interface or AAG*
<b>- serial interface:</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>- analog output:</b>	--	0 - 1V, freely adjustable (resolution 12 bit)	--	0 - 1V, freely adjustable (resolution 12 bit)
<b>Power supply:</b>	9V-battery, d.c. connector <i>suitable 9V-battery (type IEC 6F22) in scope of supply, d.c. connector for external 10.5-12V direct voltage supply. (suitable power supply: GNG10/3000)</i>	9V-battery, d.c. connector	9V-battery, d.c. connector*	9V-battery, d.c. connector*
<b>Sensor adjustment:</b>	digital offset and scale input	digital offset and scale input	digital offset and scale input	digital offset and scale input
<b>Tare, hold, min/max value:</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
<b>Peak value memory:</b>	--	≥1 ms	--	≥1 ms
<b>Measuring cycle: "slow"</b>	4 measurements / s	4 measurements / s	4 measurements / s	4 measurements / s
"fast" (with filter)	--	≥ 1000 meas. / s	--	≥ 1000 meas. / s
"peak-detect"	--	≥ 1000 meas. / s	--	≥ 1000 meas. / s
<b>Logger functions:</b>	--	<b>X</b>	--	<b>X</b>
<b>-manually:</b>	--	99 data sets	--	99 data sets
<b>-cycle:</b>	--	10000 data sets (max. 64 recording sequen.)	--	10000 data sets (max. 64 recording sequences)
<b>-adjustable cycle time:</b>	--	1 ... 3600 seconds	--	1 ... 3600 seconds
<b>Averaging function:</b>	--	<b>X</b>	--	<b>X</b>
<b>Min-/max-alarm:</b>	--	<b>X</b>	--	<b>X*</b>
<b>Real-time clock:</b>	--	<b>X</b>	--	<b>X</b>
<b>Power consumption:</b>	approx. 0.6 mA	approx. 0.6 mA (slow mode) max. 2.5 mA (fast = 1000Hz)	max. 0.6 mA	max. 0.6 mA (slow mode) max. 2.5 mA (fast = 100Hz)
<b>Working condition:</b>	-25 to +50 °C, 0 to +95 %RH (non-condensing)		-10 to 50 °C, 0 to 95 %RH (non-condensing)	
<b>Housing dimensions:</b>	142 x 71 x 26 mm (without pressure connection pin - pin approx. 11 mm protruding at front side of device), impact-resistant ABS plastic housing. Front side IP65		integrated pop-up clip for table top or suspended use.	
<b>Weight:</b>	approx. 165 g	approx. 170 g	approx. 205 g (incl. case)	approx. 210 g (incl. case)

\* Please refer to note to Ex-design types at page 48



**FINE MANOMETER** for over/under pressure or pressure difference

### GDH 200 - 07

0.00 to 19.99 / 199.9 mbar ( $\pm 199.9$  mbar)

Device ready for use incl. battery

#### Functions:

- Autorange
- Excellent zero point stabilisation
- Manual slope adjustment
- 4 selectable measuring units: Pa, mbar, mmHg, PSI
- automatic off-function: 1 ... 120 Min

#### Specification

##### Measuring range:

0.00 ... 19.99 resp. 20.0 ... 199.9 mbar (hPa)

0.00 ... 19.99 resp. 20.0 ... 150.0 mmHg

0.000 ... 1.999 PSI / 0 ... 1999 Pa

**Resolution:** automatic change 0.1 / 0.01

**Overload:** max. 500 mbar

**Accuracy:** (at nominal temperature = 25 °C and automatic Zero point-adjustment)

Measuring range: up to 200 mbar

$\pm 0,2$  % f.s. hysteresis and linearity

$\pm 0,4$  % f.s. temperature drift from 0 to 50 °C

Measuring range: up to 20 mbar

$\pm 1$  % f.s. hysteresis and linearity

$\pm 2$  % f.s. temperature drift from 0 to 50 °C

**Sensor:** piezoresistive relative pressure sensor

**Pressure connection:** 2 pressure port sockets made of nickel-plated brass, for flexible pressure tubings 6x1 mm (4 mm inner-diameter), approx. 11 mm protrusive.

**Working temperature:** -25 to 50 °C

**Display:** 3½ digit LCD display, approx. 13 mm high

**Pushbuttons:** 3 membrane keys

**Power supply:** 9V battery type JEC 6 F 22 (included)

**Power consumption:** approx. 250  $\mu$ A (= 1200 operating hours)

**Low battery warning:** „BAT“, automatic

**Housing:** impact resistant ABS plastic housing

**Dimensions:** approx. 106 x 67 x 30 mm

(H x W x D) without pressure port sockets

**Weight:** approx. 135 g (incl. battery)

**Auto-Off-Function:** 1...120 min (can be deactivated either).

**Min./Max. value memory:** Memorizing of max. and min. values.

**Zero point-adjustment:** automatically

**Slope-adjustment:** manually

**Zero function:** Display value and min-/max value are set to null.

**Tubes, clamps, adapters, accessories, etc. p.r.t. pages 50/51, 60/61**



**MANOMETER** for over/under pressure or pressure difference

### GDH 200 - 13

0.0 to 199.9 / 1999 mbar ( $\pm 1999$  mbar)

Device ready for use incl. battery

#### Functions:

- Autorange
- Excellent zero point stabilisation
- Manual slope adjustment
- 3 selectable measuring units: mbar, mmHg, PSI
- automatic off-function: 1 ... 120 Min

#### Specification

##### Measuring range:

0.0 ... 199.9 resp. 200 ... 1999 mbar (hPa)

0.0 ... 199.9 resp. 200 ... 1500 mmHg

0.00 ... 19.99 PSI

**Resolution:** automatic change 1 / 0.1

**Overload:** max. 4000 mbar

**Accuracy:** (at nominal temperature = 25 °C and automatic Zero point-adjustment)

Measuring range: up to 2000 mbar

$\pm 0,2$  % f.s. hysteresis and linearity

$\pm 0,4$  % f.s. temperature drift from 0 to 50 °C

Measuring range: up to 200 mbar

$\pm 1$  % f.s. hysteresis and linearity

$\pm 2$  % f.s. temperature drift from 0 to 50 °C

**Sensor:** piezoresistive relative pressure sensor

**Pressure connection:** 2 pressure port sockets made of nickel-plated brass, for flexible pressure tubings 6x1 mm (4 mm inner-diameter), approx. 11 mm protrusive.

**Working temperature:** -25 to 50 °C

**Display:** 3½ digit LCD display, approx. 13 mm high

**Pushbuttons:** 3 membrane keys

**Power supply:** 9V battery type JEC 6 F 22 (included)

**Power consumption:** approx. 250  $\mu$ A (= 1200 operating hours)

**Low battery warning:** „BAT“, automatic

**Housing:** impact resistant ABS plastic housing

**Dimensions:** approx. 106 x 67 x 30 mm

(H x W x D) without pressure port sockets

**Weight:** approx. 135 g (incl. battery)

**Auto-Off-Function:** 1...120 min (can be deactivated either).

**Min./Max. value memory:** Memorizing of max. and min. values.

**Zero point-adjustment:** automatically

**Slope-adjustment:** manually

**Zero function:** Display value and min-/max value are set to null.

**Tubes, clamps, adapters, accessories, etc. p.r.t. pages 50/51, 60/61**



**VAKUUM-/BAROMETER** and **MANOMETER** for absolute pressure

### GDH 200 - 14

0 to 11000 mbar abs.

Device ready for use incl. battery

#### Functions:

- Sea level-adjustment possible
- suitable for relative pressure measurement (-1...10 bar) by use the zero function
- Manual slope and offset adjustment
- 4 selectable measuring units: mbar, mmHg, bar, PSI
- automatic off-function: 1 ... 120 Min

#### Specification

##### Measuring range:

0 ... 11000 mbar (hPa) abs.

0 ... 8250 mmHg abs.

0.000 ... 11.000 bar abs.

0.00 ... 160.00 PSI abs.

**Resolution:** 1 mbar, 1 mmHg, 0.001 bar, 0.02 PSI

**Overload:** max. 13 bar abs.

**Accuracy:** (at nominal temperature = 25 °C)

$\pm 3$  mbar or 0,1 % of m.v. (whichever is higher)

$\pm 0,3$  % f.s. temperature drift from 0 to 50 °C

**Sensor:** piezoresistive absolute pressure sensor

**Pressure connection:** pressure port socket made of nickel-plated brass, for flexible pressure tubings 6x1 mm (4 mm inner-diameter), approx. 11 mm protrusive.

**Working temperature:** -25 to 50 °C

**Display:** 4½ digit LCD display, approx. 12 mm high

**Pushbuttons:** 3 membrane keys

**Power supply:** 9V battery type JEC 6 F 22 (included)

**Power consumption:** approx. 40  $\mu$ A (= 7500 operating hours)

**Low battery warning:** „BAT“, automatic

**Housing:** impact resistant ABS plastic housing

**Dimensions:** approx. 106 x 67 x 30 mm

(H x W x D) without pressure port socket

**Weight:** approx. 135 g (incl. battery)

**Sea level-adjustment:** barometric air pressure can be displayed null based even at sea level.

(the pressure-adjustment is entered in metres above "null")

**Auto-Off-Function:** 1...120 min (can be deactivated either).

**Min./Max. value memory:** Memorizing of max. and min. values.

**Zero point-adjustment:** automatically

**Slope-adjustment:** manually

**Zero function:** Display value and min-/max value are set to null.

**Tubes, clamps, adapters, accessories, etc. p.r.t. pages 50/51, 60/61**



## BAROMETER

### GPB 3300

Device ready for use incl. battery

#### Functions:

- manual offset and slope adjustment
- sea level-adjustment possible
- 2 measuring units selectable: mbar, mmHg
- Auto-off-function: 1...120 Min

#### Specification

##### Measuring ranges:

300.0 ... 1100.0 mbar (hPa) abs.  
225.0 ... 825.0 mmHg abs.

**Max. Overload:** 4000 mbar resp. 300 mmHg

**Accuracy:** (at nominal temperature)  
± 2.0 mbar (typ., at 0 - 50 °C)

**Sensor:** piezoresistive abs. pressure sensor integrated in housing.

**Nominal temperature:** 25°C

**Operating temperature:** -25 to 50 °C

**Display:** 4½-digit, 12 mm high LCD-display

**Pushbuttons:** 3 membrane key for ON/OFF, min-/max-value memory, tara, etc.

**Power supply:** 9V battery type IEC 6F22

**Power consumption:** approx. 60 µA  
(= 5000 operating hours)

**Low battery warning:** „BAT“, automatic

**Housing:** impact resistant ABS housing

**Dimensions:** approx. 106 x 67 x 30 mm (HxWxD)

**Weight:** approx. 135 g (incl. battery)

**Sea level-adjustment:** barometric air pressure can be displayed null based even at sea level. (the pressure-adjustment is entered in metres above "null")

**Auto-Off-Function:** 1...120 min (can be deactivated either).

**Min./Max. value memory:** Memorizing of max. and min. values.

**Zero point-adjustment:** automatically

**Slope-adjustment:** manually

**Zero function:** Display value and min-/max value are set to null.

#### Accessories

**GKK 252** small case  
(235 x 185 x 48 mm) with foam lining

**GB 9 V** spare battery

other accessories p.r.t. page 60/61



## altimeter / barometer / thermometer

### GTD 1100

Device ready for use incl. battery

#### Functions:

- manual offset and slope-adjustment
- sea level-adjustment possible
- tendency-meter, summing-function (ascendency, descendency, overall)
- over 6.000 operating hours

#### Specification

##### Measuring ranges:

Temperature:	-10,0 ... +50,0°C,	Res. 0,1°C	or	14,0 ... +122,0°F,	Res. 0,1°F
Pressure:	300,0 ... 1100,0mbar,	Res. 0,1mbar	or	225,0 ... 825,0mmHg,	Res. 0,1mmHg
High:	-500 ... -200m,	Res. 1m	or	-1640 ... -655ft,	Res. ~5ft
	-200 ... 2000m,	Res. 0.5m	or	- 654 ... 1999ft,	Res. ~2ft
	2000 ... 9000m,	Res. 1m	or	2000 ... 19999ft,	Res. ~5ft

**Measuring units:** hPa / mbar, mmHg, °C, °F, m, ft

**Max. Overload:** pressure:4000 mbar resp. 3000 mmHg

**Accuracy:** (at nominal temperature = 25°C)

Temperature: ±1% FS ± 1digit

Absolute pressure: ±1.5mbar ±1 digit (750...1100mbar), with certificate of calibration: ±0.5mbar ± 1digit

**Sensor:** piezoresistive absolute pressure sensor, integrated in housing.

**Operating conditions:** -10 to 50 °C; 0 to 80 %RH (non condensing)

**Storage temperature:** -20 to 70 °C

**measuring-frequency:** 1 measurings / sec.

**Display:** approx. 12 mm high, 4½-digit LCD-display

**Controls:** keypad (3 push-buttons) for On/off, min-/max-value, tara-function, zero-, slope-, and sea level-adjustment slide switch for unit selection.

**Power supply:** 9V battery type IEC 6F22 (included)

**Power consumption:** approx. 50 µA (= over 6.000 operating houres with standard zinc carbon batteries)

**Low battery warning:** „BAT“, automatic in case of low voltage

**Housing:** impact resistant ABS housing, lucent screening grid. front IP65

**Dimensions:** approx. 106 x 67 x 30 mm (H x W x D)

**Weight:** approx. 135 g (incl. battery)

**Sea level-adjustment:** barometric air pressure can be displayed null based even at sea level. (the pressure-adjustment is entered in metres above "null")

**Tendency-meter:** for fallng / rising air pressure

**Sum-function:** Displaying the elevation (in metres for ascendency, descendency, overall)

**Min./Max. value memory:** Memorizing of max. and min. values.

**Zero function:** Display-value, min-/max-value are set to null (altitude and air pressure)

**Auto-Off-Function:** 1...120 min (can be deactivated either).

**Zero point- and slope-adjustment:** manual adjustment (for temperature and air pressure)

**Zero function:** Display- and min-/max-value are set to null.

**System Notifications:** permanent self-diagnosis and error indication.

#### Accessories

**GKK 252** small case  
(235 x 185 x 48 mm) with foam lining

**GB 9 V** spare battery

other accessories p.r.t. page 60/61

## Precision barometer

for professional usage in measurement technology as well as in spare time sports

- resolution 0.1 mbar
- for simple determination of a building size (steeples, skyscrapers, bridges, etc.)
- further application areas: hiking, hang gliding, cycling, motor-sports, etc.

**Certificate of calibration, WPD 5**  
5 points rising, 5 points falling

calibration certificate, p.r.t. page 4



## pressure measuring instruments with analog output 0 - 1 V



**DIGITAL MANOMETER for over/under pressure or pressure difference**

**GDH 01 AN** (0...1999 Pa)

**GDH 07 AN** (0...199,9 mbar)

Device ready for use incl. sensor (plug-in), battery and mains operation possible, analog output: 0-1V

**Specification:**

**Measuring range:**

**GDH 01 AN**

0 ... 1999 Pa relative  
(0 ... 19.99 mbar)  
max. 10000 Pa rel.

**Overload:** (no destruction or new calibration of sensor)

**Resolution:**

1 Pa (0,01 mbar)

**Accuracy (device):**

1 Pa ±1 digit

(at nominal temperature = 25°C)

**Temperature drift (device):**

±0,01 %/K

**Sensor: (relative pressure)**

piezoresistive relative pressure sensor, externally mounted in plastic case, 2 connection pins for plastic tube 6 x 1 mm (4 mm inner Ø), approx. 1 m of 4-wire PVC connecting cable with Mini-DIN 4-pin plug.

**Sensor: (absolute pressure)**

piezoresistive absolute pressure sensor, externally mounted in plastic case, 1 connection pins for plastic tube 6 x 1 mm (4 mm inner Ø), approx. 1 m of 4-wire PVC connecting cable with Mini-DIN 4-pin plug.

**Application area:**

Sensor suitable for air and non aggressive gases and liquids.

**Sensor accuracy: (typical values)**

hysteresis and linearity

± 0,5 % f.s.

± 0,2 % f.s.

± 0,2 % f.s.

± 0,2 % f.s.

± 0,2 % f.s.

temperature drift (0 - 50°C)

± 0,4 % f.s.

± 0,4 % f.s.

± 0,4 % f.s.

± 0,4 % f.s.

± 0,4 % f.s.

for option double accuracy

± 0,1 % / ± 0,2 % f.s.

± 0,1 % / ± 0,2 % f.s.

± 0,1 % / ± 0,2 % f.s.

± 0,1 % / ± 0,2 % f.s.

**Working temperature:**

0 to 50 °C (device)

-40 to +85°C (sensor), Temperature of sensor will be compensated from 0 to 70 °C

**Display:**

3½ digit LCD display, approx. 13 mm high

**Power supply:**

9V battery type JEC 6 F 22 (included).

Additional power supply socket for 2.5 mm Ø jack connector (automatic battery disconnection)

**Power consumption:**

approx. 5 mA

**Low battery warning:**

„BAT“

**Analog output:**

0...1 V = 0...1999 Pa    0...1 V = 0...199,9 mbar    0...1 V = 0...1300 mbar    0...1 V = 0...1999 mbar    0...1 V = 0...10,00 bar

socket for 3,5 mm Ø jack connector (included)

**Dimensions:**

approx. 150 x 86 x 30 mm (H x W x D), impact resistant ABS plastic housing with integrated pop-up clip for table-top or suspended use, clips for lateral mounting of probe.

**Dimensions sensor case:**

approx. 26 x 67.5 x 15 mm (H x W x D) with suspension eye.

**Weight:**

approx. 320 g (incl. battery and sensor)

**Options:**

sensor with higher accuracy

**Accessories:**

**GB 9 V** spare battery

**GNG 10** power supply

**GAK 9 V** accu 9V

**GLG 1300** accu charger for charging of two 9V accus at the same time

**GKK 252** small case (235 x 185 x 48 mm) with foam lining

**DIGITAL MANOMETER for over/under pressure or pressure difference**

**GDH 13 AN** (0...1999 mbar)

**GDH 14 AN** (0...10,00 bar)

Device ready for use incl. sensor (plug-in), battery and mains operation possible, analog output: 0-1V

**DIGITAL-VAKUUM-/BAROMETER for absolute pressure measurements**

**GDH 12 AN**

Device ready for use incl. sensor (plug-in), battery and mains operation possible, analog output: 0-1V

**GDH 13 AN**

0 ... 1999 mbar (hPa) rel.

max. 4 bar rel.

1 mbar

1 mbar ±1 digit

± 0,2 % f.s.

± 0,4 % f.s.

± 0,1 % / ± 0,2 % f.s.

± 0,2 % f.s.

± 0,4 % f.s.

± 0,1 % / ± 0,2 % f.s.

± 0,2 % f.s.

± 0,4 % f.s.

± 0,1 % / ± 0,2 % f.s.

**Accessories:** (for pressure connection)

**GDZ-01** PVC-tube (5bar) 6/4 (6mm outside-Ø, 4mm inside-Ø)

**GDZ-08** Double adapter for 6/4 to 6/4 tube

**GDZ-16** Reducer for 6/4 tube with external thread G<sup>1</sup>/<sub>4</sub>"

**GDZ-18** Tube clamp for 6/4 tube

**GDZ-21** T-piece for tubes 6/4

**additional tubes, clamps, accessories, etc. p.r.t. page 50/51**

**GKK 1100** case (340 x 275 x 83 mm) with foam lining for universal use

**GKK 3000** case (275 x 229 x 83 mm) with punched lining suitable for all devices of the GMH3xxx-series

**GKK 3100** case (275 x 229 x 83 mm) with foam lining for universal use

**additional accessories p.r.t. page 60/61**

## Universal pressure measurement system with fast recording time



### GDUSB 1000

Full set incl. software for high-speed live measurement data logging GDUSB FastView

#### Applications:

- Test rigs and laboratory experiments
- Detection of pressure peaks
- Monitoring system pressure curves e.g. for process technology, engineering, etc.
- Live and offline displaying of measuring data of several GDUSB 1000 e.g. for data evaluation and logging, for optimization of processes and other statistics
- Multi-channel measurements with high recording rate
- Test setups or on-site recordings with GDUSB 1000

#### General description::

The GDUSB 1000 adapter allows to connect a standard pressure sensor of type GMSD / MSD directly to the USB interface of a PC. It provides 4 channels, i.e. currently measured value, average value, max and min value. There are two operation modes:

##### Fast mode:

A GDUSB 1000 in fast mode can output up to 1000 measured values per second. The provided software displays the data and records for later usage.

The software can be configured to start or stop the recording with several selectable trigger conditions

##### Standard mode:

A GDUSB 1000 in standard mode can be responded similarly to GMH handheld devices or EASYBus modules (up to 32 measurements per second).

Then a long term recordings can be archived with the software EBS 20M / EBS 60M (2 measurements per second).




#### Specifications:

<b>Measuring ranges:</b>	depends on connected sensor
<b>Max. range:</b>	-19999 ... +19999 digit
<b>Pressure units:</b>	mbar, bar, Pa, kPa, Mpa, mmHg, PSI, mH2O, selectable, depending on connected sensor
<b>Measuring rate:</b>	1000 measurements / second
<b>Accuracy:</b>	±0.2 % FS (at nominal temperature = 25 °C)
<b>Recording interval:</b>	1 ms (FAST mode) till 10 s adjustable via software
<b>Connections:</b>	
<b>PC:</b>	standard USB plug (type A)
<b>GMSD/MSD:</b>	6-pole screened mini-DIN socket with locking
<b>Power supply:</b>	supplied by USB interface
<b>Dimensions:</b>	56 x 31 x 24 mm.
<b>Cable length (USB):</b>	approx. 20 cm

Suitable GMSD/MSD sensors for GDUSB 1000 are at page 50 / 51.

### INNOVATION FOR PRESSURE MEASUREMENTS

- suitable for all GMSD and MSD pressure sensors
- 1000 measurements per second
- pressure peaks detection (1 ms)
- data transfer via USB interface
- complete package incl. software for up-to-date Windows systems
- live display before and during measurement
- live diagram display during measurement
- simultaneous support of several GDUSB 1000
- 4 measuring channels (display value, min-, max- value and average)

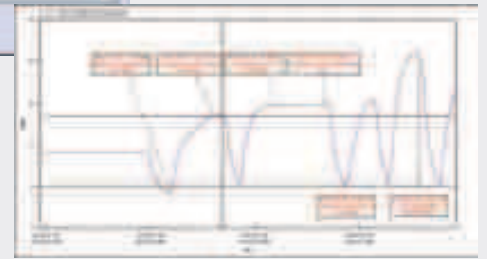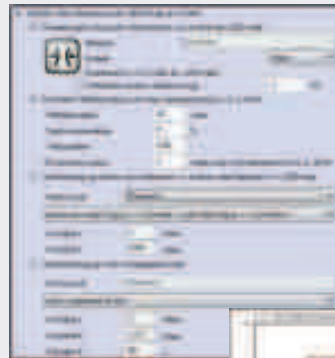

### GDUSB FastView

Software for high-speed live measurement data logging of fast pressure measurements


- More than one GDUSB 1000 usable at one PC at the same time
- Measuring rates up to 1000 measurements per second
- Live display with current value and measurement diagram, even for highest measuring rates
- Different measuring rates for each sensor selectable
- Safe storage of measurement and sensor data in a SQL based data set
- Fast diagram display
- Comment function for measured values
- Data export as CSV file and as picture
- Multi-language software (German, English, French, Italian, Czech)
- 32-bit or 64-bit application

#### System requirements:

1GHz CPU, 1GB RAM, 100 MB HDD, 1 available USB Port  
Microsoft .NET 4.0 Framework  
Microsoft Visual Studio 2010 Runtime  
SQLite  
SiLabs USB VCP driver  
Microsoft Windows XP SP3 (32 or 64 Bit)  
Microsoft Windows Vista SP2 (32 or 64 Bit)  
Microsoft Windows 7 SP1 (32 or 64 Bit)  
Microsoft Windows 8 (32 or 64 Bit)  
(not executable with Windows RT, ARM or Intel Itanium based Windows systems)

*This software uses open-source components under LGPL conditions.  
The license terms of this software provide further information.*

## Measuring devices for volumetric flow and flow speed

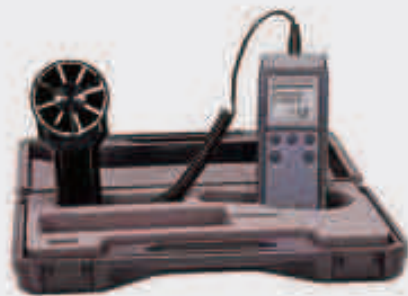

Volumetric flow anemometer

### GVA 0430

cpl. in case, incl. RS232 interface cable and software

- flow rate
- volumetric flow
- temperature

#### Application:

Ventilation and air conditioning technology, meteorology, water sport, air gliding etc.

#### Specification:

##### Meas. ranges:

**Flow rate:** 0,40 m/s to 30,00 m/s

**Temperature:** -10,0 ... +50,0°C

**Resolution:** 0,01 m/s resp. 0,1 °C

**Accuracy:** (at nominal temperature = 25°C)

**Flow rate:** ±2 % FS

**Temperature:** ±0,6 °C

**Meas. probes:** vane probe, 70mm rotor-Ø and precision-NTC

**Meas. interval:** 1 meas. / sec.

**Display:** 2-line LCD display, 37 x 42 mm

**Working temperature:** -10 to +50°C

**Relative humidity:** 0 to +95%r.h. (non-condensing)

**Storage temperature:** -10 to +50° C

**Interface:** serial interface RS232

**Special function:** averaging of 8 meas. points, averaging throughout meas. time, volumetric flow calculation, hold function, min./max. value memory

**Power supply:** 9V-batteries, type IEC 6F22 (included) or via external power supply

**Operating time:** 100 hours (with alkaline)

**Low battery warning:** display blinking

**Automatic-Off-function:** device switches off automatically after 20 minutes. Permanent mode possible.

**Housing dimensions:** :

device: 183 x 76 x 45 mm (W x H x D),

probe: 155 x 75 x 42 mm (W x H x D),

**Weight:**

approx. 350g (meas. device and probe)

approx. 1.05kg (cpl. in case)

#### Accessories:

**GNG 8901** power supply



Thermal anemometer

### TA 888

complete set in case, incl. software

- high accuracy
- smallest and slow air flows measurable
- slimline telescopic probe

#### Applications:

Classic application of the TA 888 is flow measurement in ventilation ducts. Due to its high resolution of 0.01 m/s even smallest changes of the flow velocity can be easily and fast detected. The sensor's small dimensions ensure measurements yet in thin tubes and confined spaces.

Further applications are function and dirt checks of filters and exhaust ducts as well as measurements of room air velocity, e.g. for workspace checks.

#### Specifications:

##### Measuring range:

**Flow:** 0.10 m/s ... 25.00 m/s

**Temperature:** 0.0 ... +50.0°C

##### Resolution:

**Flow:** 0.01 m/s

**Temperature:** 0.1 °C

##### Accuracy:

**Flow:** (5 % + 0.1 m/s) FS

**Temperature:** ±1 °C

**Display:** LCD display

**Meas. interval:** approx. 0.8 s

**Working temp.:** 0 ... 50 °C

**Relative hum.:** 0 ... 80 % RH

##### Dimensions:

- **Housing:** 210 x 75 x 50 mm (H x W x D)

- **Telescopic probe:** extendable up to 1150 mm (incl. handle), Ø 10 mm

- **Cable:** 2 m

**Wight:** approx. 275 g (only measuring device)

approx. 1800 g (complete set in case)

**Scope of supply:** measuring device, battery, probe, case, power supply, USB cable, software

#### Accessories:

**Calibration certificate** (10 points) (without device)

**DKD- certificate** (10 points) (without device)

## Phonometer



Phonometer

### GSH 8922

with analog output, backlight display cpl. in case

#### General:

Compensation of the background-noise for measuring sound-sources in the foreground. Weighting of the sound level via two weighting-filters according to the IEC standard. Assignment of the max/min value during one measuring period.

#### Specification:

**Measuring ranges:** 30 - 130 dB (6 ranges)

30 - 80, 40 - 90, 50 - 100,

60 - 110, 70 - 120, 80 - 130 dB

manual or automatic selection of range

**Resolution:** 0,1 dB

**Accuracy:** ±1,5 dB

**Norms:** ANSI S1.4 and IEC 651 Typ 2

**Frequency rate weighted:** 31,5 Hz - 8 kHz

**Evaluation weight filter:** 2, selectable

**Type A:** evaluation of the spectrum in accordance with the perceptive faculties of the human ear.

(Sound insulation establishment, environmental analysis)

**Type C:** linear evaluation of spectrum

(sonic-analysis of engines or machines)

**Weight of time factor:** fast or slow

**Microphone:** 6mm Electret condenser mic.

**Display:** 3½-digit LCD-backlight display,

additionally quasi-analog bar graph

**Analog output:** AC: 0.707 Vrms, DC: 10mV DC / dB

**Working temperature:** 4 to +50°C

**Relative humidity:** 10 to +90 % RH

**Storage temperature:** -20 to +60° C

**Interface:** RS232, (2400BD8N1)

**Power supply:** 9V-batteries, type IEC 6F22

(included) or via external 9V power supply

**Operating time:** 20 hours (with alkaline)

**Housing:** 256 x 80 x 38 mm (H x W x D)

**Weight:** approx. 240g (meas. device)

## Rotation speed measuring device

via light and reflecting label or measuring tip;  
velocity and length measurement via measuring wheel



### rotaro 3

Rotation speed measuring device incl.

- Reflecting labels
- Measuring tip, hollow tip, measuring wheels ( $\varnothing$  0.1 m and  $\varnothing$  6")
- extension shaft
- Calibration certificate
- Case
- Battery

#### Applications:

The handheld tachometer rotaro 3 is useful at the installation and setup of plants and machinery as well as for service application, monitoring production processes or use at development laboratory. The rotaro 3 can measure rotary speed of for example motors, turbines, pumps as well as stirring devices, centrifuges and haulage installations, foil or textile manufacturing units, coil and transformer winding machines, machine tools, etc. Furthermore it can measure running speed and length of foils and band of all kind..

#### Specifications:

Measuring range:

**rpm:** 1.00 ... 99,999 min<sup>-1</sup> (optical measurement)  
1 ... 19,999 min<sup>-1</sup> (mechanical measurement)

**Velocity:**  $\varnothing$  0.1 m: 0.10 ... 1999 m/min  
 $\varnothing$  6": 0.10 ... 1524 m/min  
(other units possible: m/sec, ft/min, in/min ...)  
0 ... 99999 m / ft / in

**Length:** 0 ... 99999 m / ft / in

**Accuracy:**

**rpm:**  $\pm$  0.02% of m.v. ( $\pm$  1 digit)

**Meas. distance:** max. 600 mm

**Meas. principle:** optical/ mechanical

**Memory function:** min- / max- value memory,  
average and last value

**Power-off:** automatically after 30 s

**Display:** 5-digit LCD display with 10 mm height of digits  
and floating point at range change

**Power supply:** 2 x AA battery or accumulator

**Working temp.:** 0 ... 50 °C

**Storage temp.:** -20 ... 70 °C

**Housing:** plastic ABS

**Approval:** CE

**Dimensions:** 175 x 60 x 28 mm (H x W x D)

**Weight:** 250 g

## Rotation speed measuring device

via light and reflecting label



### ecotach

Rotation speed measuring device incl.

- Reflecting labels
- Transportation slip case
- Battery

#### Applications:

The handheld tachometer ecotach is useful at the installation and setup of plants and machinery as well as for service application, monitoring production processes or use at development laboratory. The rotaro 3 can measure rotary speed of for example motors, turbines, pumps as well as stirring devices, centrifuges and haulage installations.

#### Specifications:

**Measuring range:** 1 ... 60.000 rpm

**Accuracy:**  $\pm$  0,02 % v. MW ( $\pm$  1 Digit)

**Meas. distance:** max. 450 mm

**Meas. principle:** optical

**Power-off:** automatically after 30 s

**Display:** 5-digit LCD display for measuring value with  
floating point, measuring unit, trigger signal,  
low-battery warning

**Power Supply:** 2 x AA battery or accumulator

**Working temp.:** 0 ... 50 °C

**Housing:** plastic ABS

**Approval:** CE

**Dimensions:** 145 x 60 x 28 mm (H x W x D)

**Weight:** 147 g

# Handheld instruments - Accessories

## Device case:

- GKK 3000** with punched lining for 1 device of the GMH 3xxx-series (275 x 229 x 83 mm)
- GKK 1105** with punched lining for 1 device of the GMH 3xxx- or 5xxx-series (340 x 275 x 83 mm)
- GKK 3500** with punched lining for 1 device of the GMH 3xxx-series (394 x 294 x 106 mm)
- GKK 1420** with punched lining for 2 devices of the GMH 3xxx-series (450 x 360 x 123 mm)



## Universal case:

- ① **GKK 252** with foam lining for universal use (235 x 185 x 48 mm)
- ② **GKK 3100** with foam lining for universal use (275 x 229 x 83 mm)
- ③ **GKK 1100** with foam lining for universal use (340 x 275 x 83 mm)
- ④ **GKK 3600** with foam lining for universal use (394 x 294 x 106 mm)
- ⑤ **GKK 3700** with foam lining for universal use (450 x 360 x 123 mm)

## Protection bag:

- ST-R1** Nappa leathern device protection bag with 1 round cut-out for sensor connection suitable for: GMH 3111, GMH 3151, GMH 3161-12, GMH 3181-12, GMH 3410, GMH 3430, GMH 3610, GMH 3630, GMH 3691, GMH 3710, GMH 3750, GMH 175
- ST-R2** Nappa leathern device protection bag with 2 round cut-outs for sensor connection suitable for: GMH 3156, GMH 3161-01, GMH 3161-07, GMH 3161-13, GMH 3181-01, GMH 3181-07, GMH 3181-13, GMH 3510, GMH 3530
- ST-N1** Nappa leathern device protection bag with 1 rectangular cut-out for sensor connection suitable for: GMH 3210, GMH 1150, GMH 1170
- ST-N2** Nappa leathern device protection bag with 2 rectangular cut-outs for sensor connection suitable for: GMH 3230, GMH 3250
- ST-RN** Nappa leathern device protection bag with 2 round cut-outs for sensor connection suitable for: GMH 3330, GMH 3350, GMH 3830, GMH 3850
- ST-KO** device protection bag suitable for: GTD 1100, GPB 2300, GPB 3300
- ST-KN** device protection bag with rectangular cut-out for sensor connection suitable for: GTH 1150, GTH 1170
- ST-KR** device protection bag with round cut-out (central) suitable for: GTH 175, GOX 20, GOX 100, GLF 100, GLF 100 RW
- ST-KF** device protection bag with punched-out slot for a sensor head suitable for: GFTH 95, GFTH 200, GFTB 100
- ST-KD** device protection bag with 2 round cut-outs suitable for: GDH 200 - 07, GDH 200 - 13, GDH 200 - 14, GMR 100



## Mount:

- GEH 1** Electrode retainer for measuring electrodes and probes suitable for our electrodes (pH/redox, conductivity, oxygen, ...) and temperature probes with plastic handle
- GMH 1300** Magnetic mount for hanging up devices with integrated suspension clip



Handheld instrument  
Display / Controller  
Logger / EASYBus  
Transmitter  
Temperature probe  
Alarm / Protection

# Handheld instruments - Accessories



## Interface:

- USB 3100 N** Interface converter GMH 3xxx  $\Leftrightarrow$  PC, for electrically isolated connection of a GMH 3xxx to the USB-interface of your PCs. (Converter supplying from PC interface)
- USB 5100** Interface converter GMH 5xxx  $\Leftrightarrow$  PC, for electrically isolated connection of a GMH 5xxx to the USB-interface of your PCs. (Converter supplying from PC interface)
- GRS 3100** Interface converter GMH 3xxx  $\Leftrightarrow$  PC for electrically isolated connection of a GMH 3xxx to the RS232-interface
- GRS 3105** 5-point interface converter GMH 3xxx  $\Leftrightarrow$  PC, connection of 5 GMH 3xxx to the RS232-interface of your PCs. (Converter supply achieved via permanently connected power supply) Device delivered with 9-pin DSub extension cable and 5 connection cables VEKA3105
- VEKA 3105** Spare connection cable GMH 3xxx  $\Leftrightarrow$  GRS 3105
- GSA 25S-9B** Connection adapter (25-pin Dsub-adapter  $\Leftrightarrow$  9-pin Dsub-socket)
- GSA 9S-25B** Connection adapter (9-pin Dsub-adapter  $\Leftrightarrow$  25-pin Dsub-socket)
- USB-Adapter** for connection of a RS232-interface converter to the USB-interface

## Plug and Cable

- MINIDIN 4S** Mini-DIN plug, 4-pin, with lock and for self installation
- AAG2M** 2 m analog output cable, 2x banana plug

## Power supply:

- GB 9V** Spare battery 9V, type IEC 6F22
- GLI 9V** Lithium battery 9V, approx. 1200 mAh
- GAK 9V** NiMH accu 9V
- AAA-AKKU** AAA akku, 1.5 V, 2 pcs., NiMH akku
- GLG 1300** Rechargeable battery charger for two 9V accus, AA- or AAA-batteries at the same time
- GNG 09** Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 12 V / 300 mA, suitable for devices with 2.5 mm jack connector
- GNG 10** Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 10.5 V / 10 mA, suitable for devices with 2.5 mm jack connector (e.g. for devices of the series GDH ...)
- GNG 5 / 5000** Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 5 VDC, suitable for devices with BNC (e.g. for devices of the series GMH5XXX) NEW
- GNG 10 / 3000** Plug-in power supply (220 / 240 V, 50 / 60 Hz), output voltage: 10.5 V / 10 mA, suitable for devices with power supply socket (e.g. for devices of the series GMH3XXX)
- GNG 8901** Plug-in power supply (220 / 240V, 50 / 60 Hz), output voltage: 9 V / 500 mA, suitable for devices with DC device socket 5.4 / 2.1 (suitable for GVA 0430)




## Switching modules:

- GAM 3000** Switching module for the GMH3xxx-series
- The GAM 3000 is an alarm or control output for the devices of the GMH3xxx-series with alarm output function. The GAM 3000 is controlled via the serial interface of the GMH3xxx. The setting of the alarm/switching limits are carried out the GMH3xxx as usual. You can choose between 2 different switching modes:
- **Alarm output:** Relay switches when the measuring value is no longer within the min./max. alarm limit values or an error state occurs at the set channel.
  - **Control output:** In this case the min./max. values are not used as alarm points but as on/off switching points. In case of an error state the relay switches in its preferred state "off".
- The desired switching function can be selected via an externally accessible miniature switch.
- Power supply:** 220 / 240 V, 50 / 60 Hz
  - Switching output:** controlled power socket, selector switch to choose switching state normally-open or normally-closed
  - Switching power:** 10 A (ohmic load)
  - GMH-connection:** GMH3xxx interface and supply (integrated power supply 10.5V/10mA) via 1 m cable each, permanently connected to GAM 3000.
  - Dimensions:** (controller) 112 x 71 x 48 mm (H x W x D)

# Hand-held instruments - software

## Operation for GMH 3xxx / GMH 5xxx - logger device

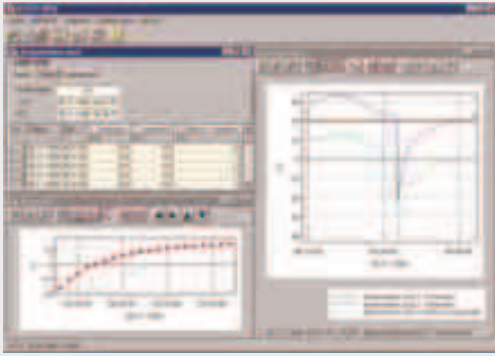

### GSOFT 3050

Windows-software for the setting, data read-out and printing of all data stored by devices of the GMH3xxx- and GMH5xxx-series with logger.

#### General advice:

With GSOFT3050 you are able to operate the logger function of the GMH3000- and GMH5000 hand-held series. The logger recordings can be started, stopped, read in and displayed. It is also possible to operate several instruments simultaneously and to display their data in mutual diagrams. Data will be read via the serial interfaces 'COM 1' - 'COM 255' of your PC and an interface adapter (GRS 3100, GRS 3105, USB 3100 N ...).

Software is multilingual, the language can be selected simply in the programme. Executable with Windows 98, Me, NT, 2000, XP, Vista and 7.

**The GSOFT3050 offers, among others, the following functions:**


- **Display of the GMH-information**
- **Setting of the alarm function** for GMH3xxx and GMH5xxx devices.
- **Operation of the logger function**  
simple selection of the logger function (cyclic or manual), setting of cycle time, logger recording start and stop, read-out of logger data.
- **Diagram display of logger data**  
The logger data can be displayed in form of a diagram. It is possible to display various measuring sequences in one diagram. The diagram offers the following functions:
  - display including real-time axis, zooming of display view
  - display of legend can be switched on/off
  - marking of measuring points can be switched on/off
  - a new/existing measuring sequence can be added/deleted at any time
- **Logger data print-out**  
Data can be printed as tables (complete measuring sequence or limited area) or as diagram (in accordance with the current diagram window).
- **Memorizing of logger data**  
The logger data can be saved in files and, therefore, called up again at any given time without a connected device.
- **Export of logger data to ASCII (text) file format**
- **Memorizing of windows**  
Data and diagram windows can be placed at any desired. The setup of the windows can be stored as 'view'.

### GMH 3000.DLL

Windows-functional library for interface communication.

To integrate all GMH 3xxx device functions in own Windows programmes, i.e. LabView.

## Long-time monitoring - Recording - Monitoring

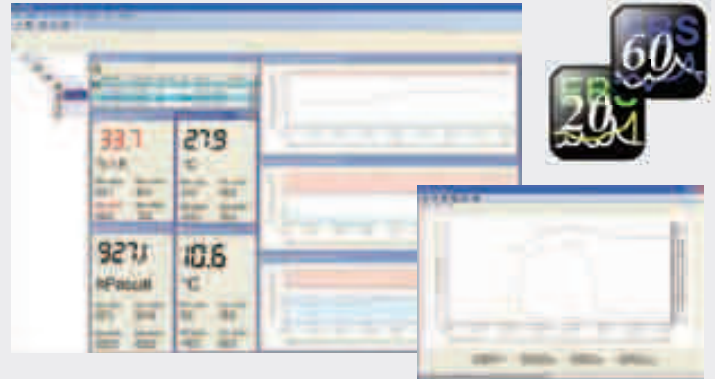

### EBS 20M

(20-Channel Measurement Data Logging)

### EBS 60M

(60-Channel Measurement Data Logging)

This software makes up a low-price and comfortable multi-channel acquisition program for measuring data. The program is suitable for recording, monitoring, visualization and documentation.

#### Field of application:

- On-site recording
- Process and system control, monitoring of climate and buildings
- Real time monitoring of measuring data  
i.e for data evaluation and logging for cost listings, overview of consumption, optimisation of processes, and other statistics

#### Highlight:

- Simultaneous use of several serial interfaces
- Simultaneous use of different serial converters
- Quick and easy installation
- Freely scaleable diagrams and alarm limits
- Visualization of actual measurements values
- Trusted data storage via SQL database
- Data export

#### Moduls:

- Large-digit display
- Diagram display
- Table display
- Visualization of alarm limits
- Visualization of all recorded datas in one diagram

#### Measuring Cycle:

depending on the number of channels: 500ms to 10s

#### System Requirements:

Windows XP, Windows Vista, Windows 7

Simultaneous use of different serial Bus-Systems:  
EASYBus, GMH handheld devices, GDUSB 1000

## ProfiLab-Expert 4.0

The software ProfiLab-Expert allows you to develop your own digital or analog measuring technology requirement.



It doesn't matter if you want to create analog measurements or digital controls - you can realize it all. And for all this you don't have to write a single program-line!

ProfiLab-Expert supports our devices of the GMH3xxx-Serie with serial interface, GCO100, GFTB100/GRS, as well as all EASYBus-devices. Every device will be displayed in your project like a normal component. You only have to connect his inputs and outputs.


#### **Compiler inclusive !**

ProfiLab-Expert is equipped with an integrated compiler. The compiler can create executable files for stand-alone applications that run on systems without ProfiLab-Expert.

The distribution of these compiled applications is unlimited, so ProfiLab-Expert become a complete and professional developers system.

Software executable with: Windows 98, Me, NT, 2000 and XP.

# Display / Controller

	Dimensions					Measuring input							Page
	24 x 48	48 x 96	33 x 75	48 x 48	Special size	Normalized signal	Temperature (Pt100 / Pt1000)	Temperature (Thermocouples)	Temperature (NTC, PTC)	Frequency	Universal input	 - Protection	

## DISPLAY

GIA .. N	✓					✓							60
GIA .. N - ex	✓					✓						✓	60
GIA 2448	✓					✓							61
GTH2448/1	✓						✓						61
GTH2448/2 .. /3	✓						✓						61
GTH2428/4 .. /5	✓						✓						61
GTH 83 EG		✓						✓					64
GTH1150 EG		✓						✓					64
GIA 2000		✓				✓	✓	✓		✓	✓		65
GIA 0420 VO(T)					✓	✓							72
GIA 0420 VOT - ex					✓	✓						✓	72
GIA 0420 WKT					✓	✓							72
GIA 0420 WKT - ex					✓	✓						✓	72

## CONTROLLER

GIA 20 EB	✓										✓		62
GIR 230 ..	✓					✓	✓	✓	✓	✓			63
GIR 230 DIF	✓					✓	✓		✓				63
GIR 2002		✓				✓	✓	✓		✓	✓		66
GIR 2002 PID		✓				✓	✓	✓		✓	✓		66
GIR 2002 .. SW		✓				✓	✓	✓		✓	✓		68
GIR 2002 NS / DIF ..		✓				✓							69
GIR 2000 Pt ..		✓					✓						69
R 38			✓				✓	✓	✓				70
K 31 / K 32			✓			✓	✓	✓	✓				70
TLK 43				✓		✓	✓	✓	✓		✓		71
K 48				✓		✓	✓	✓	✓				71
GRA .. VO					✓	✓							73
GRA .. WK					✓	✓							73






## µP-display with freely adjustable scale



# GIA 0420 N / GIA 010 N

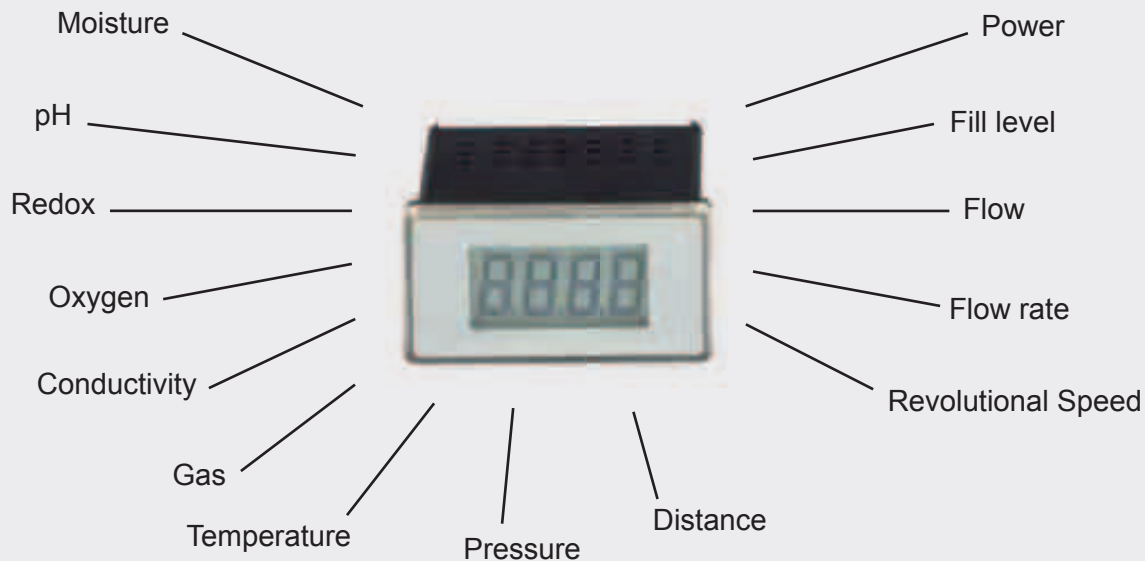

### GIA 0420 N

Display without auxiliary energy, input 4-20 mA

### GIA 010 N

Display, input 0-10 V

### GIA 0420 N - ex



Display, input 4-20 mA, with EX-protection for all potentially explosive atmospheres

**Ex qualification:** II 2G Ex ia/ib IIC/IIB T4

(Further Information please refer to our Homepage [www.greisinger.de](http://www.greisinger.de))

### GIA 010 N - ex



Display, input 0-10 V, with EX-protection for all potentially explosive atmospheres

**Ex qualification:** II 2G Ex ia/ib IIC/IIB T4

(Further Information please refer to our Homepage [www.greisinger.de](http://www.greisinger.de))

- time-saving on-site scaling without any additional auxiliary modules
- simple device identification by means of insertion film.
- optimum operational reliability due to integrated self-diagnosis function and watchdog system.
- large display range from -1999 to +9999 digits
- high accuracy combined with minimum temperature drift due to integrated self-calibration
- smallest housing dimensions possible
- monitoring of probe damage, probe short-circuit, values no longer within measuring range.
- software filter for clear display even in case of encoder signal interference (can be switched on and off)

### Specification:

	GIA 0420 N ..	GIA 010 N ..
<b>Input signal:</b>	4 ... 20 mA 2-wire	0 ... 10 V 3-wire
<b>Voltage load:</b>	approx. 3,5 V	-
<b>Input resistance:</b>	-	approx. 100 kOhm
<b>max. input:</b>	25 mA	15 V
<b>Power supply:</b>	-	12 - 28 V DC
<b>Power consumption:</b>	aus Stromschleife	< 10 mA
<b>Display:</b>	LCD display, approx. 10 mm high	
<b>Display range:</b>	-1999 bis +9999	
<b>Decimal point:</b>	any position selectable	
<b>Scaling:</b>	scale freely adjustable via 3 keys at the back side of the unit	
<b>Accuracy:</b>	< 0,2% FS ±1 Digit (at 25 °C)	
<b>Temperature drift:</b>	< 100 ppm / K	
<b>Meas. rate:</b>	approx. 5 measurements / sec.	
<b>Filter:</b>	adjustable: 0,1 ... 2,0; off	
<b>Storage:</b>	min- / max-value memory	
<b>Switching output:</b>	electrically isolated open collector	
<b>Switching capacity:</b>	28V DC / 50 mA	
<b>Working temp.:</b>	-20 to 50 °C	
<b>Storage temp.:</b>	-20 to 70 °C	
<b>Electric connection:</b>		
GIA 0420 N ..	2 x 2-pin screw-type/plug-in terminal max. terminal range up to 1.5 mm <sup>2</sup>	
GIA 010 N ..	1 x 2-pin., 1 x 3-in. screw-type/plug-in terminal, max. terminal range up to 1.5 mm <sup>2</sup>	
<b>Housing:</b>	fibre-reinforced Noryl	
<b>Front screen:</b>	polycarbonate	
<b>Dimensions:</b>	24 x 48 mm (H x W, front dimensions)	
panel cutout:	21.7 <sup>+0.5</sup> x 45 <sup>+0.5</sup> mm (H x W)	
mounting depth:	approx. 65 mm incl. terminal	
<b>Protection rating:</b>	IP54 (IP65 by means of additional optional silicone O-rings, <b>GGD2448SET</b> )	



# Universal LowCost-LED-Display for Standard Signals and Temperature



**Digital display**  
for standard signals

**GIA 2448** (for self-adjustment)

**GIA 2448 WE** <sup>1)</sup>  
(settings and calibrations by our works)

1) Please specify as follows upon order: Input signal, scaling (lower and upper limits), decimal point and supply voltage.

(Order to read e.g. GIA2448WE: 4-20mA, 4mA=-50.0, 20mA = 100.0, 12VDC)

## Specification

<b>Meas. ranges:</b>	0-20 V, 0-10 V, 0-2 V, 0-1 V, 0-200 mV, 0-20 mA and 4-20 mA. (select via soldering jumpers)
<b>Display range:</b>	-1999 ... +1999 digit (adjustable via soldering jumpers and potentiometer)
<b>Decimal point:</b>	any position by means of soldering jumpers (soldering jumpers accessible after removal of front panel)
<b>Accuracy:</b>	±0.2% ±1 digit (at nominal temperature = 25°C)
<b>Scan rate:</b>	approx. 3 measurements / sec.
<b>Display:</b>	3½-digit, red 10 mm high LED display
<b>Working temperature:</b>	0 to 50 °C (permissible ambient temperature)
<b>Relative humidity:</b>	5 to 95 %RH (non-condensing)
<b>Storage temperature:</b>	-20 to 70 °C
<b>Voltage supply:</b>	8 - 20 V DC or 18 - 29 V DC (Standard) (set via soldering jumper)
<b>Current supply:</b>	max. 20 mA
<b>Housing:</b>	glass fibre reinforced Noryl, front panel PC.
<b>Dimensions:</b>	24 x 48 mm (H x W) (front frame)
<b>Mounting depth:</b>	approx. 65 mm (incl. screw-type/plug-in terminal)
<b>Panel mounting:</b>	with VA-spring clamp. allowed panel thicknesses from 1 to approx. 10 mm
<b>Panel cut-out:</b>	21.7 <sup>+0.5</sup> x 45 <sup>+0.5</sup> mm (H x W).
<b>Connection terminal:</b>	4-pin screw-type/plug-in terminal for wire cross sections from 0.14 to 1.5 mm <sup>2</sup>
<b>Noise immunity (EMC):</b>	meets EN50081-1 and EN50082-2 requirements, additional fault: <1%
<b>IP rating:</b>	front side IP54 (with optional O-rings IP65).

## Option

- **VAC** voltage supply 8-20 V AC or 18 - 29 V AC  
set via soldering jumper

## Accessories

- GGD 2448 SET** optional O-rings for IP65 (2 pieces)
  - GNG 220/2-12V** power supply for GIA 2448 and GTH 2448 (Input: 230 V<sub>AC</sub> ; output: 2 x 12 V<sub>DC</sub> regulated, 30 mA each)
  - GNG 12/24** power supply (Input: 12 V<sub>DC</sub> ; output: 24 V<sub>DC</sub> electrically isolated)
  - GNG 24/24** power supply (Input: 24 V<sub>DC</sub> ; output: 24 V<sub>DC</sub> electrically isolated)
- for additional accessories, transmitter, probes p.r.t.p. 78-79, 100-121, 123-137



**Digital thermometer**  
for NiCr-Ni, Pt100 or Pt1000

**GTH 2448/1** (NiCr-Ni)

**GTH 2448/2** (Pt100, 1°C)

**GTH 2448/3** (Pt100, 0.1°C)

**GTH 2448/4** (Pt1000, 1°C)

**GTH 2448/5** (Pt1000, 0.1°C)


## Specification

<b>Measuring ranges, Resolution:</b>	
<b>GTH 2448/1:</b>	- 50 ... +1150 °C (NiCr-Ni)
<b>GTH 2448/2:</b>	-200 ... + 650 °C (Pt100, 2-wire)
<b>GTH 2448/3:</b>	-60,0 ... +199.9 °C (Pt100, 2-wire)
<b>GTH 2448/4:</b>	-200 ... + 650 °C (Pt1000, 2-wire)
<b>GTH 2448/5:</b>	-60,0 ... +199.9 °C (Pt1000, 2-wire)
<b>Accuracy:</b> (at nominal temperature = 25°C)	
<b>NiCr-Ni:</b>	±1% ±1 digit (from -20...+550°C and 920...1150°C) ±1.5% ±1 digit (from 550... 920°C)
<b>Pt100, Pt1000:</b>	±0.5°C ±1 digit or ±1°C ±1 digit
<b>Offset compensation:</b> (only for Pt100 and Pt1000) The zero point offset of the sensor (e.g. due to long cables) can be compensated for by means of the spindle trimmer on the backside of the device.	
<b>Display:</b>	3½-digit, red 10 mm high LED display
<b>Scan rate:</b>	approx. 3 measurements / sec.
<b>Working temperature:</b>	0 to 50 °C (permissible ambient temperature)
<b>Relative humidity:</b>	5 to 95 %RH (non-condensing)
<b>Storage temperature:</b>	-20 to 70 °C
<b>Voltage supply:</b>	8 - 20 V DC or 18 - 29 V DC (Standard) (set via soldering jumper)
<b>Current supply:</b>	max. 20 mA
<b>Housing:</b>	glass fibre reinforced Noryl, front panel PC.
<b>Dimensions:</b>	24 x 48 mm (H x W) (front frame)
<b>Mounting depth:</b>	approx. 65 mm (incl. screw-type/plug-in terminal)
<b>Panel mounting:</b>	with VA-spring clamp. allowed panel thicknesses from 1 to approx. 10 mm
<b>Panel cut-out:</b>	21.7 <sup>+0.5</sup> x 45 <sup>+0.5</sup> mm (H x W).
<b>Connection terminal:</b>	4-pin screw-type/plug-in terminal for wire cross sections from 0.14 bis 1.5 mm <sup>2</sup>
<b>IP rating:</b>	front side IP54 (with optional O-rings IP65).

## System solution - complete packages:

### KFZ 2000

Exhaust gas temperature set for measurement of exhaust gas temperatures up to 1000 °C in motor vehicles. The Set consists of:



- **GTH 2448/1** NiCr-Ni thermometer with additional over-voltage protection
- **GTF 101-5/30150 / NIMONIC** temperature probe with jacket material: Nimonic 75 (view p.r.t. page 129)  
Cable length = 3 m (extended cable against upcharge available)
- **GKV 4** clamping ring screw connection (p.r.t. p. 136)

# Universal Display and Regulating Device



# GIA 20 EB

easy operability - high accuracy - economy-price



- Universal inputs for normalized signals, frequency, Pt100, Pt1000 and thermocouples
- 2 integrated switching outputs
- Configurable as display or controller (5 switching functions)
- Quick regulating and controlling stage
- extensive self-monitoring and diagnostic system
- Serial interface (max. 240 devices can be combined)
- Limit functions, digital filter, min-/max value memory
- Alarm delay selectable

Option: Frontpanel with push buttons  
(frontpanel without buttons included in delivery)

## Specification

**Measuring input:** universal input for

- **Normalized signal:** 4-20 mA, 0-20 mA, 0-1 V, 0-2 V, 0-10 V, 0-50 mV
- **Resistance thermometer:** Pt100 (3-wire), Pt1000 (2-wire)
- **Thermocouples:** types J, K, N, S, T
- **Frequency, Rotational speed:** TTL-signal, switching contact
- **Counter up / down:** TTL-signal, switching contact
- **Serial interface**

**Measuring rate:** approx. 100 meas. / sec. (for norm. signal) resp. approx. 4 meas. / sec. (for temperature and frequency)

**Measuring resp. display ranges, resolution:**

**Temperature:** (display unit selectable: °C or °F)

**Pt100:** -200 ... +850°C or -50.0 ... +200.0°C

**Pt1000:** -200 ... +850°C

**type J:** -170 ... +950°C      **type K:** -270 ... +1350°C

**type N:** -270 ... +1300°C      **type S:** -50 ... +1750°C

**type T:** -270 ... +400°C

**Norm. signals:** -1999 ... 9999 digit, scale freely adjustable

- **recommended range:** ≤ 2000 digit

**Frequency:** 0.000 Hz ... 10 kHz, display freely scaleable

**Rotational speed:** 0.000 U/min ... 9999 U/min,  
selectable prescaler: 1-1000

**Counter up/down:** *countvalue remains on power loss*  
0 ... 9999 (10 Mio. with prescaler),  
pulse frequency: ≤ 10kHz  
selectable prescaler: 1-1000

**Serial interface:** Displaying and controlling from values coming via the serial interface.

**Accuracy:** (at nominal temperature = 25°C)

- **Norm. signal:** < 0.2 % f.s. ±1digit (at 0-50mV: < 0.3% f.s. ±1digit)
- **Resistance thermometer:** < 0.5 % f.s. ±1digit
- **Thermocouples:** < 0.3 % f.s. ±1digit (at type S: < 0.5% f.s. ±1digit)
- **Point of comparison:** ± 1 °C
- **Frequency, rotational speed, counter:** < 0.1 % f.s. ±1digit

**Outputs:** 2 switching outputs, not electrically isolated

**Switching behavior:** Low-Side, High-Side or Push-Pull (selectable)

**Connection data:** Low-Side: 28V/1A; High-Side: Ub/200mA

**Controller state:** 2-point, 3-point, 2-point with alarm,  
min/max alarm to 1 output, min/max alarm to 2 outputs

**Swirching point, hysteresis:** freely adjustable

**Response time:** ≤ 20 msec. at normalized signals  
≤ 0.3 sec. at temperature and frequency

**Display:** approx. 10 mm high, 4-digit red LED-display

**Service:** with 3 push-buttons (after disassembly of the frontpanel).

Option: FS3T, frontpanel with 3 push-buttons for comfortable configuration.

*Trouble-free replacement is possible (refer accessories)*

**Min-/max-value memory:** the max- and min value will be stored.

**Interface:** serial interface, elect. isolated, EASYBus compatible

**Miscellaneous:** permanent self-monitoring, digital filter function,  
measuring range boundary (limit)

**Voltage supply:** 9 to 28 V DC (standard)

Option: elec. insulated voltage supply 11-14V or 22-27V

**Power consumption:** max. 30 mA (without outputs)

**Nominal temperature:** 25 °C

**Operating temperature:** -20 to +50 °C

**Relative humidity:** 0 to 80 %RH (non condensing)

**Storage temperature:** -30 to +70 °C

**Housing:** glass fibre reinforced Noryl, front panel PC

Dimensions: 24 x 48 mm (front frame).

Mounting depth: approx. 65 mm (incl. screw-type/plug-in terminal)

**Panel mounting:** with VA-spring clamp.

Allowed panel thicknesses from 1 to approx. 10 mm.

Panel cut-out: 21.7+0.5 x 45+0.5 mm (H x W)

**Connection terminal:** screw-type/plug-in terminal: 2-pin for interface  
and 9-pin for outhter connections.

For wire cross sections from 0.14 to 1.5 mm<sup>2</sup>.

**IP rating:** front side IP54, with optional r-rings IP65

**Noise immunity (EMC):** EN61326 (appendix A, class B)

## Options (upon upcharge)

- **IS12** type with insulated power supply: 11-14V

- **IS24** type with insulated power supply: 22-27V

## Special design types

### GIA 20 EB / PK

**Universal display and regulating device with individual programmable linearization characteristic**

Even heavily bent sensor characteristics/value curves can be approximated by a straightened curve with **30** freely programmable linearization points.

The adjustment to the measurement is done via the integrated interface with the (gratis) configuration software. For the connection with a PC, an additional serial converter EBW 1 or EBW 3 will be needed. Therefore only the input values (in mA, V, Ω or Hz) and the corresponding displayed values have to be entered.

*For detailed information please refer to our homepage [www.greisinger.de](http://www.greisinger.de)*

## Accessories

**GGD2448SET** O-rings for device mountig IP65 (2 pieces)

**FS3T** Frontpanel with 3 push-buttons

For comfortable configuration, for adjustments at variable switching points, calling of min- and max-values etc.

**GNR10** Power supply and relay module for one GIA20EB (p.r.t. page 75)

(Input: 230VAC, Power supply for device + transducer, 2 relay outputs)

**Temperature probes**

p.r.t. page 123 - 137

**Transducer**

p.r.t. page 100 - 121

for other accessories p.r.t. page 78/79, 97/98

# The Displaying and Regulating Device for 230 V

Front  
24 x 48



# GIR 230 ...

- 5 input executions for choice:
  - normalized signal: 4-20mA, 0-20mA, 0-10V
  - resistor: Pt100 (3-wire), Pt1000 (2-wire)
  - thermo couple: type J, K, N, S, T and 0-50mV
  - frequency
  - NTC
- 2 relay outputs and 1 switching output NPN (GIR 230 NTC: 1 relay output)
- configurable as display or controller (5 switching functions)
- extensive self-monitoring and diagnostic system
- min/max value memory, limit functions, digital filter

## GIR 230 NS (normalized signal input)

Controller with meas. input for normalized signal (4-20 mA, 0-20 mA, 0-10 V)

## GIR 230 Pt (resistance input)

Controller with measuring input for Pt100 and Pt1000

## GIR 230 TC (thermo couple input)

Controller with meas. input for thermo couple and 0-50 mV

## GIR 230 FR (frequency input)

Controller with measuring input for frequency

## GIR 230 NTC

Controller with measuring input for NTC and only 1 relay output

### Version

#### GIR 230 NS:

**Measuring input:** 4-20mA, 0-20mA, 0-10V  
**Display range:** -1999 ... 9999 digit, scale freely adjustable  
**recommended range:** ≤ 2000 digit  
**Accuracy:** < 0.2 % f.s. ±1 digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 100 measurings / sec.

#### GIR 230 Pt:

**Measuring input:** Pt100 (3-wire), Pt1000 (2-wire)  
**Measuring ranges, resolution:**  
**Pt100:** -200 ... +850°C resp. -50.0 ... +200.0°C  
**Pt1000:** -200 ... +850°C  
**Accuracy:** < 0.5 % f.s. ±1 digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 4 measurings / sec.

#### GIR 230 TC:

**Measuring input:** types J, K, N, S, T and 0-50 mV  
**Measuring ranges, resolution:**  
**type J:** -170 ... +950°C      **type K:** -270 ... +1350°C  
**type N:** -270 ... +1300°C      **type S:** -50 ... +1750°C  
**type T:** -270 ... +400°C  
**Accuracy:** < 0.3 % f.s. ±1 digit (type S: < 0.5 % f.s. ±1 digit) (at 25°C)  
**Point of comparison:** ± 1 °C  
**Measuring rate:** approx. 4 measurings / sec.

#### GIR 230 FR:

**Measuring input:** frequency (TTL-signal)  
**Display range:** -1999 ... 9999 digit, freely scaleable  
**Accuracy:** < 0.2 % f.s. ±1 digit (at nominal temperature = 25°C)  
**Frequency measuring:** 0.000 Hz ... 10 kHz  
**Rotational speed:** 0.000 U/min ... 9999 U/min, selectable prescaler (1-1000)  
**Counter up/down:** 0 ... 9999 (~10.000.000 with prescaler)

#### GIR 230 NTC:

**Measuring input:** NTC (2-wire)  
**Measuring ranges:** -40.0 ... +120.0°C  
**Accuracy:** < 0.5 % f.s. ±1digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 4 measurings / sec.

### Suitable temperature probes

**Temperature probes (Pt100/1000)** p.r.t. page 123/124, 131-135

**Temperature probes (type K, S, N)** p.r.t. page 125/129, 131-135

**GTF230S** ntc-temperature probe, -40 ... +120°C  
 sensor sleeve made of st. steel, Ø 5 x 50 mm, approx. 1m silicone-cable  
**Option: longer probe cable (silicone)** upcharge each m:

## GIR 230 Pt1000 / DIF

Difference controller with 2 measuring inputs for Pt1000

## GIR 230 NTC / DIF

Difference controller with 2 measuring inputs for NTC

## GIR 230 NS / DIF - ...

Difference controller with 2 measuring inputs for 4-20 mA, 0-20 mA or 0-10 V

### Version

#### GIR 230 Pt1000 / DIF, GIR 230 NTC / DIF:

**Measuring inputs:** 2 x Pt1000 (2-wire) resp. 2 x NTC  
**Meas. ranges, resolution:** **Pt1000:** -200 ... +850°C, 1°C  
**NTC:** -40.0 ... +120.0°C, 0.1°C

**Display:** difference temperature sensor1 - sensor2  
**Accuracy:** < 0.5 % f.s. ±1digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 4 measurings / sec.

#### GIR 230 NS / DIF - 420mA, ... - 020mA, ... - 010V:

**Measuring inputs:** (2 x) 4-20 mA, (2 x) 0-20 mA or (2 x) 0-10 V  
**specify required input signals by order!**  
**Display range:** -1999 ... 9999 digit, scale freely adjustable  
**recommended range:** ≤ 2000 digit  
**Accuracy:** < 0.2 % f.s. ±1 digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 100 measurings / sec.

### General Specifications

#### Outputs:

**Relay output:** 2 (1) closing contacts (GIR 230 NTC: 1 relay output), 230V~ switching, switching power: 5A, 230VAC  
**Alarm output:** NPN, open collector, switching power: 30mA, max. 28V  
**Controller states:** 2-point, 3-point\*, 2-point with alarm, min/max alarm to 1 output, min/max alarm to 2 outputs\* (\* = not available at GIR230NTC)  
**Switching points, hysteresis, alarm points:** freely selectable

#### Others:

**Display:** approx. 10 mm high, 4-digit red LED-display  
**Operating conditions:** -20 to +50 °C, 0 to 80 %RH (non condensing)  
**Power supply:** 230V, 50/60Hz, approx. 2 VA  
**Housing:** glass fibre reinforced Noryl, front panel PC  
 Dimensions: 24 x 48 mm (front frame).  
 Mounting depth: approx. 65 mm (incl. screw-type/plug-in terminal)  
**Panel mounting:** with VA-spring clamp.  
 Allowed panel thicknesses from 1 to approx. 10 mm.  
 Panel cut-out: 21.7+0.5 x 45+0.5 mm (H x W)  
**Connection terminal:** screw-type/plug-in terminal:  
 4-pin (...NTC: 3-pin) for power supply and relay outputs and 4-pin (...NTC: 3-pin) for measuring input and alarm output  
 For wire cross selections from 0.14 to 1.5 mm<sup>2</sup>.  
**IP rating:** front side IP54 (IP65 upon request)  
**Noise immunity (EMC):** EN61326 (appendix A, class B)

### Option (upcharge)

- **24V** GIR with power supply 12 - 28 V DC  
**Outputs:** 2 (1) relay outputs, +Ub switching

### Accessories

**GGD2448SET** O-rings for device mounting IP65 (2 pieces)

**Transducer** p.r.t. page 100 - 121

for other accessories p.r.t. page 78/79



# Panel Instrument for Temperature



Digital thermometer  
for silicon sensors KTY 83



Digital thermometer  
for thermocouples NiCr-Ni (type "K")



## GTH 83 EG without sensor

-50,0 up to +150,0 °C

### Specification

**Measuring range:** -50.0 to 150.0 °C  
**Resolution:** 0.1 °C  
**Sensor:** KTY 83-110 (please order separately),  
*Additional zero point offset possible via spindle trimmer at back side of device.*

**Accuracy (display device):** (at nominal temperature = 25°C)  
 $\leq 0.5^\circ\text{C} \pm 1$  digit (from -10 to +120°C)

**Display:** approx. 13mm high, 3½-digit, red LED-display

**Scan rate:** approx. 3 measurements / sec.

**Working temperature:** 0 to 50 °C

**Relative humidity:** 0 to 80 %RH (non-condensing)

**Storage temperature:** -20 to 70 °C

**Power supply:** 230V 50/60Hz

**Option:** 12/24/115V AC  
 12/24V DC

**Housing:** standard rack-type housing, 48 x 96 x 100mm (H x W x D)

**IP rating:** front side IP54 (with optional O-rings IP65).

**Panel cutout:** 43 x 90.5 (H x W)

**Connection terminals:** screw-type/plug-in terminals,  
 max. terminal range 1.5 mm<sup>2</sup>

### Noise immunity (EMC):

The GTH83EG is conforming to the regulations determined by the Council for the Approximation of the Legislation amongst the Member Countries concerning EMC (2004/108/EG).

The device meets EN50081-1 and EN50082-2 requirements.  
 additional error: <1%

### Options (against upcharge)

**12VDC: Power supply: 12VDC**

**24VDC: Power supply: 24VDC**

**12VAC: Power supply: 12VAC**

**24VAC: Power supply: 24VAC**

**115VAC: Power supply: 115VAC**

### Accessories

**GGD 4896** additional sealing for panel mounting IP65

### Suitable sensors

**GMF 11/180** immersion probe

**GMF 30/180** immersion, air probe

**GMF 15/180** screw-type probe

Other probes or custom-built sensors available. (p.r.t. page 130).

## GTH 1150 EG without sensor

-50 up to +1150 °C

### Specification

**Measuring range:** -50 to 1150 °C

**Resolution:** 1 °C

**Sensor:** NiCr-Ni (type K) (please order separately)  
*Additional zero point offset possible via spindle trimmer at back side of device.*

**Accuracy (display device):** (at nominal temperature = 25°C)  
 $< 1\% \pm 1$  digit (from -20 to +550°C and 920 up to 1150°C);  
 $< 1.5\% \pm 1$  digit (from 550 to 920°C),  
 from -50 to -20°C acc. to correction table

**Display:** approx. 13mm high, 3½-digit, red LED-display

**Scan rate:** approx. 3 measurements / sec.

**Working temperature:** 0 to 50 °C

**Relative humidity:** 0 to 80 %RH (non-condensing)

**Storage temperature:** -20 to 70 °C

**Power supply:** 230V 50/60Hz

**Option:** 12/24/115V AC  
 12/24V DC

**Housing:** standard rack-type housing, 48 x 96 x 100mm (H x W x D)

**IP rating:** front side IP54 (with optional O-rings IP65).

**Panel cutout:** 43 x 90.5 (H x W)

**Conn. terminals:** screw-type/plug-in terminals,  
 max. terminal range 1.5 mm<sup>2</sup>

### Noise immunity (EMC):

The GTH1150EG is conforming to the regulations determined by the Council for the Approximation of the Legislation amongst the Member Countries concerning EMC (2004/108/EG). The device meets EN50081-1 and EN50082-1.  
 additional error: <1%

### Options (against upcharge)

**12VDC: Power supply: 12VDC**

**24VDC: Power supply: 24VDC**

**12VAC: Power supply: 12VAC**

**24VAC: Power supply: 24VAC**

**115VAC: Power supply: 115VAC**

### Accessories

**GGD 4896** additional sealing for panel mounting IP65

### Suitable sensors

Order all NiCr-Ni (type "K") - sensors without plug but with ferrule.  
 (p.r.t. pages 125 - 129, 134 - 135)

Custom-built sensors available. (p.r.t. pages 132 and 133).



# Universal Displaying Device

# GIA 2000

easy operability - high accuracy - economic price

Temperature display, pressure control, tachometer, flow meter, etc.



- Universal inputs for normalized signals, frequency, Pt100, Pt1000 and thermocouples, freely adjustable
- integrated isolated power supply for meas. transducer (24V / 22mA)
- extensive self-monitoring and diagnostic system
- Serial interface - EASYBus (max. 240 devices can be combined)
- Limit functions, digital filter, min-/max value memory

## Specification

**Measuring input:** universal input (freely adjustable) for  
 - **Normalized signal:** 4-20mA, 0-20mA, 0-1V, 0-2V, 0-10V, 0-50mV  
 - **Resistance thermometer:** Pt100 (3-wire), Pt1000 (2-wire)  
 - **Thermocouples:** types J, K, N, S, T  
 - **Frequency:** TTL-signal, switching contact  
 - **Flow, Rotational speed:** TTL-signal, switching contact  
 - **Counter up / down:** TTL-signal, switching contact  
 - **Serial interface**

**Measuring rate:** approx. 100 meas. / sec. (for norm. signal and frequency) resp. approx. 4 meas. / sec. (for temperature)

### Measuring resp. display ranges, resolution:

**Temperature:** (display unit selectable: °C or °F)  
**Pt100:** -200 ... + 850°C or - 50.0 ... +200.0°C  
**Pt1000:** -200 ... + 850°C  
**type J:** -170 ... + 950°C or - 70.0 ... +300.0°C  
**type K:** -270 ... +1372°C or - 70.0 ... +250.0°C  
**type N:** -270 ... +1350°C or -100.0 ... +300.0°C  
**type S:** - 50 ... +1750°C  
**type T:** -270 ... + 400°C or - 70.0 ... +200.0°C

**Norm. signals:** -1999 ... 9999 digit, scale freely adjustable  
 - **recommended range:** ≤ 2000 digit

**Frequency:** 0.000 Hz ... 10 kHz, display freely scaleable

**Rotational speed:** 0.000 ... 9999 U/min, selectable prescaler: 1-1000

**Flow:** 0 ... 9999 l/s, 0 ... 9999 l/min, 0 ... 9999 l/h

**Counter up/down:** counter value remains on power loss  
 0 ... 9999 (10 Mio. with prescaler),  
 pulse frequency: ≤ 10kHz

**Serial interface:** Displaying and controlling from values coming via the serial interface.

### Accuracy: (at nominal temperature = 25°C)

- **Norm. signal:** < 0.2 % f.s. ±1digit (at 0-50mV: < 0.3% f.s. ±1digit)
- **Resistance thermometer:** < 0.3 % f.s. ±1digit
- **Thermocouples:** < 0.3 % f.s. ±1digit (at type S: < 0.5% f.s. ±1digit)
- **Point of comparison:** ± 1 °C
- **Frequency, rotational speed, counter:** < 0.1 % f.s. ±1digit

### Analog output: (option)

freely scaleable analogue output 0-20mA / 4-20mA or 0-10V

**Display:** approx. 13 mm high, 4-digit red LED-display

**Min-/max-value memory:** the max- and min value will be stored.

**Interface:** serial interface, elect. isolated, EASYBus compatible

**Power supply for sensor:** integrated isolated power supply for measuring transducer: 24 V DC ±5%, 22mA (for dc-supply 18 V DC)

**Miscellaneous:** permanent self-monitoring, digital filter function, measuring range boundary (limit)

**Voltage supply:** 230 V AC, 50/60 Hz (standard)  
 optionally other supply voltages are possible

**Power consumption:** approx. 5 VA  
**Operating temperature:** -20 to +50 °C  
**Relative humidity:** 0 to 80 %RH (non condensing)  
**Storage temperature:** -30 to +70 °C  
**Housing:** standard rack type housing 48 x 96 mm (front frame)  
 installation depth: approx. 115 mm (incl. screw-type/plug-in terminals)  
**Panel mounting:** by fixing clamps  
 Panel cutout: 43.0<sup>+0.5</sup> x 90.5<sup>+0.5</sup> mm (H x W)  
**Electrical connection:** via screw-type/plug-in terminals  
 cable diameters from 0.14 to 1.5 mm<sup>2</sup>.  
**Protection class:** front side IP54, with optional sealing IP65  
**Electromagnetic immunity (EMC):** EN61326 (appendix A, class B)

## Options (upon upcharge)

- **12VDC** voltage supply = 12 VDC (11-14V) <sup>1)</sup>
  - **24VDC** voltage supply = 24 VDC (22-27V) <sup>1)</sup>
  - **24VAC** voltage supply = 24 VAC ±5%
  - **115VAC** voltage supply = 115 VAC ±5%
  - **AAG020** analog output 0-20 mA, 4-20 mA (reversible) <sup>1)</sup>
  - **AAG010** analog output 0 - 10 V <sup>1)</sup>
- 1) For analog output with option 12VDC o. 24VDC

## Accessories

**GGD 4896** additional sealing for panel mounting IP65

**EAK 36** Unit stickers (black with white text)  
 for 36 different units for lettering of display devices.



**EBW 1** interface converter EASYBus => RS232 (p.r.t. page 96)

**EBS 20M** software for recording and archiving  
 of the measuring values (p.r.t. page 58).

**Temperature probes**

**p.r.t. page 123 - 137**

**for other accessories p.r.t. page 78/79, 97/98**

Front  
48 x 96

# Universal Displaying and Regulating Device

## GIR 2002

On/Off - control mode

## GIR 2002 PID with PID - control mode

*easy operability - high accuracy - economic price*

E.A.S.Y. Bus  
- Modul



### Highlights

- universal input for normalized signals, frequency, Pt100, Pt1000, thermocouple
- 2 relay switching outputs
- 1 analog output (0(4)-20mA or 0-10V) (optional)
- 5 programmable switching modes
- electrical isolated power supply for a transmitter (24V / 22mA)
- serial interface, bus operation

### Additional at GIR 2002 PID

- P, I, PI, PD or PID control mode
- motorised valve control
- continuous regulating output (optional)

### Applications

- process regulating
- temperature controller
- Pressure monitoring
- rotation speed display
- flow counter
- etc.

### General

The universal controller **GIR 2002** is the ideal device for simple control systems (on/off switching, relay outputs, ...), because of its compact construction and its high ease of use.

The **GIR 2002 PID** (basic version) supplies one control output for a 2-point-control the types of control **P, I, PI, PD** or **PID** and a second control output for on/off switching.

The device can also be configured as a **3-point motorized valve controller** or as controller with **continuous output** (optionally).

### Specification:

Measuring input	Measuring / display ranges	Accuracy (at nominal temperature)	Measuring rate
<b>Thermocouples</b>			
FeCu-Ni type J IEC 584	-70,0 ... +300,0°C or -170 ... 950°C	< 0,3 % FS ±1 digit *	approx. 4 meas. / sec.
NiCr-Ni type K IEC 584	-70,0 ... +250,0°C or -270 ... 1372°C	< 0,3 % FS ±1 digit *	
NiCrSi-NiSi type N IEC 584	-100,0 ... +300,0°C or -270 ... 1350°C	< 0,3 % FS ±1 digit *	
Pt10Rh-Pt type S IEC 584	-50 ... 1750°C	< 0,5 % FS ±1 digit *	
Cu-CuNi type T IEC 584	-70,0 ... +200,0°C or -270 ... 400°C	< 0,3 % FS ±1 digit *	
<b>Resistance thermometer</b>			
Pt100 3-wire DIN EN 60751	-50,0 ... +200,0°C or -200 ... 850°C	< 0,3 % FS ±1 digit	approx. 4 meas. / sec.
Pt1000 2-wire DIN EN 60751	-200 ... 850°C	< 0,3 % FS ±1 digit	
<b>Action signals / normalized signal</b>			
0 ... 1 V, 0 ... 2 V, 0 ... 10 V	-1999 ... +9999 Digit, scale freely adjustable	< 0,2 % FS ±1 digit	approx. 100 meas. / sec.
0 ... 20 mA, 4 ... 20 mA		< 0,2 % FS ±1 digit	
0 ... 50 mV		< 0,3 % FS ±1 digit	
<b>Frequency</b>			
TTL-signal	0,000 Hz ... 10 kHz, scale freely adjustable	< 0,1 % FS ±1 digit	approx. 100 meas. / sec.
Switching contact NPN	0,000 Hz ... 3 kHz, scale freely adjustable		
Switching contact PNP	0,000 Hz ... 1 kHz, scale freely adjustable		
<b>Rotational speed</b>	0,000 ... 9999 U/min.	selectable prescaler: 1-1000, pulse frequency: max. 600 000 Imp./min. at TTL	
<b>Flow</b>	0 ... 9999 l/s, 0 ... 9999 l/min. or 0 ... 9999 l/h		
<b>Counter up / down</b>			
TTL-signal, switching contact (NPN, PNP)	0 ... 9999 or 0 ... 999 000 (with prescaler) <i>selectable prescaler: 1-1000, pulse frequency: max. 10 000 Imp./sec. at TTL</i>	< 0,1 % FS ±1 digit	approx. 100 meas. / sec.
<b>Serial interface:</b> displaying and controlling from values coming via the serial interface			

\* = Point of comparison: ± 1 °C

## General (continuance)

Due to the **universal input** and the various **switching functions** the controller can be optimally adapted to the requirements of the system.

The structured menu navigation allows a straightforward handling and a fast adjustment of the parameters.

A **LED switching position display** gives information to the user about the current status of the switching outputs.

The **automatic self-test and diagnostic system** ensures maximum operational safety and reports systems errors by conclusive error codes.

The parameters are automatically saved, so that all data will be maintained even in case of a power blackout.

Among others most of the GREISINGER transmitters, rpm sensors and flow rate sensors can be connected directly to the **integrated transmitter power supply** (24VDC/22mA) of the controller.

If the device is used as a thermocouple or resistance thermometer, the measuring value can be alternatively displayed in **°C or °F**. By means of an offset correction the measured value can be scaled i.e. to the resistivity of the wires.

The current and voltage inputs can be arbitrarily scaled in the range of -1999 to +9999.

The GIR 2002 has a **serial, bus-compatible interface** by default, by which a comfortable adjustment of the parameters as well as recording of measured values is possible.

With the optionally available Windows library EASYBUS.dll up to 240 devices can be integrated into own programs (i.e. LabView).

## Specification:

**Outputs:** *Please note: Not all options are available for both device types and not all options can be combined with each other. Please see therefore the output options diagram.*

**Output 1:** voltage free relay output (standard)  
normally-open contact, switching power: 5 A (ohmic load), 250 V<sub>AC</sub>

- optional: HLR1: control output for semiconductor relay (6V<sub>bc</sub>/15mA)  
AAG..1: freely scaleable analog output 0(4)-20mA or 0-10V  
ST..1: continuous output 0(4)-20mA or 0-10V

**Output 2:** voltage free relay output (standard)  
change-over contact, switching power: 10 A (ohmic load), 250V<sub>AC</sub>

- optional: HLR2: control output for semiconductor relay (6V<sub>bc</sub>/15mA)

**Output 3:** (not available at standard device type)

- optional: REL3: voltage free relay output (chance-over contact)  
switching power: 1 A / 40 V<sub>AC</sub> or 30 V<sub>DC</sub>  
HLR3: control output for semiconductor relay (14V<sub>bc</sub>/15mA)  
NPN3: elec. isolated NPN-switching contact (max. 1 A / 30 V<sub>DC</sub>)  
AAG..3: freely scaleable analog output 0(4)-20mA or 0-10V  
ST..3: continuous output 0(4)-20mA or 0-10V

**Controller states:** 5 or 6, selectable  
(e.g. 2-point regulator, 3-point regulator, ...)

**Switching point, hysteresis:** freely adjustable

**Response time:** ≤ 25 msec. at normalized signals  
≤ 0.5 sec. at temperature and frequency

**Display:** approx. 13 mm high, 4-digit red LED-display

**Min-/Max-value memory:** the max- and min value will be stored.

**Interface:** serial interface, electrical isolated, EASYBus compatible

**Power supply for sensor:** 24 V DC ±5%, 22mA (for dc-supply 18 V DC)

**Miscellaneous:** permanent self-monitoring, digital filter function, measuring range boundary (limit)

**Voltage supply:** 230 V AC, 50/60 Hz (standard)  
optionally other supply voltages are possible

**Power consumption:** approx. 6 VA

**Operating conditions:** -20 ... +50 °C, 0 ... 80 %RH (non condensing)

**Housing:** standard rack type housing 48 x 96 mm (front frame)  
installation depth: approx. 115 mm (incl. screw-type/  
plug-in terminals)

**Panel mounting:** with fixing clamps  
panel cutout: 43.0<sup>+0.5</sup> x 90.5<sup>+0.5</sup> mm (H x W)

**Electrical connection:** via screw-type/plug-in terminals  
cable diameters from 0.14 to 1.5 mm<sup>2</sup>.

**Protection class:** front side IP54, with optional sealing IP65

**Electromagnetic immunity (EMC):** EN61326 (appendix A, class B)

## Options:

Output schema	GIR 2002			GIR 2002 PID		
	out 1	out 2	out 3	out 1	out 2	out 3
Standard type:	<i>normally-open contact</i>	<i>chance-over contact</i>	--	<i>normally-open contact</i>	<i>chance-over contact</i>	--
<b>available output options</b>	<b>upcharges</b>					
HLR1: output 1 = control output for external SSR						
HLR2: output 2 = control output for external SSR						
REL3: output 3 = relay (chance-over contact)						
HLR3: output 3 = control output for external SSR						
NPN3: output 3 = npn-switching output						
AAG020/1: output 1 = analog output 0(4) - 20 mA			<i>no out3 possible</i>			
AAG010/1: output 1 = analog output 0 - 10 V						
AAG020/3: output 3 = analog output 0(4) - 20 mA						
AAG010/3: output 3 = analog output 0 - 10 V						
STA1: output 1 = continuous output 0(4) - 20 mA						<i>no out3 possible</i>
STV1: output 1 = continuous output 0 - 10 V						
STA3: output 3 = continuous output 0(4) - 20 mA						
STV3: output 3 = continuous output 0 - 10 V						

<sup>1)</sup> At continuous or analog output or npn-switching output with option voltage supply = 12 V<sub>DC</sub> or 24 V<sub>DC</sub>

<sup>2)</sup> At output type REL3 or HLR3 with option voltage supply = 12 V<sub>DC</sub>

## Further Options:

- **12VDC** voltage supply: 12 V<sub>DC</sub> (11-14V) <sup>1)</sup>

- **24VDC** voltage supply: 24 V<sub>DC</sub> (22-27V) <sup>1)</sup>

- **24VAC** voltage supply: 24 V<sub>AC</sub> ±5%

- **115VAC** voltage supply: 115 V<sub>AC</sub> ±5%

## Accessories:

**GGD4896** additional sealing for panel mounting IP65

**EAK 36** Unit stickers (black with white text) for 36 different units for lettering of display devices (p.r.t. page 69)

**Temperature probes**

**p.r.t. page 123 - 137**

**for other accessories p.r.t. page 62, 78/79, 97/98**



Front  
48 x 96Controller with external  
predetermined desired valueE.A.S.Y.Bus  
- Modul**GIR 2002 / SW**  
**GIR 2002 PID / SW****Applications**

- predetermined control
- program control with external set point
- temperature regulation dependent on ambient temperature
- flow rate regulation with set point input via rotary potentiometer
- etc.

**General**

The technical data of the set-point-regulators are largely identical to that ones of the GIR 2002 and GIR 2002 PID. The difference is that the input for 0-10V normalized signals is used as set-point input.

**Specification**

**Measuring input:** universal input for  
**- normalized signals:** 4-20 mA, 0-20 mA, 0-1 V, 0-2 V, 0-50 mV  
**- resistance thermometer:** Pt100 (3-wire), Pt1000 (2-wire)  
**- thermocouples:** types J, K, N, S, T  
**- frequency:** TTL-signal, switching contact  
**- flow, rotational speed:** TTL-signal, switching contact  
**- counter up/down:** TTL-signal, switching contact  
**Display range:** -1999 ... 9999 digit,  
 decimal point, initial and final values freely selectable

**Recommended range:**  $\leq 2000$  digit

**Set-point input:** 0 ... 10 V, freely scalable (for switching point 1)

**Outputs:** 1 normally open contact, 1 change-over contact  
*output options like HLR-control output, analog output or continuous output available - p.r.t. page 67*

**Controller states:** 5 or 6, selectable  
 (e.g. 2-point-regulator, 3-point-regulator, ...)

**Limit values:** freely selectable

**Miscellaneous:**

**Display:** approx. 13 mm high, 4-digit red LED-display  
**Operating conditions:** -20 ... +50 °C, 0 ... 80 %RH (non condensing)  
**Voltage supply:** 230 V AC, 50/60 Hz, approx. 6 VA  
**Housing:** standard rack type housing **48 x 96 mm** (front frame)  
 installation depth: approx. 115 mm (incl. screw-type/ plug-in terminals)  
**Electrical connection:** via screw-type/ plug-in terminals:  
 cable diameters from 0.14 to 1.5 mm<sup>2</sup>.  
**Protection class:** front side IP54 (IP65 on request)  
**Electromagnetic immunity (EMC):** EN61326 (appendix A, class B)

for further technical date refer to GIR 2002 (page 71)

**Options (upon upcharge)**

- output options (e.g. HLR..., AAG..., ST...) *see page 71*
- other voltage supply *see page 71*

Front  
48 x 96

## 2-channel difference controller

E.A.S.Y.Bus  
- Modul**GIR 2002 NS / DIF - ... \*1**

\*1 = Please state your desired input signal at order transaction!  
 020 = (2x) 0-20 mA, 420 = (2x) 4-20 mA, 010 = (2x) 0-10 V

**Applications**

- difference controller for 2 channels
- detection of leaks
- control of delivery and exit air
- pressure compensation
- etc.

**General**

The **GIR 2002 NS / DIF** is a display, control and regulating device for difference measurements. The measuring inputs are designed for standard signals. Please state your desired input signal at order transaction.

**Specification**

**Measuring inputs:** (2 x) 4-20 mA, (2 x) 0-20 mA or (2 x) 0-10 V  
**Please state your desired input signal at order transaction!**  
**Display range:** -1999 ... 9999 digit,  
 decimal point, initial and final values freely selectable  
**Recommended range:**  $\leq 2000$  digit  
**Accuracy:**  $< 0.2\%$  FS  $\pm 1$  digit (at nominal temperature = 25°C)  
**Measuring rate:** approx. 100 meas. / sec.  
**Display/regulation:** difference: input 1 - input 2

**Outputs:** 1 normally open contact, 1 change-over contact  
*output options like HLR-control output, analog output or continuous output available - p.r.t. page 67*

**Controller states:** 5 or 6, selectable  
 (e.g. 2-point-regulator, 3-point-regulator, ...)

**Limit values:** freely selectable

**Miscellaneous:**

**Display:** approx. 13 mm high, 4-digit red LED-display  
**Operating conditions:** -20 ... +50 °C, 0 ... 80 %RH (non condensing)  
**Voltage supply:** 230 V AC, 50/60 Hz, approx. 6 VA  
**Housing:** standard rack type housing **48 x 96 mm** (front frame)  
 installation depth: approx. 115 mm (incl. screw-type/ plug-in terminals)  
**Panel mounting:** with fixing clamps  
 panel cutout: 43,0<sup>+0.5</sup> x 90,5<sup>+0.5</sup> mm (H x W)  
**Electrical connection:** via screw-type/ plug-in terminals:  
 cable diameters from 0.14 to 1.5 mm<sup>2</sup>.  
**Protection class:** front side IP54 (IP65 on request)  
**Electromagnetic immunity (EMC):** EN61326 (appendix A, class B)

for further technical date refer to GIR 2002 (page 71)

**Options (upon upcharge)**

- output for HLR-connection (HLR1, HLR2) *see page 71*
- analog output (AAG.../..)
- other voltage supply *see page 71*



# Temperature regulator

## GIR 2000 Pt cpl. with probe


## GIR 2000 Pt OF without probe



- measuring input for Pt100 (3-wire)
- temperature probe in scope of supply
- integrated switching output
- extensive self-monitoring and diagnostic system
- min-/max value memory

### Specification

**Measuring input:** Pt100 (3-wire)  
**Measuring range:** -50.0 ... +200.0°C  
**Resolution:** 0.1°C  
**Measuring rate:** approx. 4 meas. / sec.  
**Accuracy:** < 0.3 % FS ±1digit (at nominal temperature = 25°C)  
**Temperature probe:** GTF200 Pt100 / 3-wire  
 Pt100-probe, DIN class B (±0.3°C at 0°C), V4A-tube Ø5mm 50mm length, approx. 1m silicone cable. (in scope of supply at GIR2000Pt)



**Output:** voltage free relays output, change-over-contact, switching power: 10A (ohmic load), 250VAC

**Controller state:** 2-point, min-/max-alarm

**Switching point:** freely adjustable

**Response time:** ≤ 0.5 sec.

**Display:** approx. 13 mm high, 4-digit red LED-display

**Min-/max-value memory:** the max- and min value will be stored.

**Miscellaneous:** permanent self-monitoring, digital zero point and scale adjustment

**Voltage supply:** 230 V AC, 50/60 Hz (standard)  
optionally other supply voltages are possible

**Power consumption:** approx. 5 VA

**Operating temperature:** -20 to +50 °C

**Relative humidity:** 0 to 80 %RH (non condensing)

**Storage temperature:** -30 to +70 °C

**Housing:** standard rack type housing 48 x 96 mm (front frame)  
installation depth: approx. 115 mm (incl. screw-type/plug-in terminals)

**Panel mounting:** by fixing clamps  
Panel cutout: 43.0<sup>+0.5</sup> x 90.5<sup>+0.5</sup> mm (H x W)

**Electrical connection:** via screw-type/plug-in terminals  
cable diameters from 0.14 to 1.5 mm<sup>2</sup>.

**Protection class:** front side IP54, with optional sealing IP65

**Electromagnetic immunity (EMC):** EN61326 (appendix A, class B)

### Options (upon upcharge)

- **12VDC** voltage supply = 12 VDC (11-14V)

- **24VDC** voltage supply = 24 VDC (22-27V)

- **24VAC** voltage supply = 24 VAC ±5%

- **115VAC** voltage supply = 115 VAC ±5%

### Accessories

**GGD4896** additional sealing for panel mounting IP65

**APG-4** Housing for surface mounting (incl. seal GGD4896)




device assembled in housing

**Dimensions:** 75 x 125 x 127 mm (H x W x D)  
(without screw connections)

**Cable insert:** screw connections M12x1.5 and M16x1.5

### Accessories (probes)

**GTF 199** Pt100-probe, 3-wire, -50 ... +400°C  
DIN class B, V4A-tube Ø3 x 100mm, approx. 1m silicone cable



**GRO 200 Pt100** tube surface probe, -50 ... +200°C  
DIN class B, sensor body made of aluminium, approx. 2m silicone cable



additional suitable temperature probes

p.r.t. page 132

## Digital controller for temperature and process values



Autotuned, microprocessor based digital controller with 2-, 3-point or PID control

### R 38 (33 x 75 mm)

#### Specification:

**Measuring input:** Please specify type required on order!

- Thermocouples: J, K
- Pt100 (2-wire)
- PTC KTY 81-121, NTC 103AT-2
- Pt1000 (2-wire)

#### Measuring ranges:

Type J: -40...999°C, Type K: -40...999°C, Pt100: -50,0...850°C; PTC: -50,0...+150°C; NTC: -50,0...+109°C; Pt1000: -50,0...-850°C

**Resolution:** temperature: 0,1 or 1°C

(Pt100, Pt100, PTC and NTC: autoranging)

**Accuracy:** ± 0.5 % FS ±1 digit

**Display-Refresh-Time:** 1 sec.

**Display:** 3-digit, 16 mm high LED-display

**Outputs:** 1 or 2 switching outputs available output versions

- relay output (SPDT, switching power: 8A/3A, 250VAC)
- solid state relay (SSR drive): 10 V DC / 10 mA

**Controller state:** 2-point, 3-point or PID control.

**Autotuning:** the autotuning function guarantees the most briefly programming of all requested values.

**Housing:** 75 x 33 x 64 mm, panel cutout: 71 x 29 mm,

Mounting by means of clamping frame

**Protection class:** front IP65 (mounted in panel with gasket)

**Electric connection:** screw-type terminals

**Operating conditions:** 0 ... +50 °C, 20 ... 85 % RH. (non condensing)

**Storage temperature:** -30 ... +70 °C

**Power supply:** 100 V - 240 V (± 10% of nominal value)

**Power consumption:** max. 5 VA

#### Implementations, Options:

##### Power supply:

- F: power supply: 12V AC/DC
- L: power supply: 24V AC/DC
- H: power supply: 90...240V AC

##### Measuring input:

- F: meas. input: Thermocouples
- A: meas. input: Pt100
- T: meas. input: PTC, NTC, Pt1000

##### Output 1:

- R: relay output
- O: SSR drive

##### Output 2:

- R: relay output
- O: SSR drive

**Order information:** (Attention: measuring input has to be stated!)

R 38  1.  2.  3.  4.

**R 38 L A RR:** R 38 with meas. input Pt100 and 2 outputs (2x relay)

## Digital controller for temperature and process values



K 31



K 32

Autotuned, microprocessor based digital controller with 2-, 3-point or PID control and adjustable set point gradient (ramp function)

### K 31 (33 x 75 mm)

### K 32 (33 x 75 mm)

#### Specification:

**Measuring input:**

- Pt100 (3-wire) and thermocouples: J, K, S, R und T
- PTC KTY 81-121, NTC 103AT-2
- normalized signals: 0(4) ... 20 mA
- normalized signals: 0(1) ... 5 Volt and 0(2) ... 10 Volt

#### Measuring ranges:

Pt100: -200...850°C; PTC: -55...+150°C; NTC: -50...+110°C; Typ J: -0...1000°C, Typ K: 0...1370°C, Typ S: 0...1760°C

**Resolution:** temperature: 0.1, 1°C bzw. 0.1, 1°F

normalized signals: scale freely adjustable, -1999...9999 digit

**Accuracy:** ± 0.5 % FS ±1 digit

**Display:** 4-digit, 12 mm high LED-display (K31) resp. two lines, each 4-digit, 7 mm high LED-display (K32)

**Outputs:** till 4 switching outputs available output versions

- relay output (R1 / R2) (change over, switching power: 8A/3A, 250VAC)
- relay output (R3 / R4) (close contact, switching power: 5A/1A, 250VAC)
- solid state relay (SSR drive): 8V DC / 8mA

**Controller state:** 2-point, 3-point or PID control.

**Autotuning:** integrated autotuning function

**Timer / Programm Controller (optionally):** timer realisation / Programm controller function with 8 segments / 4 groups with time and gradient.

**Housing:** 75 x 33 x 64 mm, panel cutout: 71 x 29 mm,

**Protection class:** front IP65

**Electric connection:** screw-type terminals

**Operating conditions:** 0 ... +55 °C, 30 ... 95 %RH. (non condensing)

**Power supply:** standard: 12 VAC ±10%, 50/60Hz a. 12 VDC ±10%

options: 24 VAC/DC ±10% or 90...240 VAC ±10%, 50/60Hz

**Power consumption:** approx. 4 VA

#### Implementations, Options:

##### 1. Functions:

- : controller
- T: controller + timer
- P: controller + programm controller

##### 2. Power supply:

- F: power supply: 12V AC/DC
- L: power supply: 24V AC/DC
- H: power supply: 90...240V AC

##### 3. Measuring input:

- C: meas input: Pt100 und Thermoelement
- E: meas input: PTC, NTC
- I: meas input: current (0-20mA, 4-20mA)
- V: meas input: voltage (0-5V, 0-10V, 1-5V, 2-10V)

**4. Outputs:** **1Rel. 2Rel. 3Rel. 4Rel.**  
R: relay-output **Stand.**  
O: SSR drive

##### 5. Serial Interface:

- S: with serial interface (RS485)

**Order information:** (Attention: measuring input has to be stated!)

K 3x  1.  2.  3.  4.  5.

**K 31 - H E RO-- :** K 31 with meas. input Pt100, 230VAC power supply and 2 outputs (1x relay, 1x SSR drive)

digital controller for temperature and process values



Autotuned, microprocessor based digital controller with 2-, 3-point or PID control, 3-point motor valve control and adjustable set point gradient (ramp function)

### TLK 43 (48 x 48 mm)

#### Specification:

**Measuring inputs:** universal input for

- resistance thermometer: Pt100 (3-wire)
- PTC KTY 81-121, NTC 103AT-2 (2-wire)
- Thermocouples: B, C, E, J, K, L, N, R, S, T
- Normalized signals: 0...20mA, 4...20mA, 0...5V, 0...10V, 1...5V, 2...10V
- mV signals: 0...50mV, 0...60mV, 12...60mV

**Measuring ranges:**

Pt100: -200...850°C; PTC: -55...+150°C; NTC: -50...+110°C;  
Type J: -160...1000°C, Type K: -270...1370°C, Type S: -50...1760°C

**Resolution:** temperature: 0.1, 1°C or 0.1, 1°F

normalized signals: scale freely adjustable, -1999...9999 digit

**Accuracy:** ±0.15 % FS ±1 digit

**Display:** two lines, each 4-digit, 7 mm high LED-display

**Outputs:** up to max. 4 outputs

- available output versions (standard = relay-output)
- relay output (close contact, switching power: 5A/2A, 250VAC)
- solid state relay (SSR drive): 14V DC / 7mA
- normalized signal 0(4) ... 20 mA or 0(2) ... 10 Volt

*Please pick the possible combinations from the "Output options"-table.*

**Controller state:** 2-point, 3-point or PID (single or double action) control, continuous, 3-point motor valve control

**Autotuning:** integrated autotuning function

**Alarm outputs:** max. 3 (depending from output configuration)

**Analog output:** scaleable (normalized signal output necessary)

**Interface [option]:** RS485, optoisolated

**Control input [option]:** digital input that permit the remote commutation of the set point.

**Heater break function [option]:** the controller is available with a current transformer input for the heater break monitoring

**Housing:** 48 x 48 x 98 mm, panel cutout: 45.5 x 45.5 mm,  
Mounting by means of clamping frame

**Protection class:** front IP54 (mounted in panel with gasket)

**Electric connection:** screw-type terminals

**Operating conditions:** 0 ... +55 °C, 30 ... 95 %RH. (non condensing)

**Power supply:** standard: 90...240 VAC ±10%, 50/60Hz., approx. 10VA  
option: 24 VAC ±10%, 50/60Hz and 24 VDC ±10%

#### Implementations, Options:

##### 1. Power supply:

- L: power supply: 24V AC/DC
- H: power supply: 90...240V AC

##### 2. Outputs:

- |    |                                |        |       |       |       |
|----|--------------------------------|--------|-------|-------|-------|
| R: | relay-output                   | 1Rel.  | 2Rel. | 3Rel. | 4Rel. |
| O: | SSR drive                      | Stand. |       |       |       |
| C: | Normalized signals 0(4)...20mA |        |       |       |       |
| V: | Normalized signals 0(2)...10V  |        |       |       |       |

**Limitations:** If RS485 is chosen, OUT4 is not possible.  
OUT3 and OUT4 have to have the same output option.

##### 3. Digital control input and serial interface:

- I: with control input and serial interface (RS485)

##### 4. Heater break function:

- H: current transformer input

#### Orderinformation:

TLK 43    1.    2.    3.    4.  
        

**TLK 43 L RROO I -:** TLK 43 with serial interface and 4 outputs  
(2x relay and 2x SSR).

digital controller for temperature and process values



Autotuned, microprocessor based digital controller with 2-, 3-point or PID control

### K 48 (48 x 48 mm)

#### Specification:

**Measuring inputs:** universal input for

- resistance thermometer: Pt100 (3-wire)
- PTC KTY 81-121, NTC 103AT-2 (2-wire)
- Thermocouples: J, K, S, R, T, IR
- Normalized signals: 0...20mA, 4...20mA, 0...5V, 0...10V, 1...5V, 2...10V
- mV signals: 0...50mV, 0...60mV, 12...60mV

**Measuring ranges:**

Pt100: -200...850°C; PTC: -55...+150°C; NTC: -50...+110°C;  
Type J: -160...1000°C, Type K: -270...1370°C, Type S: -50...1760°C

**Resolution:** temperature: 0.1, 1°C or 0.1, 1°F

normalized signals: scale freely adjustable, -1999...9999 digit

**Accuracy:** ±0.15 % FS ±1 digit

**Measuring rate:** approx. 8 measurements / sec.

**Display:** 4-digit, 12 mm high LED-display

**Outputs:** up to max. 3 outputs

- available output versions (standard = relay-output)
- relay output (R1/R2) (close contact, switching power: 8A/3A, 250VAC)
- relay output (R3) (close contact, switching power: 5A/2A, 250VAC)
- solid state relay (SSR drive): 14V DC / 20mA

*Please pick the possible combinations from the "Output options"-table.*

**Controller state:** 2-point, 3-point or PID (single or double action) control

**Autotuning:** integrated autotuning function

**Timer / Programm Controller (optionally):** timer realisation / Programm controller function with 8 segments / 4 groups with time and gradient.

**Alarm outputs:** max. 3 (depending from output configuration)

**Housing:** 48 x 48 x 98 mm, panel cutout: 45.5 x 45.5 mm,  
Mounting by means of clamping frame

**Protection class:** front IP54 (mounted in panel with gasket)

**Electric connection:** screw-type terminals

**Operating conditions:** 0 ... +55 °C, 30 ... 95 %RH. (non condensing)

**Power supply:** standard: 90...240 VAC ±10%, 50/60Hz.  
option: 24 VAC ±10%, 50/60Hz and 24V VDC ±10%

#### Implementations, Options:

##### 1. Functions:

- : controller
- T: controller + timer
- P: controller + programm controller

##### 2. Power supply:

- L: power supply: 24V AC/DC
- H: power supply: 90...240V AC

##### 3. Measuring input:

- C: meas input: Pt100 und Thermoement
- E: meas input: PTC, NTC
- I: meas input: current (0-20mA, 4-20mA, ...)
- V: meas input: voltage (0-5V, 0-10V, 1-5V, 2-10V, ...)

##### 4. Outputs:

- |    |                       |        |       |       |
|----|-----------------------|--------|-------|-------|
| R: | relay-output          | 1Rel.  | 2Rel. | 3Rel. |
| O: | SSR drive             | stand. |       |       |
| D: | digital control input | -      | -     |       |
- whereas R1 and R2: 8A/3A switching; R3: 5A/2A switching*

#### Orderinformation:

                  1.    2.    3.    4.  
 K 48            

**K 48 - L C RR -:** K 48 controller with 2x relay.

**Self-supplying plug-in display for 4-20 mA measuring transducer**  
no auxiliary energy source required - device will tap from loop current.

## GIA 0420 VO



## GIA 0420 VOT



**GIA 0420 VO** without buttons

**GIA 0420 VOT** with buttons

**GIA 0420 VOT - ex**



with Ex-protection for all potentially explosive atmospheres

**Ex qualification:** II 2G Ex ia/ib IIC/IIB T4

(Further Information please refer to our Homepage [www.greisinger.de](http://www.greisinger.de))

### Specification:

**Input signal:** 4-20 mA (2-wire) (optionally 0 .. 10 V)  
**Voltage load:** approx. 2 V (at ...-ex: approx. 3.5 V)  
**Accuracy:**  $\pm 0.2\%$  FS  $\pm 1$  digit (at nominal temperature = 25°C)  
**Display:** 10 mm high LCD  
**Display range:** -1999 up to +9999  
**Decimal point:** any position  
**Scale:** freely adjustable via 3 buttons  
 (for "VO": accessible after cover has been removed)

**Measuring rate:** approx. 5 measurements / sec.  
**Filter:** adjustable  
**Limit:** 3 limit functions selectable:  
 LI 0: Values above/below range permissible  
 LI 1: Values above/below range not permissible  
 LI 2: When range is exceeded, the referring rail will be displayed

**Switching outputs:** (only devices with option S1 or S2)  
 - S1: 1 electrically isolated open collector outputs,  
 - S2: 2 electrically isolated open collector outputs,  
 connection via separate M8 jack

**Switching point, switching hysteresis:** freely adjustable  
**max. switching voltage:** 28 V  
**max. switching current:** 1 A (Option S1: 20 mA)  
**Reaction time:**  $\leq 250$  ms

**Min./Max. value memory:** memorizing of max. and min. values.  
**Operation, Configuration:** via 3 keys.

**Working conditions:** -25 to +50°C, 0 to 80 % RH (non-condensing)  
**Electric connection:** special-adaptor design for cubic plug  
 EN 175301-803/A for simple plug-in wherever required. 2 screws  
 (68 and 75 mm) included in scope of supply.

**Housing:** ABS, keypad (resp. transparent panel made of polycarbonate)  
 approx. 48,5 x 48,5 x 35,5 mm (H x W x D) without special adapter  
 approx. 50,5 x 90 x 39,5 mm (H x W x D) with special adapter  
 Protection rating: IP65 (when mounted appropriately)

- no auxiliary energy source required - device will tap from 4 to 20 mA loop current.
- scale freely adjustable 'on site' within seconds, no auxiliary devices required
- can be turned to any position, fits in any position regardless of transmitter location
- large display range from -1999 to 9999 Digit.
- maximum accuracy and minimum temperature drift
- large, 10 mm high LCD
- plug-in wherever required and device will be ready! The quickest way possible to get an "on site display" for your 4 to 20 mA measuring transducers.
- monitoring for probe damage, probe short circuit, values above/below permissible limit
- steady display even if transmitter signal is disturbed: due to software filters (can be switched on/off)

### Options:

- **S1** with 1 electrically isolated switching output  
 Delivery incl. 1m connecting cable for connection of switching output (**Option S2 just in combination with Ex-device available**)
- **S2** with 2 electrically isolated switching outputs  
 Delivery incl. 1m connecting cable for connection of both switching outputs (**Option S2 not in combination with Ex-device available**)

## GIA 0420 WKT

### GIA 0420 WKT - ex

with Ex-protection for all potentially explosive atmospheres

### Specification:

as GIA 0420 VOT but

**Electric connection:** connection to any standard signal source (4-20 mA) via 2 m connection cable.

Housing with mounting holes can be mounted to any surface.



**Option:** Input signal 0 ... 10 V (3-wire)

Display with power supply (12 ... 28 V) power consumption: < 10 mA

# Unrivalled High Tech In Miniature Format

# GRA 0420 VO

Plug on controller/display needs no auxiliary energy  
freely scaleable via 3 keys



- alarm delay adjustable
- extensive self check and diagnosis system

- LED-display
- no auxiliary energy source required
- with 1 open collector output
- optional with 2 electrically isolated high current open collector switching outputs (28V / 1A)
- 4 switching functions
- selectable preference state of switching outputs
- fast controlling and supervision (reacting time <20ms)
- alternatively available version: 0-10V (auxiliary energy required)
- Min./Max. value memory
- 3 limit functions, 3 filter stages

## GRA 0420 VO

Without auxiliary energy, output 4-20mA, 1 electrically isolated switching output.

## GRA 010 VO

Output 0-10V, 1 +Ub-switching switching output.

### Specification:

	GRA 0420 VO...	GRA 010 VO..
<b>Input signal:</b>	4 ... 20 mA (2-wire)	0 ... 10 Volt (3-wire)
<b>Voltage load:</b>	< 5.5 V	
<b>Input resistance:</b>		approx. 30 kOhm
<b>Supply voltage:</b>		12 - 28 Volt
<b>Supply current:</b>	from current loop	< 10 mA
<b>Display:</b>	4 digit LED, approx. 7 mm high	
<b>Display range:</b>	-1999 ... 9999 digit, first and last value freely adjustable	
<b>Recommended range:</b>	≤ 2000 digit	
<b>Decimal point:</b>	any position	
<b>Accuracy:</b>	< 0.2% FS ±1digit (at nominal temperature = 25°C)	
<b>Measuring rate:</b>	> 50 measurements / sec.	
<b>Filter:</b>	selectable in 3 stages	
<b>Limit:</b>	3 limit functions selectable:	
	LI 0: Values above/below range permissible	
	LI 1: Values above/below range not permissible	
	LI 2: When range is exceeded, the referring rail will be displayed	

### Switching outputs:

GRA0420VO: 1 electrically isolated open collector output, connection via cubic plug

GRA010VO: 1 +Ub-switching open collector output, connection via cubic plug

Option ... - S2: 2 electrically isolated open collector outputs, connection via separate M8 jack

**Switching point, switching hysteresis:** freely adjustable

**max. switching voltage:** 28 V

**max. switching current:** 20 mA (at option ... - S2: 1 A)

**Reaction time:** ≤ 20 ms

**Switching functions:** 2 or 3 point controller, 2 point controller with min-/max-alarm or separate min-/max-alarm

**Min./Max. value memory:** memorizing of max. and min. values.

**Operation, Configuration:** via 3 keys.

**Working temperature:** -25 to +50°C

**Relative humidity:** 0 to 80 % RH (non-condensing)

**Electric connection:** special-adapter design for cubic plug EN 175301-803/A for simple plug-in wherever required. 2 screws (68 and 75 mm) included in scope of supply.

**Housing:** ABS, keypad (resp. transparent panel made of polycarbonate) approx. 48,5 x 48,5 x 35,5 mm (H x W x D) without special adapter approx. 50,5 x 90 x 39,5 mm (H x W x D) with special adapter  
Protection rating: IP65 (when mounted appropriately)

### Option:

- **S2** design type with 2 electrically isolated switching outputs  
Outputs with increased switching current (28V / 1 A), connection via separate M8 jack (Delivery incl. 1m connecting cable for connection of both switching outputs)

- **OT** design type without pushbuttons in the cover  
(e.g. if the adjustment of the device shouldn't be directly accessible for the user)

## GRA 0420 WK

Without auxiliary energy, output 4-20mA, 1 electrically isolated switching output.

## GRA 010 WK

Output 0-10V, 1 electrically isolated switching output.

### Specification:


same as GRA ... VO, but

**Electric connection:** connection to any standard signal source and switching output via 2 m connection cable.

Housing with mounting holes can be mounted to any surface whatsoever.




## Housing for surface mounting *for build in of devices with the format 24 x 48 or 48 x 96 mm*

	Ordering type / description	suitable for	price
	<b>APG-1 *</b> Housing for surface mounting incl. seal GGD2448 <b>Dimensions:</b> 80 x 82 x 95 mm (H x W x D), without elbow-plug <b>Panel cutout:</b> for 1 display at the format 24 x 48 <b>Connection:</b> elbow-plug in according EN 175301-803/A, 4-pin <b>Protection class:</b> IP65	GIA 20 EB  GIR 230 ...	
	<b>APG-2 *</b> Housing for surface mounting incl. seal GGD2448 <b>Dimensions:</b> 80 x 82 x 95 mm (H x W x D), without screw connections <b>Panel cutout:</b> for 1 display at the format 24 x 48 <b>Cable insert:</b> 2 x screw connections M12x1.5 <b>Protection class:</b> IP65		
	<b>APG-3 *</b> Housing for surface mounting incl. seal GGD2448 <b>Dimensions:</b> 80 x 82 x 95 mm (H x W x D), without screw connections <b>Panel cutout:</b> for 2 displays at the format 24 x 48 <b>Cable insert:</b> 2 x screw connections M12x1.5 <b>Protection class:</b> IP65	GTH2448/1,2,3	
	<b>APG-4 *</b> Housing for surface mounting incl. seal GGD4896 <b>Dimensions:</b> 75 x 125 x 126 mm (H x W x D), without screw connections <b>Panel cutout:</b> for 1 display at the format 48 x 96 <b>Cable insert:</b> screw connections M12x1.5 and M16x1.5 <b>Protection class:</b> IP65	GIA 2000, GIR 2000 Pt  GIR 2002 ...,  GTH 83 EG,  GTH 1150 EG	
	<b>APG-6 *</b> Housing for surface mounting incl. seal GGD4896 <b>Dimensions:</b> 175 x 125 x 126 mm (H x W x D), without screw connections <b>Panel cutout:</b> for 2 displays at the format 48 x 96 <b>Cable insert:</b> screw connections 2 x M12x1.5 and 2 x M16x1.5 <b>Protection class:</b> IP65		


\* Note: All housings without installation device and without unit sticker! These (see page 69) have to be ordered separately! The Installation device will be assembled for free in the housing (on common order) if desired.

## Pre-assembled mounting plate *for even easier mounting of the transmitters and devices in 80 x 82 housing*

	<b>MP 8082</b> mounting plate for 80 x 82 housings <i>The mounting plate (of plastic, black) will be assembled to the ordered device ex works. The mounting flaps allow direct mounting to the wall without opening the housing.</i> <b>Dimensions:</b> 80 x 114 x 6 mm (H x W x D)	all devices at <b>80 x 82-housing: e.g.</b> GTMU, GRHU, GHTU, GMUD, GPHU 014 MP, OXY 3610 MP, APG-1	
---	---	---	--

Other design types upon request

## Semiconductor Relais

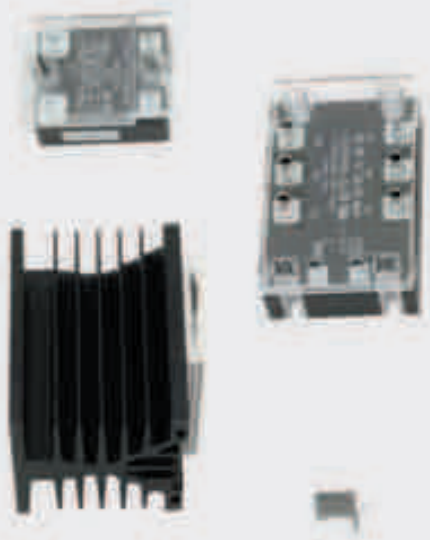

**HLR 50A** semiconductor relay  
 incl. suitable touch-guard protection cap  
**Switching voltage:** 48 ... 530 V AC  
**Switching current:** max. 50 A  
**Control voltage:** 3 - 32 V DC  
**Isolation voltage:** 4000V  
**Operating temperature:** -40...+80°C  
**Dimensions:** approx. 59 x 46 x 35 mm

**D53 TP50D** 3 phase semiconductor relay  
 incl. suitable touch-guard protection cap  
**Switching voltage:** 48 ... 530 V AC  
**Switching current:** max. 50 A  
**Control voltage:** 3 - 32 V DC  
**Isolation voltage:** 4000V  
**Operating temperature:** -40...+80°C  
**Dimensions:** approx. 100 x 75 x 35 mm

**D53-3P** Suitable heat sink for D53TP50D  
 snap-on mounting on hat rail

**RC-element** 230 VAC for inductive switching loads  
 (solenoids, relay, motors etc.)

## Power supply

### GNG 220 / 2

Power supply device integrated in snap-on housing for top hat rail - for 2 transmitter

**Input voltage:** 230 V, 50/60 Hz  
**Output voltage:** 2 x 18 V DC  $\pm 5\%$ , 25 mA each  
**Dimensions:** 48 x 96 x 52 mm (W x H x D)  
**Mounting:** snap-on to top hat rail

### GNG 220 / 2 - 12V

identical to GNG220/2, but with output voltage 2 x 12 V DC, 30 mA each

### GNG 220

identical to GNG220/2, but with output voltage 1 x 12 V DC, 100 mA, unregulated

### GNG 12 / 300

Power supply device integrated in snap-on housing for top hat rail

**Input voltage:** 230 V, 50/60 Hz  
**Output voltage:** 12 V DC  $\pm 5\%$ , 300 mA  
**Dimensions:** 70,4 x 96 x 62 mm (W x H x D)  
**Mounting:** snap-on to top hat rail

### GNG 24 / 150

identical to GNG12/300, but with output voltage: 24 V DC  $\pm 5\%$ , 150 mA

*other voltage upon request*



## DC/DC-converter

### GNG 12 / 24

### GNG 24 / 24

DC/DC-converter to electrically isolate 12V or 24V DC-supply voltages

**Input voltage:** GNG12/24: 10 - 18 V DC  
 GNG24/24: 19 - 30 V DC  
**Output voltage:** 24 V DC  $\pm 5\%$ , max. 80 mA, electrically isolated  
**Insulating voltage:** 500 V  
**Operating temperature:** -20 ... +70° C  
**Mounting:** snap on to top hat rail.  
**Dimensions:** minimum space requirements due to narrow rack housing (module fully encapsulated). Installation width only 22.5 mm.

### GNG 12 / 2 x 24

### GNG 24 / 2 x 24

**Input voltage:** GNG 12 / 2 x 24: 10 - 18 V DC  
 GNG 24 / 2 x 24: 19 - 30 V DC  
**Output voltage:** 2 x 24V DC  $\pm 5\%$ , max. 80 mA each, electrically isolated  
 other data identical to GNG12/24 resp. GNG24/24



## Power supply and relay module (e.g. for GIA20EB)

### GNR10

Power supply and relay module for top-hat rail

Power supply for one GIA20EB and one transducer.

**Input voltage:** 230V, 50/60Hz (others upon request)  
**Output voltage:** approx. 11V DC (unregulated) for the supply of a GIA20EB.  
 18V DC  $\pm 5\%$  (regulated), 25 mA for meas. transducer

**Relay outputs:** 2 volt-free changeover contacts, switching current: max. 10 A ohmic load.

**Connection:** screw-type terminal  
**Dimensions:** 48 x 96 x 60 mm (W x H x D)  
**Mounting:** snap on to top hat rail

### GR10

Relay module for top-hat rail

for one GIA20EB to mounting to a top-hat rail

**Input voltage:** 12V DC (others e.g. 24VDC upon request)  
**Relay outputs:** 2 volt-free changeover contacts, switching current: max. 10 A ohmic load.

**Connection:** screw-type terminal  
**Dimensions:** 48 x 96 x 60 mm (W x H x D)  
**Mounting:** snap on to top hat rail





## DIGITAL-PANEL-MOUNTED DISPLAY MODULES for all applications

- 2 temperature modules (covering temperature ranges from -50 up to +1150° C)
- 4 pressure modules for barometer, vacuum meter, manometer for absolute pressure, over/under pressure and pressure difference measurements. Pressure range up to 10 bar
- one voltmeter module with 3 integrated voltage ranges

### Common specification for all modules:

**Display:** 3½-digit LCD display, 13mm high (±1999 digit), **scan rate:** 3 meas. per second, **operating temperature:** 0 to 50°C, **atmospheric humidity:** 0 to 85%RH (non-condensing), **storage temperature:** -10 to +70°C, **current supply:** 9 - 12 V DC, **electrical connection:** via soldering pin, **dimensions:** 38 x 76 x 22 mm (H x W x D), **panel-cutout:** 36<sup>+0.5</sup> x 73.2<sup>+0.5</sup>mm (H x W), **panel thickness:** max. up to 9.5mm. snap-on frame protruding only 1mm over front plate - professional design, 3mm thick anti-reflex screen

### TEMPERATURE

#### GPT 180

TEMPERATURE MODULE for semiconductor sensor KTY 83-110

**Range:** -50.0 up to +175.0° C / **Resolution:** 0.1° C

**Accuracy:** approx. 1% f.s. / **Power consumption:** approx. 1 mA

**Suitable sensors KTY 83-110:** please refer to pages 128

#### GPT 1155

TEMPERATURE MODULE for thermocouple NiCr-Ni (type K)

**Range:** -50 up to +1150° C / **Resolution:** 1° C

**Accuracy:** (at nominal temperature = 25°C) better than 1 % from -20 up to +550 and from 920 up to 1150° C, 550 up to 920 better than 1.5%

**Power consumption:** approx. 0.35 mA

**Suitable sensors type NiCr-Ni (type K)** p.r.t. pages 123 - 127, 132 - 133

**GTU 300/152** wire sensor with soldering pin plug

### Pressure

#### GPD 15 ABS

DIGITAL BAROMETER / VACUUM METER MODULE (sensor not included)

**Range:** 0 to 1100 mbar (hPa) absolute / **Resolution:** 1 mbar

**Accuracy module:** 1 mbar ±1 digit

**Accuracy sensor:** (sensor not included in scope of supply):

±0.2% (typical) for linearity and hysteresis, ±0.4% for temperature drift from 0 to 50° C (typ. values for sensors compensated to module)

**Power consumption** (incl. sensor) approx. 3.5 mA

**Suitable sensors:** (please order separately)

**SCX 15 ANC** (pressure sensor, loose)

**SCX 15 ANC/G** (pressure sensor with housing, 1m connection cable)

#### GPD 05 REL

DIGITAL MANOMETER for over/under pressure and pressure difference (sensor not included)

**Meas. range:** -100,0 to +199,9 mbar relative (referring to ambient pressure)

**Resolution** 0,1 mbar / **Accuracy module** 0,1 mbar ±1 digit

**Accuracy sensor and power consumption** as above

**Suitable sensors:** (please order separately)

**SCX 05 DNC** (pressure sensor, loose)

**SCX 05 DNC/G** (pressure sensor with housing, 1m connection cable)

#### GPD 30 REL

DIGITAL MANOMETER for over/under pressure and pressure difference (sensor not included)

**Meas. range:** -1000 to +1999 mbar relative (referring to ambient pressure)

**Resolution** 1 mbar / **Accuracy module** 1 mbar ±1 digit

**Accuracy sensor and power consumption** as above

**Suitable sensors:** (please order separately)

**SCX 30 DNC** (pressure sensor, loose)

**SCX 30 DNC/G** (pressure sensor with housing, 1m connection cable)

#### GPD 150 REL

DIGITAL MANOMETER for over/under pressure and pressure difference (sensor not included)

**Range:** -1.00 up to 10.00 bar relative (referring to ambient pressure)

**Resolution** 0.01 bar **Accuracy module** 1 mbar ±1 digit

**Accuracy sensor and power consumption** as above

**Suitable sensors:** (please order separately)

**SCX 150 DNC** (pressure sensor, loose)

**SCX 150 DNC/G** (pressure sensor with housing, 1m connection cable)

## DIGITAL DISPLAY for all measuring transducers 4 to 20 mA 2-wire, no auxiliary power required



Digital panel module without auxiliary energy



- for use in 4 to 20 mA output circuits of measuring transducers

• **WITHOUT EXTERNAL AUXILIARY SUPPLY**

- high operating reliability

- **Cost reduction as power supplies and their cables are no longer required**

### GTA 0420 (standard range)

Large, high-contrast 3 1/2 digit LCD, 12.7 mm high; to either directly display loop current or convert it into any desired value such as temperature, pressure, fill level, humidity, travel, weight, height, liquid flow, ppm, mg/l, % sat., etc..

Snap-on, industrial panel-mounting type, anti-reflex screen 3 mm thick (not to be compared with unprotected glass covered display as used with cheap modules!)

Minimum size: 38 x 76 x 22 mm (H x W x D). Devices can be stack-mounted at a distance of 38 mm.

Standard printings available, eg. °C, %, V, mbar, bar, otherwise neutral.

### Specification:

**Input signal:** 4 .. 20 mA, 2-wire

**Display ranges:** 0,0 ... 100,0; 0,0 ... 199,9; -50,0 ... +50,0 (standard); any display range desired against upcharge (p.r.t. options)

**Decimal point:** any place (soldering jumper)

**Fine tuning:** starting point at 4 mA and end point at 20 mA can each be shifted by ±50 digits

**Display:** 3½ digit LCD with ±1999 digits, 13 mm high

**Scanning rate:** 3 measurements per second

**Voltage load:** approx. 4,7 V (standard - connection wrong-polarity protected) optional: approx. 3,5 V (without polarity protection) - upon request

**Accuracy:** (at nominal temperature = 25°C) ±0.1% ±1digit

**Temperature coefficient:** 100 ppm / K

**Operating temperature:** 0 to 50° C

**Atmospheric humidity:** 0 to 85 %RH (non-condensing)

**Storage temperature:** -10 to +70° C

**Dimensions:** 38 x 76 x 22 mm (H x W x D)

**Panel cutout:** 36<sup>+0.5</sup> x 73.2<sup>+0.5</sup> mm (H x W)

**Panel thickness:** max. up to 9.5mm.

### Options:

Any measuring range desired (against upcharge)

(no upcharge for orders as of 10 pieces of the same range)

**Further displays without auxiliary supply:** p.r.t. page 64, 76, 77

### VOLTAGE

#### GPV 220

DIGITAL VOLTMETER, 3 integrated voltage ranges - others can be realised by means of an external voltage divider

**Ranges:** ±199.9 mV DC, ±1999 mV DC, ±19.99 V DC integrated; (±199.9 V DC or 1999 V DC can be realised by means of an external voltage divider)

**Decimal point:** any place selectable

**Resolution:** up to 100µV / **Input impedance:** 100MΩ resp. 1MΩ

**Accuracy:** 0.1% ±1 digit / **T.C. value:** 100 ppm/K

**Power consumption:** approx. 100µA only (approx. 3000 hours with normal 9V-battery)

# Data logger / EASYBus

	Measurands								EASYBus-Load	Description	Page
	Standard Signal	Temperature	Humidity	Pressure	Pulse	State	Carbon monoxide	Carbon dioxide			

## DATA LOGGER

EL-USB-2-LCD		✓	✓						-	USB data logger	82
EL-USB-TC-LCD		✓							-	USB data logger	82
T-Logg 100 ..		✓							-	Stand-Alone logger	83
T-Logg 120 ..	✓								-	Stand-Alone logger	83
T-Logg 160		✓	✓						-	Stand-Alone logger	83
EASYLog 40 K ..		✓							2	EASYBus data logger	84
EASYLog 40IMP/ ..					✓				2	EASYBus data logger	84
EASYLog 24 RFT ..		✓	✓						2	EASYBus data logger	85
EASYLog 40NS ..	✓								2	EASYBus data logger	85
EASYLog 40 BIN						✓			2	EASYBus data logger	86
EASYLog 80 CL		✓	✓	✓					2	EASYBus data logger	86

## EASYBus MODULES

EBHT - ..		✓	✓						1,5	EASYBus sensor modul	88
EBT - 2R ..		✓							1,5	EASYBus sensor modul	89
EBT - AP ..		✓							1,5	EASYBus sensor modul	89
EBT - IF ..		✓							1,5	EASYBus sensor modul	90
EBN / ..	✓								2	EASYBus sensor modul	90
EBG - CO - 1R							✓		1	EASYBus sensor modul	91
EBG - CO2 - 1R								✓	1	EASYBus sensor modul	91

## EASYBus CONTROLLER

GIA 20 EB									1	Universal display and controller	66
GIA 2000									1	Universal display	69
GIR 2002									1	Universal display and controller	70
EB 2000 MC									-/14	Display- and monitoring device	93
EB 3000									1/30	Display-, controlling- and monitoring device	92

## EASYBus INTERFACE CONVERTER

EBW 1									14	Connection to RS 232-interface	96
EBW 3									2	Connection to USB-interface	96
EBW 64									64	Connection to RS 232-interface	96
EBW 240									240	Anschluss an RS 232-Schnittstelle	96



# USB Data Logger

with Display for

external Thermocouples (J, K und T) or Humidity / Temperature and Dew Point



- Direct connection to USB interface
- 2 programmable alarm limits
- LED for indication of low battery power
- Data logger with display
- red, green and orange LED for system status
- IP67
- incl. software

## EL-USB-2-LCD (device + software)

USB Data Logger for Humidity / Temperature and Dew Point

## EL-USB-TC-LCD (device + software)

USB Data Logger for external Thermocouples (J, K und T)

### Specification EL-USB-2-LCD:

Measuring Range:	Temperature: -35 ... +80°C Humidity: 0 ... 100% r.h. Dew Point via Software
Resolution:	0,5 °C / 0,5% r.h.
Accuracy:	Temperature (typ): ± 1°C Humidity: ± 3,5 %r.F. (in the range 20 till 80 %r.h.) Dew Point: ± 2°C (in the range 40...100%r.h., 25°C)
Memory:	16.382 recordings per humidity and temperature
Logging Interval:	10 sec, 1 min, 5 min, 30 min, 1 h, 6 h, 12 h programmable via software
Serial Interface:	USB
Battery:	3,6V lithium battery, size 1/2 AA, exchangeable
Dimensions:	103 x 26,4 mm (L X W), Ø 27,0mm
Scope of supply:	1 device, 1 lithium battery 3,6V, 1 software, 1 clip 1 protection cap, 1 operating manual (on CD-ROM), 1 clip

### Specification EL-USB-TC-LCD:

Measuring Range:	Typ J: -130 ... +900°C, Typ K: -200 ... +1300°C Typ T: -200 ... +350°C
Resolution:	0,5°C
Accuracy (typ.):	± 1,0°C @ 25°C
Thermocouple Connectors :	Thermoelement socket in miniature size, suitable for flat-pin plugs
Memory:	32.000 data
Logging Interval:	1 sec, 10 sec, 1 min, 5 min, 30 min, 1 h, 6 h, 12 h adjustable via software
Operating Temp.:	Range: -10 ... +40°C
Serial Interface:	USB
Battery:	3,6V Lithium battery, size 1/2AA
Battery Life Time:	6 month @ 25°C and recording interval 1 min
Dimensions:	118,2 x 26,8 mm (L X W), Ø 27,0mm
Scope of supply:	1 device incl. 3,6V lithium battery, 1 software, 1 protection cap, 1 operating manual (on CD-ROM), 1 clip, 1 wire temperature probe

### Special Note:

EL-USB-2-LCD and EL-USB-TC-LCE are neither BUS- nor EASYBUS compatible.

TEMPERATURE-LOGGER  
for individual programming of  
recording time



T-Logg 100 E



T-Logg 100

DIN EN  
12830

TEMPERATURE DATA LOGGER  
(16.000 meas. values) for any application

T-Logg 100

T-Logg 100 E

### Starter kit

T-Logg 100 SET

Complete set: T-Logg 100 + USB 100 (incl. software)

### Specification

#### Measuring range:

T-Logg 100:	-30,0 ... 60,0 °C
T-Logg 100 E:	-30,0 ... 120,0 °C

#### Resolution:

	0,1 °C
--	--------

#### Accuracy (at nominal temperature = 25°C):

T-Logg 100:	±0,5 °C
T-Logg 100 E:	±0.2 % of meas. value ±0.5 °C

#### Sensor:

T-Logg 100:	integrated in device
T-Logg 100 E:	sensor tube made of stain-less steel, Ø5 mm, approx. 50 mm long, approx. 1 m silicone cable. Cable with anti-buckling glanding to housing.

#### Display:

LCD-display, 10 mm high

#### Recording interval:

from 2 sec. to 5 h

*free programmable via software*

#### Storage capacity:

16.000 measuring values

#### Recording time:

166 days (if interval is 15 min.)

#### Working temperature:

-30 to +60 °C

#### Storage temperature:

-40 to +85 °C

#### Battery:

CR2032, exchangeable

#### Battery service life:

over 3 years

(if recording interval is 15 min.)

#### Approvals:

DIN EN 12830

#### Interface:

serial interface, 3-pin miniature integral plug.

*The T-Logg 100 is not suitable for bus operation and is not E.A.S.Y.Bus compatible!*

#### Housing:

48,5 x 48,5 x 35,5 mm (H x W x D). plugs, sensor connection, ... are not included

Housing made of shock resistant plastic, transparent front made of polycarbonate, splash water-proof: IP 65 (excl. protection cap at T-Logg 160).

#### Noise immunity (EMC):

the T-Logg 100 have been manufactured in accordance with the regulations concerning EMC (2004/108/EG).  
The device meets EN 61326-1 (table 2, class B), additional error: < 0,5% (< 1% at T-Logg 100 E)

# T-Logg - The logger series for stand-alone applications

## STANDARD SIGNAL LOGGER

for individual programming of recording time



T-Logg 120 K

T-Logg 120 W

## STANDARD SIGNAL DATA LOGGER

(16.000 meas. values) for transducers etc.

### T-Logg 120 W - ...

(with elbow type plug)

### T-Logg 120 K - ...

(with PG glanding and cable)

**Note:** please specify standard signal desired when ordering (i.e.: T-Logg 120 K - 0-1V)

#### Specification

<b>Display range:</b>	-1999 ... 9999 digit <i>freely programmable</i>
<b>Decimal point</b>	any position
<b>Input signal: <i>only one signal!</i></b>	0 - 1 V, 0 - 2 V, 0 - 10 V, 0 - 20 mA or 4 - 20 mA other input signals upon request <i>(input is not isolated from interface)</i>
<b>Accuracy:</b>	±0,5 % FS (at nom. temperature)
<b>Display :</b>	10 mm high LCD-display
<b>Recording interval:</b>	from 2 sec. to 5 h <i>freely programmable via software</i>
<b>Storage capacity:</b>	16.000 measuring values
<b>Recording time:</b>	166 days (if interval is 15 min.)
<b>Working temperature:</b>	-25 to +60 °C
<b>Storage temperature:</b>	-30 to +85 °C
<b>Battery:</b>	CR2032, exchangeable
<b>Battery service life:</b>	over 3 years (if recording interval is 15 min.)
<b>Electric connection:</b> (for input signals)	... <b>120 W</b> - ...: elbow-plug in accordance with EN 175301-803/A for connection to an existing transmitter. ... <b>120 K</b> - ...: approx. 0.5 m connection cable

## HUMIDITY-/TEMPERATURE-LOGGER

for individual programming of recording time



## HUMIDITY / TEMPERATURE DATA LOGGER

(16.000 meas. values) for any application

### T-Logg 160

#### Starter kit

### T-Logg 160 SET

Complete set with T-Logg 100 and interface converter USB 100 (incl. MINISOFT)

#### Specification

<b>Measuring ranges, display ranges:</b>	
<b>Humidity:</b>	0.0 ... 100.0 %RH
<b>Temperature:</b>	-25.0 ... 60.0 °C
<b>Resolution:</b>	0.1 °C / 0.1 %RH
<b>Accuracy</b> (at nominal temperature = 25°C):	
<b>Humidity:</b>	≤ ±3 % in range 10 - 90 %
<b>Temperature:</b>	± 0,3 °C ± 0.017 * (T - 25°C)
<b>Sensors:</b>	mounted in sensor tube
<b>Sensor tube:</b>	approx. Ø15 mm made of polyamide with screw-type plastic protection cap
<b>Display:</b>	10 mm high LCD-display
<b>Recording interval:</b>	from 4 sec. to 5 h <i>freely programmable via software</i>
<b>Storage capacity:</b>	16.000 measuring values each
<b>Recording time:</b>	166 days (if interval is 15 min.)
<b>Nominal temperature:</b>	25 °C
<b>Working temperature:</b>	-25 to +60 °C
<b>Storage temperature:</b>	-30 to +85 °C
<b>Battery:</b>	CR2032, exchangeable
<b>Battery service life:</b>	over 3 years (if recording interval is 15 min.)

<b>Interface:</b>	serial interface, 3-pin miniature integral plug. <i>The T-Logg 100 is not suitable for bus operation and is not E.A.S.Y.Bus compatible!</i>
<b>Housing:</b>	48,5 x 48,5 x 35,5 mm (H x W x D). plugs, sensor connection, ... are not included Housing made of shock resistant plastic, transparent front made of polycarbonate, splash water-proof: IP 65 (excl. protection cap at T-Logg 160).
<b>Noise immunity (EMC):</b>	the <b>T-Logg 100</b> have been manufactured in accordance with the regulations concerning EMC (2004/108/EG). The device meets EN 61326-1 (table 2, class B), additional error: < 0,5% (< 1% at T-Logg 100 E)

#### Software

##### MINISOFT

Read-out software for the T-Logg.

Software is contained at the USB 100 or free available via the internet ([www.greisinger.de](http://www.greisinger.de)). We will be pleased to send you a separate CD against a small charge covering our expenses of € 16,00.

**Note:** the **T-Logg** can also be controlled by the software **GSOFT40K**.

#### Accessories

<b>USB 100</b>	interface converter, for direct connection of one T-Logg to the USB-interface of a PC.
<b>GWH 40K</b>	Wall suspension with lock against theft (picture: see page 93) suitable for e.g. T-Logg 100, T-Logg 120 K - ... and T-Logg 160.
<b>GWH 10</b>	Simple wall suspension, made of stainless steel (picture: see page 93) Mount wall suspension at the monitoring point, logger may now be easily put in.
<b>CR 2032</b>	spare battery for T-logg's

**TEMPERATURE LOGGER**

for watching production and server-rooms as well as cooling chambers according assignation of frozen food 92/1/EWG



**DIN EN  
12830**

**EASYLog 40K****EASYLog 40KH**

**TEMPERATURE DATA LOGGER** (48.000 meas. values) for any application.

**EASYLog 40K** sensor tube are attached on the device

**EASYLog 40KH** sensor tube are connected via 1 m cable

**EASYLog 40KH-E300** tube con. via cable, increased meas. range (0,1°C)

**EASYLog 40KH-E600** tube con. via cable, increased meas. range (1°C)

**EASYLog 40KH-GOF** with surface probe for pipe mounting

**WPT3 - Certificate of calibration** (not available at ..40KH-GOF)  
(measuring points: -20°C / 0°C / +60°C (at ..40K) or -20°C / 0°C / +70°C (at ..40KH))

**Specification****Measuring ranges:**

**EASYLog 40K:** -30.0 ... 60.0 °C

**EASYLog 40KH:** -50.0 ... 150.0 °C

**EASYLog 40KH-E300:** -50.0 ... 300.0 °C

**EASYLog 40KH-E600:** 0 ... 600 °C

**EASYLog 40KH-GOF:** -50.0 ... 150.0 °C

*For special measuring ranges refer to options*

**Working range** (electronic): -30 ... +60 °C

**Resolution display and memory:**

0.1°C or 1°C (corresponding type)

**Accuracy** (at nominal temperature = 25°C):

**EASYLog 40K:** ±0.5°C

**EASYLog 40KH:** ±0.5°C

**EASYLog 40KH-E300:** ±0.5°C ±0.2% of m.v.

**EASYLog 40KH-E600:** ±1°C ±0.2% of m.v.

**EASYLog 40KH-GOF:** ±0.5°C ±0.2% of m.v.

**Sensor:** Pt1000 (2-wire)

- **Design 40K:** (refer upper picture)

sensor tube made of plastic, Ø7 mm, approx. 30 mm long, attached on the device.

(Note: at certificate: stainless steel tube, Ø5 mm, approx. 60 mm long)

- **Design 40KH:** (refer upper picture)

sensor tube made of stainless steel, Ø5 mm, approx. 50 mm long, approx. 1 m silicone cable. Cable with anti-buckling glanding to housing.

- **Design 40KH-E300:** (probe picture below)

sensor tube made of stainless steel, Ø3 mm,

approx. 100 mm long, sleeve Ø5 x 50 mm, approx. 1 m glass silk cable. Cable with anti-buckling glanding to housing.

- **Design 40KH-E600:** (probe picture below)

sensor tube made of stainless steel, Ø3 mm, approx. 100 mm long, sleeve Ø5 x 50 mm, flexible coating-element, approx. 1 m silicone cable. Cable with anti-buckling glanding to housing.

- **Design 40KH-GOF:** (without picture)

self-adhesive surface temperature probe with moulded silicone design (type GOF 115 Pt1000 - please refer to page 133)

approx. 2 m PFA-insulated cable. Cable with anti-buckling glanding to housing.

- **Special design types upon request**

**Display:** 10 mm high LCD-display

**Recording interval:** 2 sec. to 5 h  
*free programmable via software GSOFT 40K*

**Storage capacity:** 48.000 measuring values

**Recording time:** 500 days,  
(if recording interval is 15 min.)

**Battery service life:** approx. 6 years (at 15 min)

**Working temperature** (electronic): -30 to +60 °C

**Storage temperature:** -40 to +70 °C

**Interface:** EASYBus-interface

3-pin mini-integral plug.  
Needed connection-cable EBSK01 not included in delivery (see accessories page 93)

*Note: With an according interface converter you can connect 120 logger without having any problems.*

**Housing:** 48,5 x 48,5 x 35,5 mm (W x W x D)  
sensor and plug not included, IP65.

**Noise immunity (EMC):** the **EASYLog** have been manufactured in accordance with the regulations concerning EMC (2004/108/EG).

The device meets EN 61326-1 (table 2, class B) additional error: < 0,5%

**Approvals:** DIN EN 12830

**Options (for extra charge)**

- **DBK: double battery capacity**  
recommended for high measure-rates

- **ALARM: additional alarm-output**  
open-collector output via 4-pole miniature mounting connector (IP65) including 1 m cable. Max. switching power: 28 V, 50 mA

- **AFK: plugable probe-cable**  
4-pole (IP65) miniature mounting connector including assembling of the temperature-probe to the corresponding connection socket

- **SMB: extra measuring range**  
freely selectable between -200...+600°C. The essential probe-adjustment is not included in this price.  
Note: at a measuring span ≤400°C (e.g. ±200°C) a resolution of 0,1°C is possible. Taller ranges have a resolution of 1°C

**PULSE-LOGGER**

for consumption and flow rate measuring, piece counting etc.

**PULSE DATA LOGGER**

(48000 meas. values) for individual use

**EASYLog 40IMP/S**

(type switching contact - with PG-glanding and cable)

**EASYLog 40IMP/T**

(type TTL-signal - with PG-glanding and cable)

**Specification**

**Measuring range:** 0 ... 30000 pulses/cycle

**Resolution:** 1 pulse

**Cycle:** 2 sec. to 5 h,  
*free programmable via software GSOFT 40K*

**Display range:** -1999 to 9999 Digit  
*free programmable*

**Decimal point:** any position

**Input signals:**  
**EASYLog 40IMP/S:** passive volt-free switching contact

**EASYLog 40IMP/T:** active TTL-signal  
(input is not isolated for EASYBus)

**Resolution display and memory:** 1 digit

**Accuracy:** cycle time ±50 msec

**Display:** 10 mm high LCD-display

**Recording interval:** equal to cycle

**Storage capacity:** 48.000 measuring values

**Recording time:** 500 days,  
(if recording interval is 15 min.)

**Battery service life:** approx. 6 years (without switching current, at 15 min)

**Working temperature:** -25 to +60°C

**Storage temperature:** -30 to +70°C

**Interface:** EASYBus-interface

3-pin mini-integral plug.  
Needed connection-cable EBSK01 not included in delivery (see accessories page 93)

**Housing:** 48,5 x 48,5 x 35,5 mm (L x B x H)  
plug and cable not included, IP65

**Electric connection:** (for input signals)  
approx.. 0.5m connection cable, flying leads

**Noise immunity (EMC):** the **EASYLog** have been manufactured in accordance with the regulations concerning EMC (2004/108/EG).

The device meets EN 61326-1 (table 2, class B) additional error: < 0,5%

**Options (for extra charge)**

- **DBK: double battery capacity**  
recommended for high measure-rates

- **ALARM: additional alarm-output**  
open-collector output via 4-pole miniature mounting connector (IP65) including 1m cable. Max. switching power: 28V, 50mA

## HUMIDITY-/TEMPERATURE-LOGGER

for museums, greenhouses, medicine technology etc.



**EASYLog 24RFT**

**EASYLog 24RFT-E**

**HUMIDITY / TEMPERATURE DATA LOGGER**  
(48.000 measuring values each) for climate monitoring.

## EASYLOG 24RFT

## EASYLOG 24RFT-E

**WPF4 - Certificate of calibration humidity** (measuring points: approx. 20/40/60/80%)

### Specification

#### Measuring range, Display ranges:

**Humidity:** 0,0 ... 100,0 %RH  
**Temperature:** -25,0 ... 60,0 °C

#### Resolution display and memory:

0.1 °C and 0,1 %RH

#### Accuracy (at nominal temperature = 25°C):

**Humidity:** ≤ ±3 % in range 11-90%  
**Temperature:** ±0,5°C

#### Sensors:

high-quality capacitive polymer humidity sensor and Pt1000 temperature sensor

#### Sensor tube:

**EASYLog 24RFT:** Ø15mm made of polyamide  
**EASYLog 24RFT-E:** approx. Ø14 x 68mm made of PVDF, connected to logger via 1m teflon cable

#### Protection cap:

screw-type plastic protection cap for quick responses

#### Display:

LCD-display, 10 mm high

#### Recording interval:

4 sec. to 5 h  
*free programmable via software GSOFT 40K*

#### Storage capacity:

48.000 measuring values each channel

#### Recording time:

500 days,  
(if recording interval is 15 min.)

#### Battery service life:

approx. 6 years (at 15 min)  
*double battery capacity against upcharge available!*

#### Working temperature:

-25 to +60°C

#### Storage temperature:

-30 to +70°C

#### Interface:

EASYBus-interface  
3-pin mini-integral plug.

Needed connection-cable EBSK01 not included in delivery (see accessories page 93)

*Note: With an according interface converter you can connect 120 logger without having any problems.*

#### Housing:

48,5 x 48,5 x 35,5 mm (H x W x D) sensor and plug not included. Housing made of shock resistant plastic, transparent front made of polycarbonate, splash water-proof: IP 65 (excl. protection cap)

**Noise immunity (EMC):** the **EASYLOG** have been manufactured in accordance with the regulations concerning EMC (2004/108/EG). The device meets EN 61326-1 (table 2, class B) additional error: < 0,5%

### Options (for extra charge)

#### - DBK: double battery capacity

recommended for high measure-rates

#### - ALARM: additional alarm-output

open-collector output via 4-pole miniature mounting connector (IP65) including 1m cable. Max. switching power: 28V, 50mA

### Accessories (p.r.t. page 76, 78/79)

#### EBW 1

Level converter for connection of up to 9 EASYBus data logger to the RS232-interface of a PC. (Power supply: 230V/50Hz)

#### EBW 3

Level converter for connection of one EASYBus data logger to the USB-interface of a PC. (Power supply: via USB)

#### GSOFT 40K incl. EBSK01

(connection cable EBSK01 in scope of supply) Windows software for setting of device, data readout and printing of the stored data.  
*(for further description p.r.t. page 90)*

#### EBSK 01

Special connector with approx. 1m cable for the connection of one **EASYLOG**.  
*(note: cable is in scope of supply of the software GSOFT 40K)*

## STANDARD SIGNAL LOGGER

replaces for expensive recorders



**EASYLog 40NS W**

**STANDARD SIGNAL DATA LOGGER**  
(48.000 meas. values) for transducers etc.

**EASYLog 40NS W - ...**  
(with elbow type plug)

**EASYLog 40NS K - ...**  
(with PG glanding and cable)

**Note:** *please specify standard signal desired when ordering*

### Specification

#### Display range:

-1999 to 9999 Digit  
*free programmable*

#### Decimal point:

any position

#### Input signals:

**one signal only!**  
0 - 2 V, 0 - 10 V, 0 - 20 mA or 4 - 20 mA  
other input signals upon request  
*(input is not isolated for EASYBus)*

#### Accuracy:

±0,5% (at nom. temperature)

#### Display:

10 mm high LCD-display

#### Recording interval:

2 sec. to 5 h  
*free programmable via software GSOFT 40K*

#### Storage capacity:

48.000 measuring values

#### Recording time:

500 days,  
(if recording interval is 15 min.)

#### Battery service life:

approx. 6 years (at 15 min)

#### Working temperature:

-25 to +60°C

#### Storage temperature:

-30 to +70°C

#### Interface:

EASYBus-interface

3-pin mini-integral plug.

Needed connection-cable EBSK01 not included in delivery (see accessories page 93)

#### Housing:

48,5 x 48,5 x 35,5 mm (L x B x H)  
(with elbow-plug: 48,5 x 48,5 x 35,5 mm), splash water-proof IP65

#### Electric connection: (for input signals)

**... 40NS W:** elbow-plug in accordance with EN 175301-803/A for connection to an existing transmitter.

**... 40NS K:** approx. 0.5 m connection cable

**Noise immunity (EMC):** the **EASYLOG** have been manufactured in accordance with the regulations concerning EMC (2004/108/EG). The device meets EN 61326-1 (table 2, class B)

additional error: < 0,5%

### Options (for extra charge)

#### - DBK: double battery capacity

recommended for high measure-rates

#### - ALARM: additional alarm-output

open-collector output via 4-pole miniature mounting connector (IP65) including 1m cable. Max. switching power: 28V, 50mA

**Attention:** Our software GSOFT40K as well as a level converter (EBW1, EBW3, EBW64 or EB2000MC) are required for all EASYLog devices for configuration and to read-out logger data. (p.r.t. p. 93 a. 96)

## STATE-LOGGER

for state monitoring etc.

E.A.S.Y.Bus  
- Modul



**STATE DATA LOGGER**  
(48000 meas. values) for individual use

### EASYLog 40BIN

#### Specification

**Input signal:** passive volt-free switching contact

(input is not isolated for EASYBus)

**Measuring values:**

1 = contact is closed (R < 50 Ohm)

0 = contact is open (R > 20 kOhm)

**Cycle:** 2 sec. to 5 h,  
free programmable via  
software GSOFT 40K

**Resolution display and memory:** 1 digit

**Display:** 10 mm high LCD-display

**Recording interval:** equal to cycle

**Storage capacity:** 48.000 measuring values

**Recording time:** 500 days,  
(if recording interval is 15 min.)

**Battery service life:** approx. 6 years (without  
switching current, at 15 min)

**Working temperature:** -25 to +60°C

**Storage temperature:** -30 to +70°C

**Interface:** EASYBus-interface  
3-pin mini-integral plug.

Needed connection-cable EBSK01 not included  
in delivery (see accessories page 93)

*Note: With an according interface converter  
you can connect 120 logger without having any  
problems.*

**Housing:** 48,5 x 48,5 x 35,5 mm (L x B x H)  
plug and cable not included, IP65

**Electric connection:** (for input signals)  
approx.. 0.5m connection cable, flying leads

**Noise immunity (EMC):** the **EASYLog** have  
been manufactured in accordance with the regu-  
lations concerning EMC (2004/108/EG).

The device meets EN 61326-1 (table 2, class B)  
additional error: < 0,5%

#### Options (for extra charge)

- **DBK: double battery capacity**  
recommended for high measure-rates

- **ALARM: additional alarm-output**  
open-collector output via 4-pole miniature  
mounting connector (IP65) including 1m cable.  
Max. switching power: 28V, 50mA

## HUMIDITY-/TEMPERATURE-/AIR PRESSURE LOGGER

for climate monitoring etc.

E.A.S.Y.Bus  
- Modul



**HUMIDITY - / TEMPERATURE - / PRESSURE - DATA LOGGER**  
(each 250.000 measured values) for climatic applications.

### EASYLog 80CL

**WPF4 - Certificate of calibration humidity** (measuring points: approx. 20/40/60/80%)

**WPD5 - Certificate of calibration pressure** (measuring points 300/500/700/900/1100 hPa)

#### General

The **EASYLog 80CL** can be configured, started and stopped by its buttons. It is possible to record max. 64 recording sequences (=start/stop processes) with max. 250.000 data sets (humidity/temperature/air pressure).

The device can also be configured and handled by the comfortable software GSOFT40K. There is the possibility to block the stopping of the logger by the buttons to protect the logger of unauthorised handling.

The device supports the display of units relevant for the air conditioning technology: wet bulb temperature, dew point temperature, enthalpy, atmospheric humidity or absolute humidity.

The **EASYLog 80CL** provides a big variety of additional functions:

- SeaLevel correction: instead of the barometric air pressure the pressure at sea level can be display (input of height above sea level needed).

- Min-/max- value memory: callable by the buttons, the highest and lowest value since the start (or reset) of the logger is saved here.

- Min-/max- alarm function: the exceeding of adjustable min-/max- alarm boundaries by the displayed value is monitored. Optional: alarm output for alarm message of the logger available!

#### Specification

**Measuring range, Display ranges:**

**Humidity:** 0,0 ... 100,0 %RH

**Temperature:** -25,0 ... +60,0 °C

**Air pressure:** 300,0 ... 1100,0 hPa

**Additional available display ranges:**

Wet bulb temperature: -27,0 ... 60,0 °C

Dewpoint temperature: -40,0 ... 60,0 °C

Enthalpy: -25,0 ... 999,9 kJ/kg

Atmospheric humidity: -0,0 ... 640,0 g/kg

Absolute humidity: 0,0 ... 200,0 g/cm³

**Resolution display and memory:**

0.1 °C, 0.1 %RH and 0,1 hPa or 1 digit

**Accuracy:**

**Humidity:** ± 2 % in range 10-90%

**Temperature:** ± 0,3 °C ± 0.017 \* (T - 25°C)

**Air pressure:** ± 1.0 hPa (typ., at 0 - 60°C)

**Sensoren:**

**Humidity/Temp.:** sensor mounted in sensor tube  
(sensor is exchangeable)

**Air pressure:** sensor integrated in housing

**Sensor tube:** Ø15 mm made of polyamide

**Protection cap:** screw-type plastic protection  
cap for quick responses

**Display:** two 4½-digit LC-displays

**Recording interval:** 4 sec. to 5 h  
free programmable via buttons on the device or  
via the software GSOFT 40K

**Storage capacity:** 250.000 data sets (humidity,  
temperature, air pressure)  
in max. 64 recording sequences

**Recording time:** 7 years (at 15 min. interval)

**Battery service life:** approx. 5 years (at 15 min)

**Working temperature:** -25 to +60°C

**Storage temperature:** -30 to +70°C

**Interface:** EASYBus-interface

3-pin mini-integral plug.

Needed connection-cable EBSK01 not included  
in delivery (see accessories page 93)

*Note: With an according interface converter  
you can connect 60 logger without having any  
problems.*

**Housing:** 48,5 x 48,5 x 35,5 mm (H x W x D)  
sensor and plug not included.

Housing made of shock resistant  
plastic, transparent front made of  
polycarbonate, splash water-proof:  
IP 65 (excl. protection cap)

**Noise immunity (EMC):** the **EASYLog** have  
been manufactured in accordance with the regu-  
lations concerning EMC (2004/108/EG).

The device meets EN 61326-1 (table 2, class B)  
additional error: < 0,5%

#### Options (for extra charge)

- **ALARM: additional alarm-output**  
open-collector output via 4-pole miniature  
mounting connector (IP65) including 1m cable.  
Max. switching power: 28V, 50mA

**Please Note:** For trademark reasons we currently do not deliver members of the **EASYLOG** family to GB and USA. Please order there the constructional identical types: Logger type 40K, Logger type 40RF, ...

# E.A.S.Y.Bus® System

## Principle overview

### Characteristics of the EASYBus system

- Low-cost wiring by using a twisted 2-pin connection line in either bus or tree design (polarity-free); can be used in any combination
- Bus line for simultaneous power supply and signal transmission
- Bus length up to 1000 m, extensible by using a repeater
- Fully automatic start-up installation via software
- Sensor modules can be changed, removed or added during operation at any time
- Connection of up to 240 sensor modules
- Optimum transmission reliability by means of CRC check
- Bus system is able to process data up to 20 measuring values per second
- Response time inside the EASYBus system ca. 1 sec.; but approx. 20 ms by using a local controlling system

### The EASYBus hardware

- 2-pin connection line, based on the principle of the »M-Bus«
- Polarity-free bus connection
- Bus system voltage 36 V DC, minimum 24 V DC
- Maximum allowable bus power loss: 12 V DC
- Master/slave system; data transmission of the slaves only on demand



**Temperature monitoring and regulation:**  
Cooling chambers  
Laboratory + utility rooms  
Storage rooms



**Relative humidity / dew point / temperature monitoring:**  
Storage rooms  
Heating systems / air condition  
Museums / exhibition rooms Libraries  
Laboratories/utility rooms



**Relative humidity / atmospheric pressure, CO<sub>2</sub> monitoring:**  
Manufacturing rooms / storage rooms  
Office rooms (to condition the air of the room) **Greenhouses**




**CO monitoring:**  
Underground garages / Parking garages  
Motorcar garage / car repair  
Indoor go-kart tracks

### Schnittstellen-Konverter

### Zentrale Datenerfassung

### Sensormodule mit Messwertspeicher (Logger-Funktion)

### Sensormodule ohne Messwertspeicher

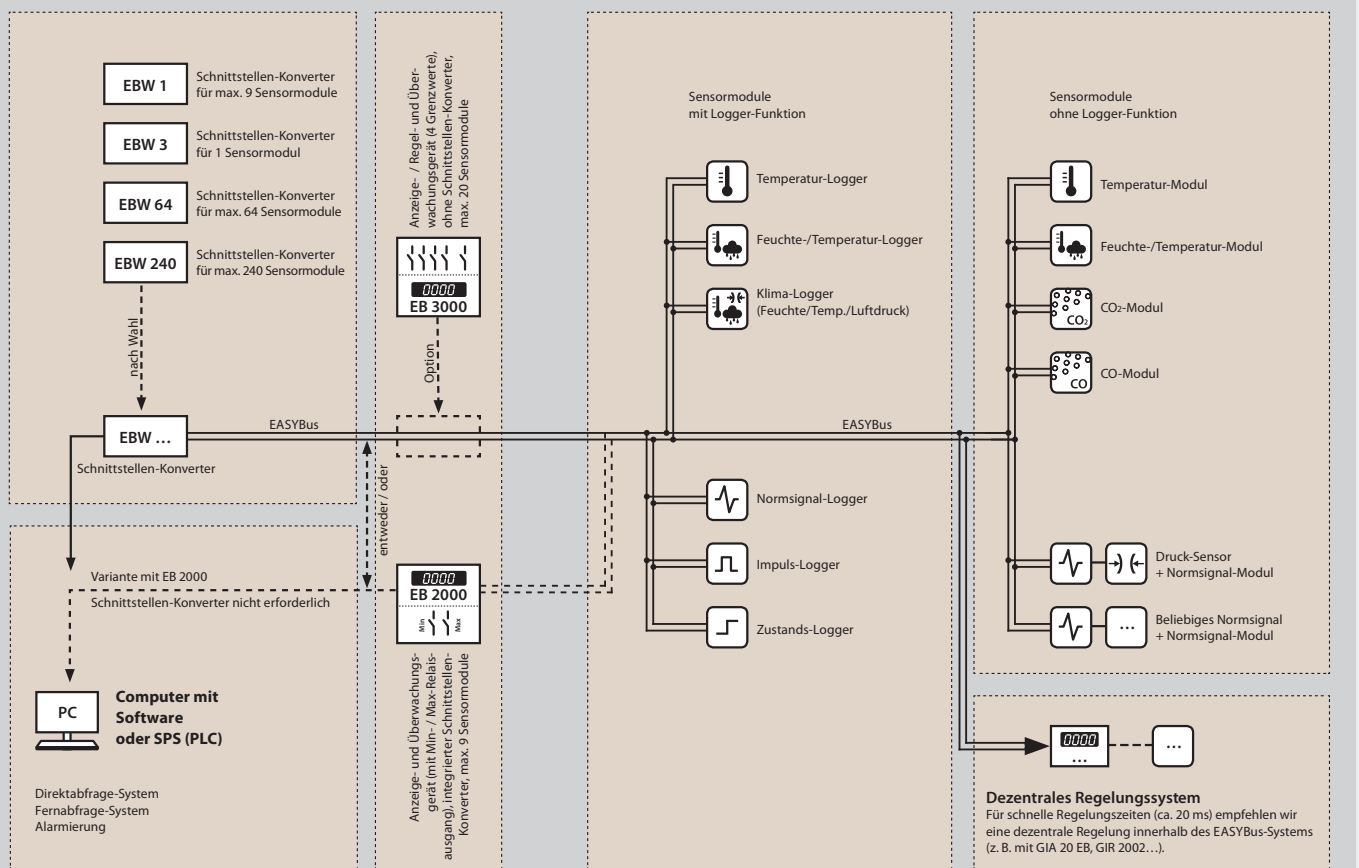




# EASYBus - sensor modules for humidity/temperature

## EBHT - 2R

- VO: Option "On-site display"
- HO: Option "High-humidity sensor (0...100%)", incl. "encapsulated PCB"
- UNI: Option "selectable humidity display unit"

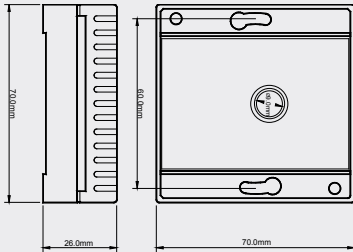

E.A.S.Y. Bus  
- Modul



### Specification

#### Measuring range:

**Humidity:** 0.0 ... 100.0 %RH  
recommended range (standard): 30 ... 80 %RH  
recommended range (option -HO): 5 ... 95 %RH  
**Temperature:** -25,0 ... 70,0°C or -13,0 ... 158,0°F

**Display options:** refer to below

**Resolution:** 0,1 %RH or 0,1°C / 0,1°F

**Accuracy:** (at nominal temperature = 25°C)

**Humidity:** ±2.5 %RH (at recommended range)

**Temperature:** ±0.4 % of meas. value ±0.3°C

**Electric connection:** 2 pin screw-type terminal, no polarity, max. 1,5mm<sup>2</sup>

**Ambient temperature:** -25...50°C

**Housing:** 70 x 70 x 26 mm (L x B x H)


**Option Display:** 10mm high LCD-display

**EBHT - 1R** (sensor tube at the side, FL = 50 mm)

**EBHT - 1K** (sensor tube at the side, FL = 220 mm)

**EBHT - 2K** (sensor tube pointing downwards, FL = 220 mm)

- VO: Option "On-site display"
- HO: Option "High-humidity sensor (0...100%)"
- UNI: Option "selectable humidity display unit"
- LACK: Option "Encapsulated PC-board"
- FL300, FL400, FL500: Option "Longer probe tube"
- KABEL: Option "separated sensor tube", incl. option high-humidity sensor  
Sensor head (Ø14 x 68 mm) connected to housing via approx. 1m teflon cable.
- SHUT: Option "Heat-absorption hat / weather protection shield"  
Avoids falsification of meas. data due to sun/Rain etc - p.r.t. page 108



E.A.S.Y. Bus  
- Modul

EBHT - 1R  
incl. option VO



### Specification

#### Measuring range:

**Humidity:** 0.0 ... 100.0 %RH  
recommended range (standard): 30 ... 80 %RH  
recommended range (option -HO): 5 ... 95 %RH  
**Temperature:** -40,0 ... 120,0°C or -40,0 ... 248,0°F

**Display options:** with option UNI an alternative display unit can be shown instead of the humidity measuring value. The unit selection will be done via the interface or at the keyboard (by option VO).

Wet bulb temperature: -27,0 ... 60,0 °C

Dewpoint temperature: -40,0 ... 60,0 °C

Enthalpiy: -25,0 ... 999,9 kJ/kg

Atmospheric humidity: 0,0 ... 640,0 g/kg

absolute humidity: 0,0 ... 200,0 g/m<sup>3</sup>

**Resolution:** 0,1 %RH or 0,1°C / 0,1°F

**Accuracy:** (at nominal temperature = 25°C)

**Humidity:** ±2.5 %RH (at recommended range)

**Temperature:** ±0.4 % of meas. value ±0.2°C

**Electric connection:** elbow-type plug EN 175301-803/A (IP65), output 2-wire connection, max. 1,5mm<sup>2</sup> each, no polarity

#### Ambient temperature:

electronic, housing: -25...50°C

sensor (sensor tube): -40...100°C (for short time up to 120°C)

**Housing:** 82 x 80 x 55 (L x B x H), material: ABS, IP rating: IP65

**Sensor tube:** tube-Ø 14mm, screwable protection cap with stainless steel gauze (105 µm). Total length approx 50 mm or 220 mm (standard)

Optional extended length 300, 400 or 500 mm available. (please specify upon order!)

**Option Display:** 10mm high LCD-display  
The option VO additionally has 3 pushbuttons for calling **min./max. values** and adjustment of measuring parameters (offset and scale correction).

#### For outdoor use:

Option "encapsulated PC board" required. We also recommend using a heat absorption hat (weather protection shield) to avoid falsification of measuring data due to sun/rain etc. (p.r.t. page 104)

### Other types upon request !


#### Spare parts

##### Spare protection cap

with stainless steel gauze (105µ mesh size)  
- for standard and high humidity use

##### Bronze filter

(not for use in high humidity use)

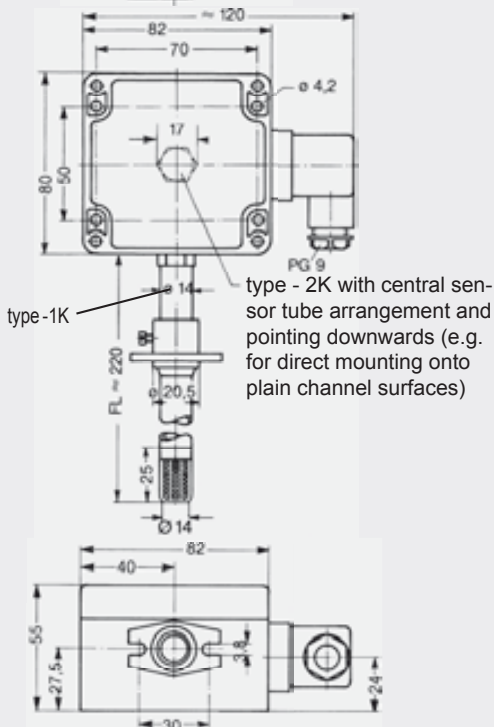


EBHT - 2K



# EASYBus - sensor modules for temperature

## EBT - 2R

**EBT - 2RE** with external sensor for lower or higher temperatures. Sensor: like GTF2000LE on page 122 of catalogue  
**-VO:** Option "On-site display"

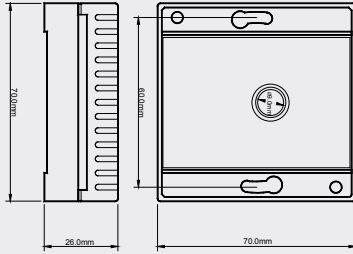

### Specification

#### Measuring range:

**EBT - 2R:** -25,0 ... 70,0 °C or -13,0 ... 158,0 °F

**EBT - 2RE:** -50,0 ... 150,0 °C or -58,0 ... 302,0 °F

**Resolution:** 0,1 °C / 0,1 °F

**Accuracy:** ±0.4% of meas. value ±0.3°C (at nominal temperature = 25°C)

**Sensor element:** Pt1000 acc. to DIN IEC 751

**Electric connection:** 2 pin screw-type terminal, no polarity, max. 1,5mm<sup>2</sup>

**Ambient temperature:** -25...50°C (electronic)

**Housing:** stream-lined housing for indoor installation (can be directly mounted on flush-type sockets)

**Dimensions:** 70 x 70 x 26 mm (H x W x D)

**Sensor (EBT-2RE):** V4A-can, 5mm Ø, 50mm long, approx. 1m silicone cable

**Option Display:** 10 mm high LCD-display

**EBT - AP1** (measuring range:: -50,0 ... +150,0°C) \*

**EBT - AP2** (measuring range:: -50,0 ... +400,0°C) \*

**EBT - AP3** (measuring range:: -50,0 ... +150,0°C) \*

**EBT - AP4** (measuring range:: -50,0 ... +150,0°C) \*

**EBT - AP5** (measuring range:: -199,9 ... +650,0°C) \*






\* observe necessary order information!

**-VO:** Option "On-site display" (LCD with 10 mm high digits)

**-LACK:** Option "Encapsulated PC-board" (for outdoor use)

**-FL...** (Longer probe tube); **-HL...** (longer collar tube):

Price incl. up to 100 mm, extended length: price per 100 mm



### Design types

**Design 1:** With threaded pin „G“ for direct screw connection.

**Design 2:** For higher temperatures, threaded pin „G“ at a distance from housing. HL = collar tube length.

**Design 3:** Indoor or outdoor probe for direct wall mounting (encapsulation of electronics required for outdoor use).

**Design 4:** Duct-type probe with probe tube arranged centrally and pointing downwards.

**Design 5:** Transducer for existing Pt1000 sensors or for applications where probe and housing need to be separated (e.g. extremely high ambient temperature or due to design reasons).

**Other design types upon request - please do not hesitate to contact us !**

### Ordering information

**! at least necessary:**

Type, sensor element and type specific sensor tube data: "FL" and "D" (AP1 - AP4), "G" (AP1, AP2), "HL" (AP2).

**Ordering examples:** all data to be mentioned in any case!

EBT - AP1, G = 1/2", FL = 100 mm, D = 6 mm

EBT - AP3, FL = 50 mm, D = 3 mm

EBT - AP5

### Specification

#### Measuring range:

**- AP1, AP3, AP4:** -50,0 ... 150,0 °C or -58,0 ... 302,0 °F

**- AP2:** -50,0 ... 400,0 °C or -58,0 ... 752,0 °F

**- AP5:** -199,9 ... 650,0 °C or -199,9 ... 999,9 °F

**Sensor element:** Resistance thermometer Pt1000 acc. to DIN IEC 751

**Resolution:** 0,1 °C / 0,1 °F

**Accuracy (electronic):** (at nominal temperature = 25°C) ±0.2% of meas. value ±0.2°C

**Sensor accuracy:** (Pt1000)

Standard: acc. to DIN KI.B (±0,3°C at 0°C)

Option : 1/3 DIN: ±0,1°C at 0°C (upcharge p.r.t. page 121)

**Electric connection:** elbow-type plug EN 175301-803/A (IP65), output 2-wire connection, max. 1,5mm<sup>2</sup> each, no polarity

**Sensor connection:** 2-wire connection available (e.g. EBT - AP5)

**Ambient temperature (electronic):** 0...70°C

**Temperature coefficient:** 0,05%/°C

**Storage temperature:** -20...+70°C

**Housing:** 82 x 80 x 55 (L x B x H), material: ABS, IP rating: IP65

**Mounting position:** any

**Fixing:** by means of screw-thread or fixing holes in the housing (accessible after top cover has been removed).

**Mounting distance:** 50 x 70mm

**Fixing screws:** max. shaft Ø: 4mm

**Sensor mounting:** sensors are electrically insulated as a standard.

**Thread sizes "G":** 1/2" (standard) material V4A G1/4", G3/8", G1/2", M5, M6, M8, M10, M12, other threads upon request!

**Sensor tube:** „D“: 3 mm, 4mm, 5 mm, 6 mm and 8 mm - material: V4A

**Collar tube:** HL = please specify length desired (for ...-AP2 only) (V4A-tube)

**Option Display:** 10 mm high LCD-display  
 The option VO additionally has 3 push-buttons for calling **min./max. values** and **adjustment of measuring parameters** (offset and scale correction).

# EASYBus - sensor modules for temperature

# EASYBus - sensor modules for standardized signals

Handheld instrument


Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

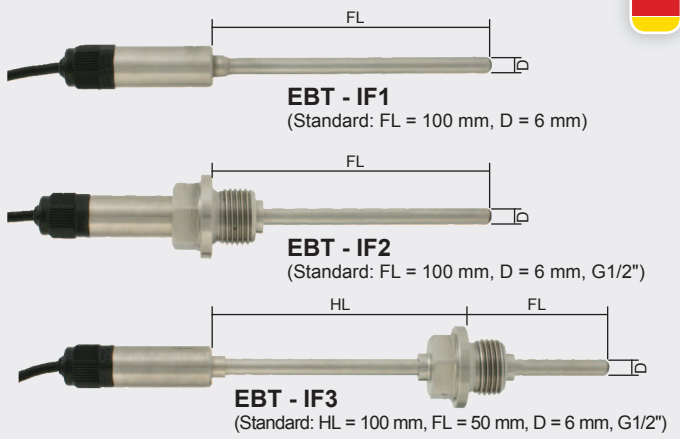

- EBT - IF1
- EBT - IF2
- EBT - IF3



## Specification

**Meas. range:** *The probe length FL has to be chosen long enough, that the allowable temperature range of the electronics situated in the tube sleeve is not exceeded.*

EBT - IF1 (standard): -30,0 ... +100,0 °C  
 EBT - IF2 (standard): -30,0 ... +100,0 °C  
 EBT - IF3 (standard): -70,0 ... +400,0 °C  
*other measuring ranges (max. -200 ... +500°C) upon request*

**Meas. probe:** internal Pt1000-sensor

**Accuracy:** (at nominal temperature = 25°C)  
**Electronic:** ±0.2 % of meas. value ±0.2 °C  
**Measuring probe:** standard: DIN class B  
*optionally higher sensor accuracy available*

**Interface:** EASYBus-interface  
 attached 2-pole cable, cable-length approx. 1m.  
 For direct connection to a converter or to the EASYBus.

**Operating ambient of electronics (in tube sleeve):**  
**working temperature:** -25 to 70 °C  
**relative air humidity:** 0 to 100 %RH

**Housing:** stainless steel housing

**Dimensions:** depending on sensor construction  
**tube sleeve:** Ø15 x 35 mm (without screwing)  
**tube length FL:** 100 or 50 mm *or on customer requirement*  
**tube diameter D:** Ø 6 mm *or on customer requirement*  
 (available Ø: 4, 5, 6 and 8 mm)  
**collar tube length HL:** 100 mm *or on customer requirement*  
**thread:** G1/2" *or on customer requirement*  
 (available threads M8x1, M10x1, M14x1.5, G1/8", G1/4", G3/8", G3/4")

**Min-/max-value memory:** the min-/max-value will be stored  
**Adjusting:** via interface by means of offset and scale values

## Options / upcharges

- FL=...: longer tube, each started further 100mm
- HL=...: longer collar tube, each started further 100mm
- D=...: other tube diameter
- G=...: other thread



EBN / W - ... with elbow-type plug      EBN / K - ... with connection cable



- EBN / K - ...<sup>1)</sup>
- EBN / W - ...<sup>1)</sup>

<sup>1)</sup> - Please specify desired standardized signal upon order: (e.g. EBN / K - 0..10V)

## General

*All standard signals (0-2V, 0-10V, 0-20mA, 4-20mA, others on request) can be acquired on the EASYBus with its current module. When using a according interface converter on the EASYControl net software different transmitters can be connected resp. watched.*

## Specification

**Input signal:** => *specify desired type upon order*  
 0...2V, 0...10V, 0...20mA or 4...20mA.  
*(input is not isolated for EASYBus)*

**Measuring range:** -1999 to 9999 Digit,  
*Measuring range and decimal point can be set via EBxKonfig software. (available free on our homepage).*

**Accuracy:** ± 0.5 % (at nominal temperature)

**Working temperature:** -25 to +60 °C  
**Storage temperature:** -30 to +70 °C

**Interface:** EASYBus-interface  
 attached 2-pole cable, cable-length approx. 1m.  
 For direct connection to a converter or to the EASYBus.

**Housing:** 48,5 x 48,5 x 35,5 mm (H x W x D)  
 (with elbow-type plug: 50,5 x 90 x 39,5 mm),  
 splash-water proof IP65

**Electric connection:** (for input signals)  
 - EBN / K - ....: for connection to standardized signal source via 0.5 m connection cable.  
 - EBN / W - ....: elbow-type plug according to EN 175301-803/A for plug-in into an existing transmitter connection.

## Options / upcharges

- VO: On-site display

# EASYBus - sensor modul for carbon monoxide (CO)



E.A.S.Y. Bus  
- Modul



## EBG - CO - 1R

### Properties

High quality CO transmitter for detection of carbon monoxide in underground garages, parking garages, boiler plants, heating systems, garages as well as in the ambient air.

The CO sensor module has a very long-lasting electrochemical measuring cell and could be easily installed.

#### Range of Application:

- underground garages, parking garages
- boiler plant and heating systems
- motorcar garage

#### Highlights:

- long-lasting electrochemical measuring cell
- automatic zero calibration
- 3 years warranty for the co sensor element

### Specification

<b>Measuring range:</b>	0 ... 300 ppm CO (carbon monoxide)
<b>Measuring principle:</b>	electrochemical, permanent measuring
<b>Reproducibility:</b>	< 3 ppm according to VDI 2053
<b>Response Time T<sub>90</sub>:</b>	< 60 s
<b>Cross sensitivity:</b>	≤ 2% of 300 ppm CO (acc. to VDI 2053)
<b>Linearity error:</b>	≤ 2% of 300 ppm CO (acc. to VDI 2053)
<b>Offset adjustment:</b>	automatically
<b>Interface:</b>	EASYBus-interface
<b>Auxiliary energy:</b>	14 ... 30 V DC, max. 50 mA
<b>Working condition:</b>	-10 ... +40 °C, 15 ... 95 %RH (non-condensing)
<b>Option: on site display</b>	3½-digit LC-display
<b>EMC:</b>	according to EN 50 081-1, EN 50 082-2 B
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5 mm <sup>2</sup> , wire diameter from 4.5 to 7 mm
<b>Housing:</b>	ABS, 82 x 80 x 55 mm (without elbow-type plug)
<b>Mounting:</b>	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø
<b>Weight:</b>	approx. 200 g

### Options / upcharge

**VO:** on site display

### Accessories

<b>GZ-01</b>	test gas cap GT (for controlled flow with test gas)
<b>GZ-02</b>	gas bottle with 12l test gas: 30 ppm CO
<b>GZ-03</b>	gas bottle with 12l test gas: 300 ppm CO
<b>GZ-04</b>	gas valve unit MiniFlo for gas bottles with 12l
<b>GSN 24</b>	plug-in power supply (230V <sub>AC</sub> => 24V <sub>DC</sub> /300mA)

*additional accessories upon request*

# EASYBus - sensor modul for carbon dioxide (CO<sub>2</sub>)



E.A.S.Y. Bus  
- Modul



## EBG - CO2 - 1R

### Properties

Due to the fact, that CO<sub>2</sub> is an important indicator for the quality of air in rooms, it's super important to measure the CO<sub>2</sub> content.

The recommended CO<sub>2</sub> limit value for ambient air is 1000 ppm. An exceeding of this limit causes tiredness and a loss of concentration.

The high quality and precise CO<sub>2</sub>-module works according to the infrared principle (NDIR). An auto-calibration procedure compensates aging effects and is responsible for an excellent long term stability of this CO<sub>2</sub>-module.

Additionally, there is a local display which shows beside the actual CO<sub>2</sub> concentration, the minimum and maximum values as well as an optical alarm.

#### Highlights:

- auto-calibration procedure
- auto-calibration procedure
- for surveillance of the recommended CO<sub>2</sub> concentration in ambient air

### Specification

<b>Meas. range:</b>	standard: 0 ... 2000 ppm CO <sub>2</sub> (carbon dioxide) opt. /5000: 0 ... 5000 ppm CO <sub>2</sub> (carbon dioxide)
<b>Measuring principle:</b>	infrared principle (NDIR)
<b>Accuracy:</b>	standard: ±50 ppm ±2 % of meas. value (at 20°C, 1023 mbar) opt. /5000: ±50 ppm ±3 % of meas. value (at 20°C, 1023 mbar)
<b>Interface:</b>	EASYBus-interface
<b>Auxiliary energy:</b>	12 ... 30 V DC, max. 600 mA
<b>Display:</b>	approx. 10 mm high, 4-digit LC-display
<b>Working condition:</b>	-10 ... +50 °C, 5 ... 95 %RH, 850 ... 1100 hPa
<b>Storage condition:</b>	-25 ... +60 °C, 5 ... 95 %RH, 700 ... 1100 hPa
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1.5mm <sup>2</sup> , wire diameter from 4.5 to 7 mm
Terminal assignment:	2 x EASYBus, no polarity 2 x Auxiliary energy
<b>Housing:</b>	ABS, 82 x 80 x 55 mm (without elbow-type plug)
<b>Mounting:</b>	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø 4 mm
<b>Weight:</b>	approx. 225 g
<b>Features:</b>	- min-/max-value memory, - optical alarm, - input of offset and scale for adjusting

### Options / upcharges

**5000:** measuring range: 0 ... 5000 ppm CO<sub>2</sub>

### Accessories

**GSN 24-750** plug-in power supply (230V<sub>AC</sub> => 24V<sub>DC</sub>/750mA)

# EASYBus-display and monitoring device for 20 channels

Front  
48 x 96



E.A.S.Y. Bus  
- Modul

## EB 3000

- Up to 20 sensor-modules or loggers can be connected
- Sensor module supply and data transfer are carried out via one single 2-wire line
- 5 relay outputs (4 x controlling, 1 x alarm)
- Controller functions can be assigned to any channel, e.g.:
  - 4 x two-point-controllers (of 4 sensors)
  - 2 x three-point-controllers (of 2 sensors)
  - 4-way switch (of 1 sensor), ...
- 2 further functions / calculations:
  - average value over more sensors
  - difference of 2 sensors
  - special functions (upon request)
- Alarm monitoring for all connected EASYBus-moduls
- easy configuration via front-side keypad or via interface
- Via serial interface the connected devices can be read or additionally be monitored with a PC.
- Up to 1000m cable-length possible
- Additional connection of a second EB3000 for enlargement

### Specification

- Display range:** -1999 to +9999 digit  
**Resolution:** depending on sensor module used  
**Accuracy:** depending on sensor module used.  
**Sensor modules:** all intelligent EASYBus sensor modules  
**Sensor supply:** via EB 3000  
**max. bus load:** 30 EASYBus standard loads  
**meas. channels:** 20  
**perm. cable length:** 500 m (depending on type of cable and wiring)  
**Switching outputs:** 4 relay outputs (NO), shared input. Outputs can be as signed to any channel
- Switching power:** 230VAC, 5A, ohm resistive load  
**Switching function:** 2-point controller, 2-point controller inverting  
 Switching points and delay for each output freely selectable  
**Alarm output:** 1 relay output (change-over contacts)  
**Switching power:** 230VAC, 5A, ohm resistive load  
**Alarm function:** Common alarm for all sensors.  
**Configuration:** directly on the device or via additional configuration software (supported converter is needed).
- Min./Max. value memory:** from all connected sensor modules the Max. and Min. value are callable via front-side keypad.  
**Calculation-functions:** there are 2 "virtual" channels additionally to the sensor-channels. A calculated value can be displayed here. Possible calculation functions: sensor-deviation, averaging above x sensors, etc.  
**Self diagnosis:** permanent self-diagnosis, diagnosis of all connected sensor moduls to ensure trouble-free function.  
**Display:** main display: LED, 4-digit, 13mm  
 channel display: LED, 2-digit, 7mm  
**Interface:** EASYBus-interface with supported converter (e.g. EBW1) GRS232 compatible, for communication with a PC.


- Housing:** 48 x 96 x 100 mm (H x W x D)  
**Panel cutout:** 43 x 90,5 mm (H x W)  
**Front:** Transparent membrane keyboard IP65. Sealing for housing for installation according to IP65 will have to be ordered separately.  
**Connection:** 2-wire connection in ring-, tree- or star type. No polarity.  
**Connection terminals:** screw-type/plug-in terminals  
**Ambient temperature:** -25 to 50°C (permissible ambient temperature)  
**Voltage supply:** 230V AC 50/60 Hz  
**Power consumption:** approx. 9 VA

## EB 3000 FTR

### Set for Moisture / Temperature Controlling

#### Scope of Supply:

- EB 3000:** monitoring and controlling device (p.r.t. page 88)  
**EBHT - 1R:** temperature / humidity modul (p.r.t. page 84)  
**VSL2P:** 10 m twisted pair cable (p.r.t. page 93)

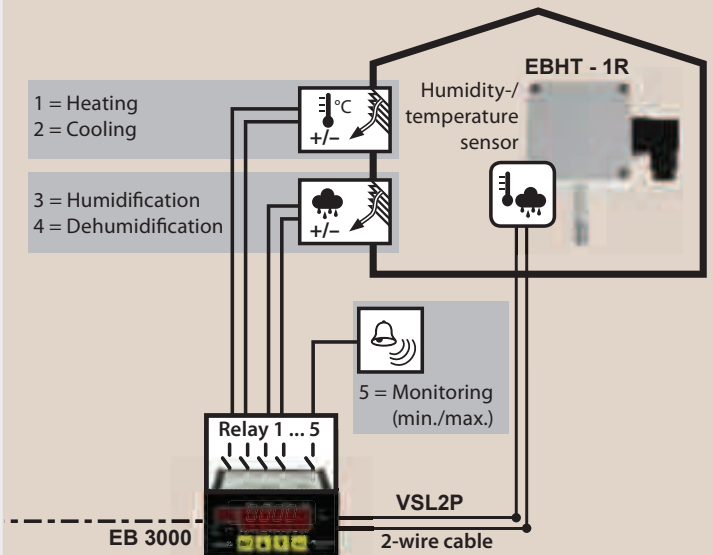

Cost effective monitoring and controlling of temperature and humidity. The humidity- / temperature sensor EBHT-1R will be connected with the EB 3000 via a single 2-wire twisted pair cable (e.g. bell wire). The maximum distance between sensor and controlling device is 500 m.

#### Range of application:

Refrigeration warehouse, green house, storage room, terrarium, etc.

#### Advantages:

- Simple installation and polarity free 2-wire system
- 4 switching outputs (humidify, dehumidify, heating, cooling) and 1 alarm output
- Easy upgrade to 20 single sensors (temperature, humidity, standard signals etc.)
- Excellent cost-performance-ratio

#### Note:

For configuration of the EB 3000 and recording / reading of connected EASYBus modules, a serial converter EBW 1 is needed.

### Accessories

- EBW 1** serial converter EASYBus <=> RS232 further informations p.r.t. p. 92  
**EBS 20M** software for recording and archiving of max. 20 sensor modules (p.r.t. p. 91)

# EASYBus-display and monitoring device for 9 channels

Front  
48 x 96



E.A.S.Y.Bus  
Modul

## EB 2000 MC

- Display and monitor up to 9 sensor modules or loggers.
- automatically detects the number and type of sensor modules connected.
- Sensor module and logger supply as well as data transfer are carried out via one single 2-wire line.
- Monitoring of all sensor and logger functions as well as cable and sensor damage etc.
- 2 volt-free relay outputs for separate min./max. alarm.
- RS232-interface ensures easy configuration
- The EB 2000 MC can be used as a interface converter RS232 - EASYBus so that all EASYBus-moduls connected can be read and configured via the EB 2000 MC.

### Specification

- Measuring range:** -1999 to +9999 digit
- Resolution:** depending on sensor module used.
- Accuracy:** depending on sensor module used.
- Sensor modules:** all intelligent EASYBus sensor modules as well as **EASYLog** (max. 9) can be connected. 2-wire connection in ring-, tree- or star type. No polarity, max. cable length: 200m.
- Sensor supply:** via EB 2000 MC.
- Fault messages:** sensor damage, sensor short circuit, values above/below permissible area.
- Self diagnosis:** const. monitoring to ensure trouble-free function.
- Interface:** RS232 for easy configuration, or as interface converter RS232 - EASYBus.
- Min./Max. value memory:** for up to 9 different sensor modules, selectable via front side keyboard.
- Min./Max. alarm:** 2 volt-free relays (make contact), 10A (ohmic load), 250V, 50/60Hz, for min./max. alarm, programmable via front side button or RS232-interface.
- Alarm delay:** from 0 to 9999 minutes, can be set individually for each channel.
- Display:** 4-digit, red, 13mm high LED-display. 16 additional LEDs for display and monitoring functions.
- Front:** Transparent membrane keyboard IP65. Sealing GGD 4896 for housing for installation according to IP65 will have to be ordered separately.
- Housing:** rack-type housing, 48 x 96 x 100mm (H x W x D).
- Panel cutout:** 43 x 90,5 mm (H x W).
- Connection terminals:** screw-type/plug-in terminals
- Ambient temperature:** 0 to 50°C
- Voltage supply:** 230V AC 50/60Hz (standard)
- Power consumption:** approx. 3,5 VA

### Options / upcharges

- **Voltage supply:** 12V AC, 24V AC or 115V AC 50/60Hz (others upon request)

## EB 3000 / EB 2000 MC cost savings in all areas !

- short installation time - only one 2-pin line.
- polarity must not be observed by installation
- minimum material requirement - only one display and monitoring device for up to 9 / 20 sensor modules
- minimum time requirement for planning and commissioning - automatic sensor module detection, expandable for up to 9 / 20 sensor modules of any type.



### Accessories

#### APG-4

surface-mounted housing (incl. sealing)

#### GGD 4896

add. sealing for panel mounting acc. to IP65

#### EBW 1

interface converter: EASYBus to RS232

#### GRS 01/9

interface adapter RS232: (adapter cable to 9-pin PC-interface)  
(Please note: order Dsub9 -> Dsub25, if required! - GSA 9S-25B)

#### EBSK 01

connection cable 1m, for **EASYLOG**, EBN

#### EBSK 03

connection cable 3m, for **EASYLOG**, EBN

#### VSL 2P

twisted special cable for **EASYBUS**-system, cross section 2 x 0,75 mm<sup>2</sup>

#### AKL 1P

special-branch terminal or connection to VSL2P, 2 pieces

#### EASYBus-Configurator

software for comfortable editing of all EB3000-parameters. (downloadable from our homepage: Service --> Download)

#### Sensor, logger modules

p.r.t. page 83 - 91  
for temperature, humidity, norm. signal, frequency, ...

# GSOFT 40K (incl. connection cable EBSK01)

## Operating software for EASYLOG and T-Logg datalogger

GSOFT40K is the comfortable operation software for the very easy operation of the **EASYLog's** and **T-Logg's**. The software supports English, German and Czech language and is executable with Windows 98, Me, NT, 2000, XP, Vista and 7.

### Comfortable user interface - the essentials on a glance:

The programme is menu driven, the most important commands are additionally available in a toolbar. Whenever necessary the software gives hints and messages. Therefore any user with a few basics about how to operate standard Windows software will be able to operate it. Loggers can be connected, started and read out by single mouseclicks.

### Display of logger state informations



All necessary informations are compressed to a single clearly arranged window for each connected logger.

### Setting of special functions

The loggers are supporting alarm functionality - easily configurable by the GSOFT 40K Software. All other important logger settings are displayed, too. E.g. a label up to 16 characters long can be assigned to each logger channel, which is stored in the logger. You may for example label the location or other useful details by using this function.

### Additional entering of remarks

If You have read out a logger and want to store the data on disk or harddisk there is the possibility to additionally enter remarks of any length for each recording, for example to describe and comment unusual occurrences during the recording.

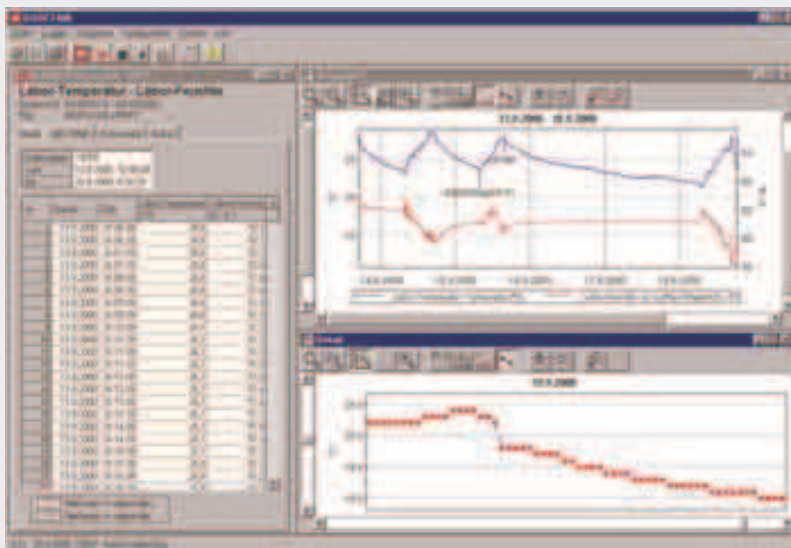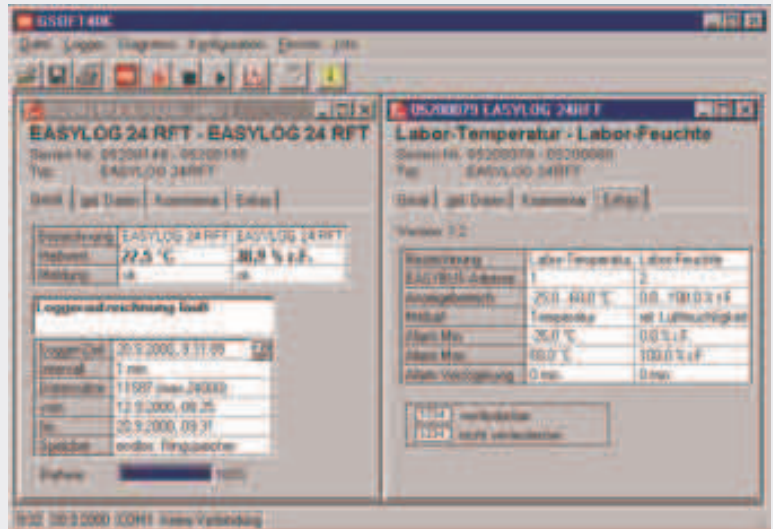

### The data: Tables and diagrams

After reading out the recordings the data will be displayed in form of a table. With the diagram the data of several loggers can be displayed simultaneously. Additional diagram functions:

- labelling of measuring values
- real time axis
- zooming of any section within the diagram
- legend (inactivate able)
- measurement cursor (inactivate able)
- marking of measurings with symbols (inactivate able)

The main target of the design of GSOFT40k was most easiest operationability, therefore just a few easy mouseclicks are necessary to display data fast and clear. Both diagrams and tables are displaying the data in realtime, even daylight savings time settings are taken into account automatically. And of course tables and diagrams can be printed out.

### E.A.S.Y.Bus & simultaneous operation and display of several loggers

Because of the EASYBus more than one logger can be connected at the same time at a single serial PC interface. Distances of up to 1000 m can be covered. To simplify operation all connected loggers can be operated at the same time. This reduces the expense of operation time and even largest EASYBus-systems can be controlled easily.

### Remote operation via conventional and mobile telephone nets

With GSOFT 40K loggers can be operated and read out via any distance by the means of the conventional or the mobile telephone nets. Because of this feature measuring values and recordings can be collected centrally covering distances of hundreds of kilo meters. (p.r.t. page 94)

### Automated Read Out

All loggers connected directly or via conventional an mobile telephone nets can be read out automatically. The points of time can be entered separately (e.g. each day lor each week ... at X.XX o'clock), the read out data will be archived on hard disk. The system gets even more reliable and the handling of multiple loggers gets much easter.

### Export function

To be able to use the logger data with other software applications (EXCEL, WORD,...), a flexible export function is integrated. The data can be converted to textfiles which can be processed by all popular programmes.

### Update GSOFT 40K (for registered users with declaration of serial number of original version)

Update can downloaded freely from our homepage (prerequisite: existence version  $\geq 7.0$ )

# Hand-held instruments - software

Recording - Monitoring - Displaying - Analysing



## EASYControl net

Software solution for recording, monitoring, displaying and analysing of sensor moduls.

### Secured

- User accounts (with secured password transmission).
- Stored data can't be modified or manipulated later

### Live

- Constantly updating data
- Time assignment of the data
- Load ancient data and complete them with „live“ data

### Peripheral

- Uncoupling of data acquisition, data storage and visualisation
- Component communication via LAN
- Data visualisation by local network

### Controlled

- Trigger EBB Out switching channels via EASYBus

### Clear

- Different kinds of visualisation (table, digital, tachometer, chart)
- Display multiple graphs "live" in one chart
- Tooltips (with status information) for each measuring point in the chart
- Blinking symbols on error or status message in the visualisation
- Displaying error- and status messages.
- Displaying min- max- and mean value of the sensors
- Generate reports and store them as PDF, Excel or Word file

### System requirements:

A 32- or 64-bit version of one of the following Windows operating systems: Windows XP, Windows Vista, Windows 7, Windows 8. (not executable with Windows RT, ARM or Intel Itanium based Windows systems)

Long-time monitoring - Recording - Monitoring



## EBS 20M

(20-Channel Measurement Data Logging)

## EBS 60M

(60-Channel Measurement Data Logging)

This software makes up a low-price and comfortable multi-channel acquisition program for measuring data. The program is suitable for recording, monitoring, visualization and documentation.

Simultaneous use of different serial Bus-Systems:  
EASYBus, GMH handheld devices, GDUSB 1000

### Field of application:

- On-site recording
- Process and system control, monitoring of climate and buildings
- Real time monitoring of measuring data  
i.e for data evaluation and logging for cost listings, overview of consumption, optimisation of processes, and other statistics

### Highlight:

- Simultaneous use of several serial interfaces
- Simultaneous use of different serial converters
- Quick and easy installation
- Freely scaleable diagrams and alarm limits
- Visualization of actual measurements values
- Trusted data storage via SQL database
- Data export

### Moduls:

- Large-digit display
- Diagram display
- Table display
- Visualization of alarm limits
- Visualization of all recorded datas in one diagram

### Measuring Cycle:

smallest possible measuring cycle : 500 ms

### System requirements:

A 32- or 64-bit version of one of the following Windows operating systems: Windows XP, Windows Vista, Windows 7, Windows 8. (not executable with Windows RT, ARM or Intel Itanium based Windows systems)

## EASYBus-Configurator free of charge

Software for initial installation and configuration of EASYBus-systems.

- Listing of all connected modules in a treeview, therefore an easy overview of the system is possible.
- configuration of EASYBus modules can be done clearly.

You can download this software from our homepage ([www.greisinger.de](http://www.greisinger.de)) for free.



# EASYBus - interface converter



**EBW 1** interface converter  
for connection of max. 7 EASYBus-modules to the RS232-interface (9-pin Dsub) of your PC.  
Scope of supply: interface converter, 9-pin Dsub extension cable



**EBW 3** interface converter  
for connection of one EASYBus-module (e.g. **EASYLOG**) to the USB-interface of your PC. (Power supply: via USB)  
Scope of supply: interface converter



**EBW 64** interface converter  
for connection of max. 64 EASYBus-modules to the RS232-interface of your PC.  
Scope of supply: interface converter, 9-pin Dsub extension cable



**EBW 240 incl. software EASYControl net**  
interface converter for connection of max. 240 EASYBus-modules to the RS232-interface of your PC.  
Scope of supply: interface converter, plug-in power adapter, 9-pin Dsub extension cable, software EASYControl net.

## Specification:

	EBW 1	EBW 3	EBW 64	EBW 240
Voltage supply:	230 V AC / 50Hz 12/24 V DC on request	not necessary	230 V AC / 50Hz	230 V AC / 50Hz (over power adapter)
Power consumption:	approx. 5 W	max. 0.5 W	approx. 15 W	approx. 30 W
Max. permissible sensor modules *:	7	1	64	240
Permissible cable length **::	200 m	10 m	1000 m	1000 m
Baud rate:	4800 Baud			
Serial connection:	RS232	USB	RS232	RS232
Electrical isolated:	yes	yes	yes	yes
Overload display:	no	no	yes	yes
Short-circuit proof:	yes (limited: 30sec.)	no	yes (passiv)	yes (activ)
Operating temperature:	0 ... 50 °C	-25 ... 50 °C	0 ... 50 °C	0 ... 55 °C
Humidity:	20 ... 80 %RH, non-condensing			
Storage temperature:	-20 ...+70 °C	-25 ...+70 °C	-20 ...+70 °C	-20 ...+60 °C
Dimensions (H x W x D):	112 x 80 x 45 mm	56 x 31 x 24 mm	100 x 75 x 110 mm	200 x 240 x 55 mm (without power adapter)
Bit Recovery	no	no	yes	yes

\* depending on type of the used sensor modules

\*\* depending on type of cable and wiring

## Interface accessories



**USB-Adapter** for connection of an interface converter (except EBW 3) to the USB-interface of your PC

**GSA 9S-25B** connection-adapter: 9-pin Dsub-plug <=> 25-pin Dsub-socket




*Note: the EASYBus-monitoring device **EB2000** can be used as a converter for max. 9 sensor modules.*

# EASYBus - components






## Sensor modules

<b>Logger module</b>	(for temperature, humidity, pressure, norm. signals, frequency)	<i>p.r.t. page 84 - 86</i>
<b>Sensor module</b>	(for temperature, humidity, norm. signals, frequency, ...)	<i>p.r.t. page 88 - 91</i>
<b>GIA 20 EB</b>	EASYBus module for norm. signal and temperature, with 2 switching outputs	<i>p.r.t. page 66</i>
<b>GIA 2000</b>	EASYBus module for norm. signal and temperature	<i>p.r.t. page 69</i>
<b>GIR 2002</b>	EASYBus module for norm. signal and temperature, with 2 relay outputs	<i>p.r.t. page 70</i>
<b>EBB 1 IN</b>	EASYBus sensor module with 1 digital input to monitor a electrically insulated contact	
<b>EBB 4 IN</b>	EASYBus sensor module with 4 digital input to monitor a electrically insulated contact	
	<b>Input:</b> EBB 1 IN: 1 digital input for electrically insulated contact EBB 4 IN: 4 digital input for electrically insulated contact <b>Housing:</b> snap-on housing <b>Dimensions:</b> approx. 22.5 x 78 x 105 mm	


## Logger accessories

	<b>ESK-1</b>	external starting key, independent from mains supply to start logger of the type <b>EASYLOG 40...</b> and <b>EASYLOG 24...</b> in the starting mode St.Et
	<b>GWH 40K</b>	wall suspension with lock as protection against theft suitable for all <b>EASYLOG</b> (except <b>EASYLOG 40NS W</b> ), EBN/K - ..., GIA0420WK and GRA0420WK.
	<b>GWH 10</b>	simple wall suspension, made of stainless steel, suitable for all <b>EASYLOG</b> (except <b>EASYLOG 40NS W</b> ). mount wall suspension at the monitoring point, the logger may now be easily put in.

## Cable

	<b>EBSK 01</b>	special plug with approx. 1 m of cable for connection of one <b>EASYLOG</b> , EBN.. to the EASYBus
	<b>EBSK 03</b>	special plug with approx. 3 m of cable for connection of one <b>EASYLOG</b> , EBN.. to the EASYBus
	<b>EBSK 10</b>	special plug with approx. 10 m of cable for connection of one <b>EASYLOG</b> , EBN.. to the EASYBus <i>(Please note: the <b>EASYLOG</b> will be supplied without connection cable. The GSOFT40K includes a connection cable EBSK01. Please order EBSK01, EBSK03 resp. EBSK10 as required in case of permanent bus connection!)</i>
	<b>VSL 2P</b>	twisted special cable for EASYBus-system, cross section 2 x 0,75 mm <sup>2</sup>
	<b>AKL 1P</b>	special branch terminal for connection to VSL2P, 2 pieces

## Interface converter

<b>EBW 1, EBW 64, EBW 240</b>	EASYBus interface converter, RS232, main supply	<i>p.r.t. page 96</i>
<b>EBW 3</b>	EASYBus interface converter, USB	<i>p.r.t. page 96</i>
<b>GW 110 PB</b>	EASYBus Profibus Gateway 	<i>(further information: <a href="http://www.greisinger.de">www.greisinger.de</a>)</i>

## Interface accessories

<b>USB-Adapter</b>	for converter connection to an USB interface
<b>GRS 01/9</b>	interface cable for EB2000 MC for connection to 9-pin RS232 interface of a PC
<b>GRS 02/9</b>	interface cable for EBW2 for connection to a MODEM ...
<b>GSA 25S-9B</b>	connection-adapter: 25-pin Dsub-plug <=> 9-pin Dsub-socket
<b>GSA 9S-25B</b>	connection-adapter: 9-pin Dsub-plug <=> 25-pin Dsub-socket

## Software

<b>EBS 20M</b>	Windows software for recording and archiving of max. 20 sensor modules	<i>p.r.t. page 95</i>
<b>EASYControl net</b>	Windows software for monitoring, recording, displaying	<i>p.r.t. page 95</i>
<b>GSOFT 40K</b>	Windows software to service the <b>EASYLOG</b>	<i>p.r.t. page 94</i>
<b>ProfiLab-Expert</b>	Windows software	<i>p.r.t. page 62</i>
<b>EASYBUS.dll</b>	Windows-function library for interface communication EASYBus - PC, to integrate in your own programmes	

# EASYBus - components

## Alarm monitoring

### EBUW 232 A independent alarm monitoring module for EASYBus-modules



The EBUW232A monitors independently, it means without additional PC up to 240 EASYBus-modules for their alarm conditions. If an alarm is present, the alarm output of the EBUW 232 A will be set. With the included adapter cable the relay module GNR 232 A can be controlled. Additionally an adequate to the bus connected switching module (EBB .. OUT) can be controlled.

**Power supply:** 6 - 12 V DC, max. 10 mA (connection over approx. 50 cm adapter cable)  
**Switching output:** NPN open-collector, max. switching capacity: 24 V, 50 mA (connection over adapter cable)

### GNG 12 - LE plugin power supply 12 V DC / 300 mA

### GNR 232 A Power supply and relay module for EBUW 232 A



**Power supply:** 230 V, 50/60 Hz  
**Output voltage:** 12 V DC  $\pm 5\%$  (regulated) 25 mA  
**Relay output:** volt-free changeover contacts, switching current max. 10 A ohmic load  
**Connection:** screw-type terminal  
**Dimensions:** 96 x 61 x 60 mm (H x B x T)

### EB 2000 MC EASYBus-display and monitoring device for 9 channels

*p.r.t. page 89*

### EB 3000 EASYBus-display, regulating and monitoring device for 20 channels

*p.r.t. page 88*

## Switching modules

### EBB 2 OUT / BP EASYBus switching module, 2 relay, bus-powered

### EBB 2 OUT / 12V EASYBus switching module, 2 relay

### EBB 4 OUT / BP EASYBus switching module, 4 relay, bus-powered

### EBB 4 OUT / 12V EASYBus switching module, 4 relay




The EBB ... OUT / ... are switching modules for the EASYBus that can be arbitrarily placed on a location in the bus system. The control of the modules' relays is realized by an alarm monitoring module EBUW232A or by PC-software (e.g. EASYControl).

There are 2 different design types of the switching modules:

... / BP: Bus Power - no external auxiliary supply needed

... / 12V: external 12V-supply needed - this allows faster switching and a higher operating reliability due to adjustable preferred relay states in case of a system failure. (*Power supply unit not in scope of supply*)



	EBB 2 OUT / BP	EBB 4 OUT / BP	EBB 2 OUT / 12V	EBB 4 OUT / 12V
<b>Power supply:</b>	Powered by the EASYBus		12 V DC $\pm 10\%$ / 150 mA	
<b>Switching outputs:</b>	2 changers	4 changers	2 changers	4 changers
<b>Switching reaction:</b>	< 1 seconds	< 2 seconds	< 0.1 seconds	< 0.1 seconds
<b>Switching power:</b>	max. 250 V AC / 16 A ohmic load			
<b>Connection:</b>	screw type terminal			
<b>Dimensions:</b>	96 x 48 x 60 mm	96 x 94 x 60 mm	96 x 48 x 60 mm	96 x 94 x 60 mm

## Remote operation




**MODEM 2600** analog hat rail MODEM with alarm input and SMS alarm for the EASYBus remote data transfer via analog telephone nets.

**Scope of delivery:** 1x Modem, 1x plug power supply, 1x TAE cable, 1x protocol converter EBUW232, 1x null modem cable, 1x9-pol. DSub connection cable

**MODEM 3500 GSM** GSM MODEM with alarm input and SMS alarm for the EASYBus remote data transfer via 900MHz mobile nets (D1, D2, etc.).


**Scope of delivery:** 1x Modem, 1x. protocol converter EBUW 232, 1x null modem cable, 1x 9-pol. DSub connection cable

**Accessories:** Antenna GSM (Dual-band industrial antenna with bracket)



**DFM 232 SET** Wireless data connection, 433MHz, consisting of transmitter and receiver for wireless data transmission to EASYBus-modules via 433Mhz radio network.

Bi-directional RS232 interface (DB9), e.g for the connection of EBW 1, large range of up to 1500 m at free air, within buildings similar to DECT telephones.



**LAN 3100** Gigabit Ethernet to USB converter

For inquiring EASYBus modules, GMH handheld devices with interface or GDUSB 1000 via network. 2 USB ports for direct connection of EBW 3, USB 3100N or GDUSB 1000 (up to 15 with USB hub). Connection of EBW 1, EBW 64 or EBW 240 via USB adapter (included to scope of delivery)

Accessories: power supply unit, USB adapter, operation manual, driver CD

# Transmitter

	Measurands											Description	Page
	Temperature	Air humidity	Air flow	Pressure	Carbon monoxide / -dioxide	Oxygen	pH / Redox	Conductivity	Rotational speed	Flow	Level		

## TRANSMITTER

GTMU ..	✓													Wall- or channel-mounted version	100
GTP .. / GNTP	✓													Transmitter board / snap-on housing	102
GTMU - IF ..	✓													Stainless steel housing	103
T03 BU ..	✓													Analog head transmitter	103
RT420 ..	✓													Head transmitter	104
GITT01 ..	✓											✓		programmable head transmitter	105
MU 500 ..	✓											✓		electr. isolated head transmitter, snap-on	106
ST 500 ..												✓		Universal isolating signal converter, snap-on	106
IR-CT 20	✓													Infrared Transmitter	107
TF1 ..	✓													Temperature Switch	107
GRHU .. MP		✓												Wall- or channel-mounted version	108
GHTU .. MP	✓	✓												Wand- oder Kanalausführung	108
GSMU ..			✓											Wall-mounted or Mini version	109
GMUD				✓										Wall mounted version / transmitter board	110
A-10 / S-10 .. / S-11 ..				✓										Stainless steel pressure transmitter	111
GT1-CO / GT10-CO2-1R					✓									Wall-mounted version	112
OXY 36 .. MP						✓								Wall-mounted version	113
GPHU .. / GRMU ..								✓						Wall-mounted version	114
GLMU .. MP									✓					Wall-mounted version	115
EFFI / EFFU										✓				Stainless steel housing	116
EFK2 / EFKP / EFKM											✓			Stainless steel housing	116
RRI - 0.. / ..											✓			Flow meter (with rotor)	117
FCM ..											✓			Flow switch with angle plug	117
FHK.. / EPI											✓			Flow meter with NPN-Output	118
VISION 2008 / VTH 25 ..											✓			Flow transmitter with Hall-effect sensor	119
GBS ..											✓	✓		Water level / well probe	110
GNS ..											✓			Level switch with microswitch / reed contact	119/ 120
RWI ..											✓			Float switch	120
LC .. / GNS-KIT											✓			Level transmitter	121



## GTMU-MP

### General


The new generation of our transducers brings more flexibility thanks to state of the art digital microprocessor technology. Due to the many different design types and a measuring range of -50 ... 400 °C nearly all kinds of applications can covered.

- on site temperature display
- output signal freely scaleable
- user-adjustment possible
- possible output signals: 4-20 mA, 0-1 V or 0-10 V

### Design types

#### Design type 1


for direct screw connection  
probe with threaded stem "G"



Standard type:  
G = 1/2", FL = 100 mm, D = 6 mm

#### Design type 2

for high temperatures  
threaded stem at a distance of HL  
(collar tube) from housing

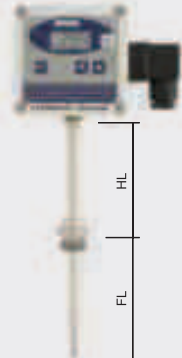

Standard type:  
G = 1/2", HL = 100 mm,  
FL = 100 mm, D = 6 mm

#### Design type 3

indoor / outdoor probe  
for direct wall mounting



Standard type:  
FL = 50mm, D = 3 mm

#### Design type 4

duct probe  
centrally mounted sensor tube pointing  
downwards  
(for clamping ring screw connection p.r.t. page 134)



Standard type:  
FL = 100 mm, D = 6 mm

### Specification

<b>Measuring range:</b>	-50.0 ... +400.0 °C, free scaleable <i>The probe length FL has to be chosen long enough, that the allowable temperature of the case and the electronics of 70°C is not exceeded !</i>
<b>Accuracy:</b> (at 25°C)	electronic: ±0.4% of meas. value ±0,2°C output signal: ±0.2% f.s.
<b>Probe:</b>	PT1000, 2-wire, DIN class B (standard) <i>optional higher sensor accuracy available (p.r.t. page 121)</i>
<b>Output signal:</b>	standard: 4-20 mA (2-wire), freely scaleable option: 0-1 V, 0-10 V (other output signals upon request)
<b>Connection:</b>	4 - 20 mA (2-wire) for option AV01, AV10: 0 - 1 (10) Volt (3- or 4-wire)
<b>Auxiliary energy:</b>	12 ... 30 VDC or 18 ... 30VDC (for output: 0-...V) 50 V, permanently
<b>Reverse voltage protection:</b>	
<b>Perm. impedance</b> (at 4-20mA):	RA [Ω] = (Uv [V] - 12V) / 0.02 A
<b>Permissible load</b> (at 0-1(10)V):	RL [Ω] > 3000 Ω
<b>Display:</b>	approx. 10 mm high, 4-digit LCD-display
<b>Working temperature:</b>	-25 to 70 °C (electronic)
<b>Storage temperature:</b>	-25 to 70 °C
<b>Relative humidity</b> (electronic):	0 to 95 %RH (non-condensing) <i>If there is a risk of condensation due to temperature changes, please use our encapsulated or lacquered types (option).</i>
<b>Housing:</b>	ABS (IP65)
<b>Probe tube:</b>	stainless steel
<b>Probe length:</b>	for standard length please refer to design type, any other tube length possible <i>The probe length FL has to be chosen long enough, that the allowable temperature of the case and the electronics of 70°C is not exceeded !</i>
<b>thread "G":</b>	G1/2" (standard), optional: G1/4", G3/8", G3/4", M10, M12, M14, M16
<b>Probe diameter "D":</b>	3, 4, 5, 6 or 8 mm
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65)
<b>Mounting:</b>	4 housing holes for wall mounting or by means of plastic tube clamps for duct mounting
<b>Functions:</b>	min-/max-value memory, offset and slope digital adjustable, output signal freely scaleable (without tools)

### Prices - temperature transducer

- GTMU - MP design type 1
- GTMU - MP design type 2
- GTMU - MP design type 3
- GTMU - MP design type 4

### Options / upcharges

- AV01: output signal 0-1V
- AV10: output signal 0-10V
- LACK: encapsulated PC board  
*(for outdoor application, i.e. applications where condensation is possible)*
- FL=...: longer tube, each started further 100 mm
- HL=...: longer collar tube, each started further 100 mm
- D=...: other probe diameter
- G=...: other thread

### Accessories

Clamping ring screw connection **please refer to page 136**

### Ordering information

If no additional data is added to the design type, the probe will be manufactured with standard dimensions.  
If different dimensions are needed, they have to be specified.

### Ordering examples:

- GTMU-MP, type 1
- GTMU-MP, type 3, FL = 100 mm, D = 4 mm

# Temperature transducer GTMU








cpl. with Pt100 or NiCr-Ni (type K) sensor



## General

You can choose between 5 design types of the GTMU and 2 sensor types to get an optimised solution for Your needs.

The types 1 - 4 are supplied cpl. with sensor, measuring transducer etc., calibrated and thus ready for use. Type 5 does not include sensor which is either already existing at your works or will have to be ordered separately acc. to your specifications (p.r.t. pages 128-129, 132-133)

design type 1	design type 2	design type 3	design type 4	design type 5
for direct screw connection	for high temperatures	indoor / outdoor probe	duct probe	for external probes
				
probe with threaded stem "G"	threaded stem at a distance of HL (collar tube) from housing	for direct wall mounting	centrally mounted sensor tube pointing downwards. <i>(for clamping ring screw connection p.r.t. page 136)</i>	measuring transducer for Pt 100 or NiCr-Ni sensors already existing on site or for applications where sensor and housing need to be spaced. <i>(e.g. due to extremely high ambient temperatures or to design reasons).</i>
<b>Standard:</b> G = 1/2", FL = 100 mm, D = 6 mm	<b>Standard:</b> G = 1/2", HL = 50 mm FL = 100 mm, D = 6 mm	<b>Standard:</b> FL = 50 mm, D = 3 mm	<b>Standard:</b> FL = 100 mm, D = 6 mm	

## Specification

### Practical sensor elements:

- resistance thermometer: Pt100 class B (higher sensor precision p.r.t. page 123)
- thermocouple: NiCr-Ni class 1

### Max. measuring ranges:

- Pt100: -200 ... +800 °C
- NiCr-Ni: -200 ... +1372 °C

### Standard measurings ranges:

- Pt100: 0...100 °C, 0...200 °C, -50...+50 °C, -50...+150 °C
- NiCr-Ni: 0...100 °C, -50...+150 °C, -200...+300 °C, 0...600 °C, 0...1200 °C
- Optional: any other measuring range against upcharge

### Accuracy electronics: ±0.2% FS (Pt100) or ±0.2% ±0.5°C (NiCr-Ni)

Higher precision e.g. via optionally different transducer (GITT01, RT420)

### Output signal:

- Standard: 4 - 20 mA (2-wire)
- Optional: 0-1 V, 0-2 V, 0-5 V, 0-10 V (3- or 4-wire) *(not available for GITT01, RT420)*

### Auxiliary energy: Uv = 12 ... 30 V DC (at 0-10 V: Uv = 18 ... 30 V DC)

*(for special types GTMU/GITT and GTMU/RT420: 8 ... 30 V)*

### Reverse voltage protection: 50 V permanently

### Allowable burden (for 4-20mA): RA [Ω] = (Uv [V] - 12V) / 0.02 A

*(for special types GITT and RT420 refer to this pages)*

### Allowable load (for 0-\_\_ Volt): RL > 3000 Ω

### Ambient temperature electronics: 0 ... +70 °C (-40...+85 °C at .../RT420 and .../GITT)

### Temperature coefficient: Pt100: 0.01 % / °C

NiCr-Ni: 0.05 % / °C

### Storage temperature: -20 ... +70 °C

### Housing: ABS (IP65)

### Probe tube: stainless steel

### Probe length: optional: for standard length please refer to design type, any other tube length possible

### Thread "G": optional: 1/2" (Standard), G1/4", G3/8", M5, M6, M8, M10, M12

### Probe diameter "D": 3, 4, 5, 6 or 8 mm

### Sensor installation: Pt100: sensors will be electrically insulated at our works. NiCr-Ni: sensors are not electrically insulated as a standard (connection between sensor and outer sheathing). Optional electrically insulated design-type available.

### Mounting: with holes for wall mounting

Mounting distance: 70 x 50 mm (W x H)

Fixing screws: max. shaft-Ø 4 mm

### Electric connection: elbow plug acc. to EN 175301-803/A (IP65)

### Sensor connection: (for type 5) Pt 100: 2- or 3-wire connection possible NiCr-Ni: 2-wire only PG 7 screwed conduit entry for sensor cable connection by screw-type terminal on PC board

## Ordering information

At least necessary ordering information: design type, sensor and meas. range  
If no additional data is added to the design type, the probe will be manufactured with standard dimensions.

### Ordering examples:

GTMU, type 1, Pt100 DIN KL.B., 0...100 °C

GTMU, type 3, NiCr-Ni, 0...1200 °C, FL=100 mm, D=4 mm, POT

## Prices - temperature transducer

### GTMU design type 1

### GTMU design type 2

### GTMU design type 3

### GTMU design type 4

### GTMU design type 5

## Upcharge - transducer options

### GTMU / GITT electrically isolated transducer

*(available sensors: Pt100, Pt1000, NiCr-Ni, only output 4-20 mA possible)*

### GTMU / RT420 transducer for outdoor usage

*(available sensors: Pt100, only output 4-20 mA possible)*

## Options / upcharges

### - AV...: other output signal

*(please state desired output voltage - not available with GITT and RT420)*

### - MB=...: any other measuring range

*(please state desired measuring range)*

*No upcharge for option -AV... -MB if more than 10 pcs per type are ordered.*

### - LACK: encapsulated PC board

*(for outdoor application, i.e. applications where condensation is possible)*

### - POT: electrically insulated NiCr-Ni-probe

### - FL=...: longer tube, each started further 100mm

### - HL=...: longer collar tube, each started further 100mm

### - D=...: other probe diameter

### - G=...: other thread

### - VO: on-site display

*(for output signal 4-20mA, auxiliary energy Uv = 17 ... 30 V DC)*

## Prices - sensor housing without transducer

*We also offer the sensors without the integrated transducer.*

*The sensor connection then are directly connected to the elbow plug.*

### GTMU-OMU design type 1


### GTMU-OMU design type 2

### GTMU-OMU design type 3 or design type 4

*(available sensors: Pt100 (4-wire), Pt1000 (4-wire), NiCr-Ni)*


### GTU-2R-OMU designer housing for ambient

*(available sensors: Pt100 (4-wire), Pt1000 (4-wire))*



*Note: the housing also maybe mounted directly to a concealed distribution box.*

## Temperature-measuring PCB for Pt100 or in snap-on housing

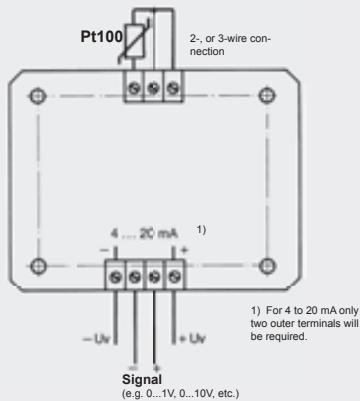

### GTP PCB

### GTP -SG snap-on housing

**Design-type:** PC board completely ready for operation (sensor not included) with any measuring range and any output. 3-pin connection terminal for Pt 100 in 2 or 3-wire technology. Connection terminal for output in 2-, 3-, or 4-wire technology - depending on type desired.

#### Specification :

**Sensor element:** for Pt 100 acc. to DIN IEC 751.  
Suitable sensors available (prepared or unprepared) from stock - please refer to pages 130-131

**Sensor connection:** 2- or 3-wire connection.  
Automatic line resistance compensation for 3-wire connection.

**Measuring ranges:** from -200 to +800 °C  
Standard ranges: GTP 0100: 0 ... 100 °C  
GTP 0200: 0 ... 200 °C  
GTP 5050: -50 ... +50 °C  
GTP 5015: -50 ... +150 °C

OPTION: any measuring range available against upcharge

**Output signal:** 4 - 20 mA (2-wire)  
optionally 0-1 V, 0-2 V, 0-5 V, 0-10 V (3- or 4-wire)

**Auxiliary energy:**  $V_s = 12 \dots 30$  V DC (at 0-10V:  $V_s = 18 \dots 30$  V DC)

**Reverse voltage protection:** 50 V permanent

**Permissible impedance** (at 4-20mA):  $R_A [\Omega] = (U_v [V] - 12V) / 0.02A$

**Permissible load** (at 0-\_\_ Volt):  $R_L [\Omega] > 3000 \Omega$

**Operating temperature electronics:** 0 ... +70 °C

**Temperature coefficient:** 0.01% / °C

**Storage temperature:** -20 ... +70 °C

**Housing:** ABS (IP65)

**Relative atmospheric humidity:** 0 ... 80 % r.h., non-condensing  
Option: encapsulated PC board

**PC board dimensions:** approx. 56,5 x 73 x 20 mm (H x W x D)

**Option snap-on housing:** for top-hat rail (panel mounting),  
Width of housing (pitch) 22,5 mm

**Mounting:** 4 holes, 3,5 mm  $\varnothing$  each  
Mounting distance: 43,5 x 58 mm (W x H)

**Miscellaneous:** potentiometer for zero point and scale

**Electric connection:** screw-type terminals with wire protection and drill holes for testing pin, wire  $\varnothing$  max. 1,5 mm<sup>2</sup>.  
option: screw-type/plug-in terminal

#### Order codes (examples):

**GTP0100 / LACK, SSK:** PCB, 4-20 mA = 0 ... 100 °C, encapsulated PC board, screw-type/plug-in terminals

**GTP -SG / AV010, MB:** -50...+200 °C: snap-on housing, 0-10 V = -50...+200 °C

#### options - upcharges:

**-AV010:** option: output signal 0-10 V

**-AV...:** option: other output signal  
(please state desired voltage)


**-MB:** option: arbitrary measuring range  
(please state desired measuring range)  
No upcharge for option -AV..., -MB if more than 10 pcs. are ordered

**-LACK:** option: encapsulated PC board  
(for outdoor application, i.e. applications where condensation is possible)

**-SSK:** option: screw-type/plug-in terminals  
(not possible for type snap-on housing)

PC board for measuring transducer mounted in water-proof surface-type housing (IP65) p.r.t. type GTMU design-type 5 (page 101)

## Temperature-measuring PCB for NiCr-Ni or in snap-on housing

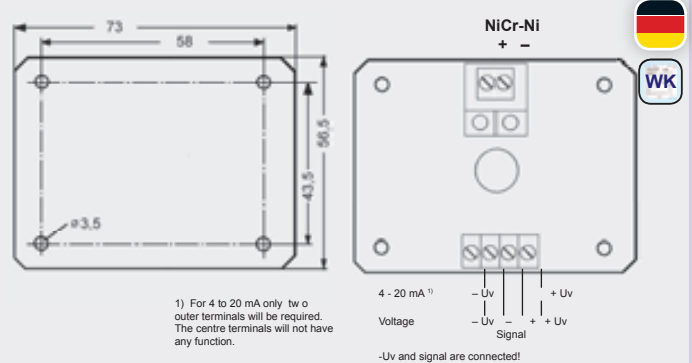

### GNTP PCB

### GNTP -SG snap-on housing

**Design-type:** PC board completely ready for operation (sensor not included) with any measuring range and any output. 2-pin connection terminal for NiCr-Ni-sensor or compensation line. Optionally available: PC board with DIN type flat-pin jack free from thermo voltage for direct plug-in of temperature sensors with DIN type flat-pin plug. Connection terminals for output 2- to 4-pin (depending on output in 2-, 3- or 4-wire technology).

#### Specification :

**Sensor element:** for NiCr-Ni (type K) acc. to DIN IEC 584  
suitable sensor can be supplied custom-designed according to your specifications or in standard design from stock (p.r.t. pages 123-127)

**Meas. range:** from -200 to +1200 °C  
Standard ranges: GNTP 0100: 0 ... 100 °C  
GNTP 0600: 0 ... 600 °C  
GNTP 01200: 0 ... 1200 °C  
GNTP 5015: -50 ... +150 °C  
GNTP 2030: -200 ... +300 °C

OPTION: any measuring range available against upcharge

**Output signal:** 4 - 20 mA (2-wire)  
optionally 0-1 V, 0-2 V, 0-5 V, 0-10 V (3- or 4-wire)

**Auxiliary energy:**  $V_s = 12 \dots 30$  V DC (at 0-5/10V:  $V_s = 18 \dots 30$  V DC)

**Reverse voltage protection:** 50 V permanently

**Permissible impedance** (at 4-20 mA):  $R_A [\Omega] = (U_v [V] - 12V) / 0.02A$

**Permissible load** (at 0-\_\_ Volt):  $R_L [\Omega] > 10 \text{ k}\Omega$

**Operating temperature electronics:** 0 ... +70 °C

**Accuracy electronics:**  $\pm 0,2$  % FS  $\pm 0,5$  °C

**Temperature coefficient:** 0.05% / °C

**Storage temperature:** -20 ... +70 °C

**Relative atmospheric humidity:** 0 ... 80 %RH, non-condensing  
Option: encapsulated PC board

**PC board dimensions:** approx. 56,5 x 73 x 20 mm (H x W x D)

**Option snap-on housing:** for top-hat rail (panel mounting),  
Width of housing (pitch) 22,5 mm

**Mounting:** 4 holes, 3,5 mm  $\varnothing$  each  
Mounting distance: 43,5 x 58 mm (W x H)

**Miscellaneous:** potentiometer for zero point and scale

**Electric connection:** screw-type terminals with wire protection and drill holes for testing pin, wire  $\varnothing$  max. 1,5 mm<sup>2</sup>.  
option: screw-type/plug-in terminal

#### Order codes (examples):

**GNTP / MB: 0...300 °C, LACK, SSK:** PCB, 4-20 mA = 0 ... 300 °C,  
encapsulated PC board, screw-type/plug-in terminals

**GNTP5015-SG / AV: 0-1V:** snap-on housing, 0-1 V = -50 ... +150 °C

#### options - upcharges:

**-AV010:** option: output signal 0-10V

**-AV...:** option: other output signal  
(please state desired voltage)

**-MB:** option: arbitrary measuring range  
(please state desired measuring range)  
No upcharge for option -AV..., -MB if more than 10 pcs. are ordered


**-LACK:** option: encapsulated PC board  
(for outdoor application, i.e. applications where condensation is possible)

**-SSK:** option: screw-type/plug-in terminals  
(not possible for type snap-on housing)

**-TSK:** option: DIN type flat-pin jack free form thermo voltage  
(not possible for type snap-on housing)

PC board for measuring transducer mounted in water-proof surface-type housing (IP65) p.r.t. type GTMU design-type 5 (page 101)

## Temperature transmitter with digital adjustment

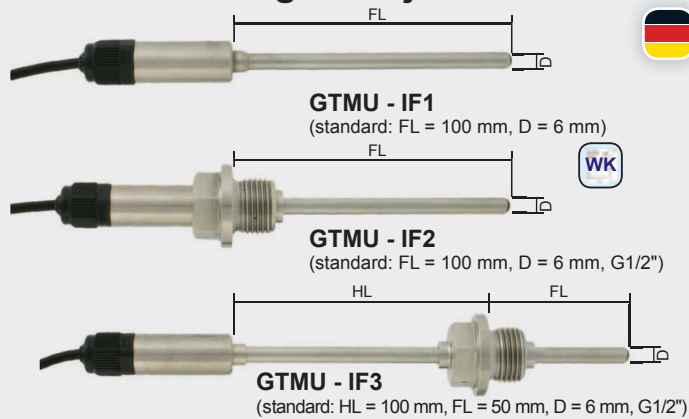

GTMU - IF1

GTMU - IF2

GTMU - IF3

### Specification:

**Meas. range:** The probe length FL has to be chosen long enough, that the allowable temperature range of the electronics situated in the tube sleeve is not exceeded.

GTMU – IF1 (standard): -30,0 ... +100,0 °C

GTMU – IF2 (standard): -30,0 ... +100,0 °C

GTMU – IF3 (standard): -70,0 ... +400,0 °C

**other measuring ranges** (max. -200 ... +500 °C) **upon request**

**Meas probe:** internal Pt1000-sensor

**Accuracy:** (at nominal temperature = 25 °C)

**Electronic:** ±0,2 % of meas. value ±0,2 °C

**Meßfühler:** standard: DIN class B  
optionally higher sensor accuracy available

**Output signal:** 4 ...20 mA (2-wire)

**Auxiliary energy:**  $U_v = 10 \dots 30$  V DC

**Permissible burden:**  $R_A \leq (U_v - 10 V) / 0,022 A$  [ $R_A$  in Ohm,  $U_v$  in V]

**Scaling:** the transducer can be scaled freely within the measuring ranges via GTMU-IF programming tool.

**Operating temperature of electronic** (in tube sleeve): -25 to 60 °C

**Housing:** stainless steel housing

**Dimensions:** depending on sensor construction

**tube sleeve:** Ø15 x 35 mm (without screwing)

**tube length FL:** 100 or 50 mm *or on customer requirement*

**tube diameter D:** Ø 6 mm *or on customer requirement*  
(available Ø: 4, 5, 6 and 8 mm)

**collar tube length HL:** 100 mm *or on customer requirement*

**thread:** G1/2" *or on customer requirement*  
(available threads M8x1, M10x1, M14x1.5, G1/8", G1/4", G3/8", G1/2", G3/4")

**Electric connection:** approx. 1 m long 4-pin cable  
(2 x current loop, 2 x interface)

### Options (upcharges):

- FL=...: longer tube, *each started further 100 mm*
- HL=...: longer collar tube, *each started further 100 mm*
- D=...: other tube diameter
- G=...: other thread
- MB=...: other measuring ranges, set by factory
- M12: electric connection: M12 plug



### Accessories:

#### GTMU-IF - Programming tool

USB-interface adaptor for GTMU-IF, incl. configuration software

## Analog Pt100-transmitter with digital adjustment



### T03 BU /WE \*1 (transmitter 0-10V, set by our works)

\*1 = please specify design-type desired on your order.  
e.g. T03BU, Pt100 3-wire, 0...10 V = 0 - 250 °C

**General:** These transmitter are designed for industrial applications and are used to measure the temperature through Pt100 resistance thermometers in 2-/3-wire circuits connections. The 0...10 V output signal is linear with temperature. The advantages of a continuous analog signal path and those of digital adjustment have been combined in the realization of this transmitter series.

### Specification:

**Measurement input:** Pt100 (DIN EN60751)

**Range limits:** -200 ... +850 °C

**Meas. span:** 40 to 1050 K

**Zero shift:** at span < 75K: -40, -20, 0, 20 or 40 °C  
at span = 75K: ± 50 °C  
at span > 75K: ± (span \* 0,2 + 35 °C)

**Sensor connection:** 2- or 3-wire connection

**Meas. current:** < 0,5 mA

**Max. perm. line resistance** (3-wire): 11 Ohm per conductor

**Sampling time:** continuous because of analog signal path

**Output signal:** 0...10 Volt, 3-wire technology

**Setting time on a temperature change:** ≤ 10 ms

**Transfer characteristic:** linear with temperature

**Transfer accuracy:** ≤ ±0,2 % FS

**Calibration accuracy:** ≤ ±0,2 °C or ±0,2 % FS

**Supply voltage:**  $U_b = 15 \dots 30$  V DC

**Supply voltage error:** ±0,01 % FS / V

**Permissible load  $R_L$ :**  $R_L \geq 10$  kOhm

**Load error:** ≤ ±0,1% FS

**Operating temp.:** -40 ... +85 °C

**Relative humidity:** 0... 95 %RH (non condensing)

**Storage temperature:** -40 ... +100 °C

**Electromagnetic compatibility (EMC):**

conforming to  $\text{CE}$  acc. to DIN EN 61326

**Electric connection:** via terminals,  
cross section of connection terminals max. 1,75 mm<sup>2</sup>

**Housing:** PC-housing, suitable for installation in connection head acc. to DIN 43729 form B.

**Operating position:** unrestricted

**Dimensions:** Ø 44 mm x 21 mm

**IP-rating:** housing: IP54, connection terminals: IP00

**Weight:** approx. 45 g

### Accessories:

#### Rail adapter

(rail adapter for snap-on to top-hat rail)

#### Programming tool for T03BU

The programming tool consists of: configurations software, connection cable USB (approx. 1 m long, 9-pin Dsub-plug)



# Temperature-measuring transducer 4-20mA, Pt100, 2- / 3- or 4-wire

for head and rail case mounting

Panel-mounted-resistance thermometer with measuring transducer RT420



## RT420 - advantages:

- low-price and robust (complete sealed - no pots, therefore vibration resistant and long time stable)
- freely programmable - extreme wide measuring range of -200 to 850 °C (measuring span already from  $\geq 25$  °C)
- selectable probe connection as 2- / 3- or 4-wire
- high accuracy ( 0.1% )
- large ambient temperature range (-40 ... +85 °C)
- error message in case of sensor damage or sensor short-circuit
- functional warranty 5 years

## RT420 / WE \*1

head transmitter, set by our works

## Rail adapter

for snap-on the RT420 to top-hat rail

## RT420 - SG / WE \*1

set by our works and mounted in snap-on rail housing

\*1 = Ordering data required:

1. required probe connection (2- / 3- or 4-wire)
2. measuring range from / to (max. range: -200 ... +850 °C)

Order example: RT420 / WE, 4-wire, 0...50 °C  
RT420-SG / WE, 3-wire, -50...+150 °C



RT420 with rail adapter

## GTF103 / RT420 (p.r.t. page 131)

Panel-mounted resistance thermometer


Pt100 cpl. with measuring transducer RT420 - transducer and Pt100 can be taken out in form of an insert. (Price valid for standard length 100 mm and temperature range as to customers specification between -50 ... +400 °C)

*Special designs upon request - please contact us!*

## GTF103/RT420



RT420-insert with Pt100-sensor of a GTF103/RT420

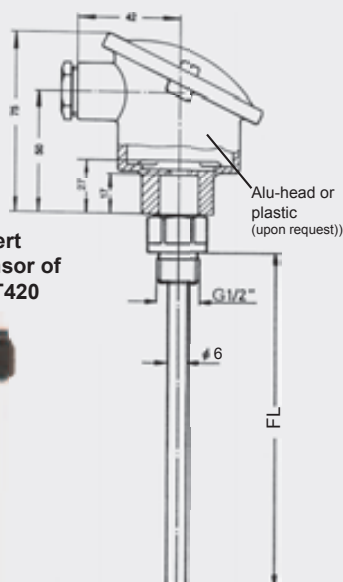

## Specification:

Measuring range:	-200 ... +850 °C, universally programmable
Measuring span:	25 to 1050 K
Zero shift:	-200 ... +825 °C
Resolution:	14 bit
Sensor connection:	2-, 3- or 4-wire connection
Meas. current:	< 0,3 mA
Perm. resistance of connection cable:	max. 20 Ohm / wire
Compensation for cable error:	$\pm 0,02$ K / Ohm (at 3-wire)
Sensor monitoring:	monitoring for sensor damage and short-circuit
Meas. cycle:	< 700 ms
Linearisation:	linear to temperature acc. to IEC/DIN/EN 60 751-2
Accuracy:	$\pm 0,25$ °C or $\pm 0,1\%$ of meas. span
Temperature effect:	< $\pm 0,01\%$ / 1K
Analog output:	4...20 mA, 2-wire technology
Accuracy output:	< 0.1% of signal span
Auxiliary energy: $V_s$	8 ... 35 V DC (max. ripple factor: 3Vss @ 50/60Hz)
Perm. burden $R_A$ :	$R_A \leq (V_s - 8V) / 0,023 A$ [ $R_A$ in Ohm, $V_s$ in V]
Effect of aux. energy:	$\pm 0,01\%$ / V
Power-on time:	10 s
Damping:	adjustable from 0 to 30 s
Output limits:	programmable, 3,5 mA, 23 mA
Signal for sensor damage:	programmable, 3,5 mA or 23 mA
Operating temperature:	-40 ... +85 °C
Relative humidity:	0... 98 %RH, (non condensing)
Storage temperature:	-55 ... +90 °C
Electromagnetic compatibility (EMC):	conforming to $\text{CE}$ acc. to DIN EN 61326
Housing:	housing suitable for head mounting
Dimensions:	$\text{Ø} 44$ mm x 19 mm
IP rating:	Housing: IP40, connection terminals: IP10
Electric connection:	via screw-type terminals
Weight:	approx. 35 g
Design type ...-SG (snap-on rail housing)	
Dimensions:	approx. 22,5 x 78 x 105 mm
Electric connection:	via screw-type terminals
Weight:	approx. 110 g



## Accessories:

### Programming tool for RT420

The configuration set contains: configuration software, connection cable USB, battery plug, connection cable and operating manual

**For easy storage management at customers site (customer programmability - all ranges and wiring options can be fully utilised)**

# Programmable, electrically isolated, 4-20 mA universal transmitter GITT01

GITT01 \*1

GITT01 - Ex \*1

(Ex-protection: ATEX II 1G Ex ia IIC T6/T5 /T4)

\*1=Transmitter can either be programmed by customer or by our works - please specify type upon order.  
(e.g. GITT01, NiCr-Ni (type K), 4...20 mA = 0 - 300 °C)


## Accessories:


### Rail adapter

(rail adapter for snap-on to top-hat rail)

### Programming tool for GITT01

The programming tool consists of: configurations software, connection cable USB (approx. 1m long, 9-pin Dsub-plug)

- universally programmable for
  - resistance thermometers
  - thermocouples
  - resistance sensor
  - voltage sensor
- electrically isolated
- output linear to temperatur
- high accuracy for the entire ambient temperature range (-40 ... 85 °C)
- available with  - protection
- error messages in case of sensor damage or short-circuit, settings acc. to NAMUR NE43
- configuration can be carried out during measuring



## Specification:

**Input signal:** can be universally programmed to

- Resistance thermometer:	max. meas. range	min. meas. span
Pt100 acc. to IEC 751	-200 ... +850 °C	10 K
Pt500 acc. to IEC 751	-200 ... +250 °C	10 K
Pt1000 acc. to IEC 751	-200 ... +250 °C	10 K
Ni100 acc. to DIN 43760	-60 ... +250 °C	10 K
Ni500 acc. to DIN 43760	-60 ... +150 °C	10 K
Ni1000 acc. to DIN 43760	-60 ... +150 °C	10 K
- Thermocouples:		
Type B, PtRh30-PtRh6	0 ... +1820 °C	500 K
Type C, W5Re-W26Re (ASTME 988)	0 ... +2320 °C	500 K
Type D, W3Re-W25Re (ASTME 988)	0 ... +2495 °C	500 K
Type E, NiCr-CuNi	-270 ... +1000 °C	50 K
Type J, Fe-CuNi (acc. to IEC 584)	-210 ... +1200 °C	50 K
Type K, NiCr-Ni	-270 ... +1372 °C	50 K
Type L, Fe-CuNi (acc. to DIN 43710)	-200 ... + 900 °C	50 K
Type N, NiCrSi-NiSi	-270 ... +1300 °C	50 K
Type R, Pt13Rh-Pt	-50 ... +1768 °C	500 K
Type S, Pt10Rh-Pt	-50 ... +1768 °C	500 K
Type T, Cu-CuNi (acc. to IEC 584)	-270 ... + 400 °C	50 K
Type U, Cu-CuNi (acc. to DIN 43710)	-200 ... + 600 °C	50 K
MoRe5-MoRe41	0 ... +2000 °C	500 K
- Resistance-type sensor:	max. meas. range	min. meas. span
Resistance	10 ... 400 Ohm	10 Ohm
Resistance	10 ... 2000 Ohm	10 Ohm
- Voltage sensor:	max. meas. range	min. meas. span
Voltage	-10 ... 100 mV	5 mV

- Resistance-type sensor:	max. meas. range	min. meas. span
Resistance	10 ... 400 Ohm	10 Ohm
Resistance	10 ... 2000 Ohm	10 Ohm
- Voltage sensor:	max. meas. range	min. meas. span
Voltage	-10 ... 100 mV	5 mV

## Resistance thermometer:

**Sensor connection:** 2-, 3- or 4-wire connection

**Meas. current:** ≤ 0,6 mA

**Max. perm. line resistance:** 11 Ohm / line

**Accuracy:** Pt100, Ni100: ±0.2°C or ±0.08% of meas. span  
Pt500, Ni500: ±0.4°C or ±0.16% of meas. span  
Pt1000, Ni1000: ±0.2°C or ±0.08% of meas. span

**Temperature effect:** Td = ± (15ppm/K \* max. meas. range + 50ppm/K \* meas. span)

## Thermocouples:

**Sensor connection:** 2-wire connection

**Sensor current:** < 350 nA


**Accuracy (typ.):** ±0.5K (types: K, J, E, L, U), ±1.0K (types: N, C, D), ±2.0K (types: S, B, R, MoRe5-MoRe41)

**CJC:** Pt100 internal or external (0...80°C)

**CJC accuracy:** ±1°C

**Temperature effect:** Td = ± (50ppm/K \* max. meas. range + 50ppm/K \* meas. span)

<b>Output signal:</b>	4...20 mA or 20...4 mA, 2-wire technology
<b>Linearisation:</b>	temperature linear, resistance linear or voltage linear
<b>Auxiliary energy: V<sub>s</sub></b>	8 ... 30 V DC (max.ripple factor: 5V <sub>ss</sub> for V <sub>s</sub> >13V)
<b>Electr. isolation (E/O):</b>	U <sub>eff</sub> = 2 KV AC
<b>Perm. load R<sub>A</sub>:</b>	R <sub>A</sub> ≤ (V <sub>s</sub> - 8V) / 0,022 A [R <sub>A</sub> in Ohm, V <sub>s</sub> in V]
<b>Supply effects:</b>	≤ ±0.01% / V deviation from 24V
<b>Load effect:</b>	≤ ±0.02% / 100 Ohm
<b>Digital filter:</b>	0 to 60 s, configurable
<b>Switch-on delay:</b>	approx. 4 s
<b>Response time:</b>	1 s
<b>Output limits:</b>	3.8 ... 20.5 mA
<b>Signal in case of sensor damage:</b>	3.6 mA or ≥21.0 mA, configurable
<b>EMC:</b>	Interference immunity and emission acc. to EN 61326-1 and NAMUR NE21
<b>Operating temperature:</b>	-40 ... +85 °C
<b>Climate class:</b>	acc. to EN 60654-1, cl. C; condensation permissible
<b>Vibration strength:</b>	4 g / 2...150 Hz acc. to IEC 60 068-2-6
<b>Electric connection:</b>	via terminals, cross section of connection terminals max. 1.75 mm <sup>2</sup>
<b>Housing:</b>	PC-housing, suitable for installation in connection head acc. to DIN 43729 form B.
<b>Dimensions:</b>	Ø 44 mm x 21 mm
<b>IP-rating</b>	housing: IP54, connection terminals: IP00
<b>Weight:</b>	approx. 40 g
<b>Ex-approved:</b>	ATEX II 1G Ex ia IIC T6/T5 /T4
<b>Power supply set:</b>	U <sub>i</sub> ≤ 30 V DC, I <sub>i</sub> ≤ 100 mA, P <sub>i</sub> ≤ 750 mW C <sub>i</sub> , L <sub>i</sub> = negligibly small
<b>Meas. circuit:</b>	U <sub>o</sub> ≤ 8.2 V DC, I <sub>o</sub> ≤ 4.6 mA, P <sub>o</sub> ≤ 9.35 mW
<b>Max. connection values:</b>	L <sub>o</sub> = 4.5 mH (ia IIC), 8.5 mA (ia IIB) C <sub>o</sub> = 974 nF (ia IIC), 1900 nF (ia IIB)

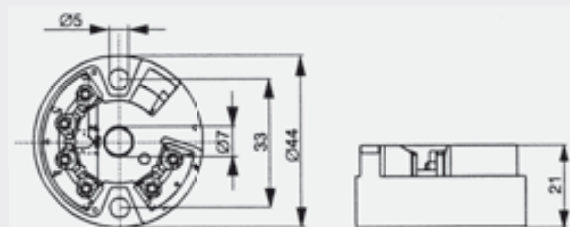

## Temperature transmitter (electrically isolated)



**MU 500-51-...** (Pt100)  
**MU 500-53-...** (Pt1000)  
**MU 500-Ex-51-...** (Pt100)  
**MU 500-Ex-53-...** (Pt1000)

### Properties

- **Electrically isolated: between input / output / supply voltage**
- 2 power-supply-designs with wide range of allowed supply voltage: 10 ... 30 V DC / 10 ... 42 V AC or 85 ... 265 V AC / 110 ... 125 V DC
- 22.5 mm standard case for rail mounting TS35
- Several measuring ranges, selectable via rotary switch at front panel (13 for Pt100, 16 for Pt1000)
- Offset and span adjustable

For Ex-designs:

- Input intrinsically safe ATEX II (1) G [Ex ia] IIC, II (1) D [Ex iaD]
- Burden: max. 1000  $\Omega$



### Specification

**Measuring ranges:** selectable via rotary switch  
 Pt100: -50 ... 0, -50 ... 50, -30 ... 20, -30 ... 70, -20 ... 30, -20 ... 80, 0 ... 50, 0 ... 100, 0 ... 150, 0 ... 200, 0 ... 300, 0 ... 450, 0 ... 600 °C  
 Pt1000: -50 ... 0, -50 ... 50, -30 ... -20, -30 ... -10, -20 ... -10, -20 ... 0, -10 ... 0, -10 ... 10, 0 ... 10, 0 ... 20, 0 ... 30, 0 ... 40, 0 ... 50, 0 ... 100, 0 ... 150, 0 ... 200 °C

**Offset adjust:** offset: approx.  $\pm 8 \Omega$  ( $\pm 20^\circ\text{C}$  for Pt100,  $\pm 2^\circ\text{C}$  for Pt1000)  
 span: approx.  $\pm 20\%$

**Sensor connection:** 2- or 3-wire connection

**Sensor current:** approx. 1 mA (Pt100), approx. 0.25 mA (Pt1000)

**Output signal:** 0 - 20 mA, 4 - 20 mA, 0 - 10 V or 2 - 10 V  
*(selectable via DIP switch)*

**max. load:** burden  $\leq 1 \text{ k}\Omega$  (at mA), load: max. 15 mA (at V)

**Basic accuracy:**  $\leq 0.2\%$  of measuring range

**Temperature coefficient:**  $\leq 0.01\%$  / K

**Output accuracy:**  $\leq 0.1\%$  of measuring range

**Power supply:** ... - 0 - 00 85 ... 265 V AC / 110 ... 125 V DC  
 ... - 5 - 00 10 ... 42 V DC / 10 ... 30 V AC

**Power consumption:** max. 2.2 W / 3.3 VA

**Isolation voltage:** 500 V AC, according to VDE 0110 Gr. 2 between input/output/supply voltage

**Test voltage:** 4 kV DC between input/output/supply voltage

**Working temperature:** -10 .. 60 °C

**Electrical connection:** screw-terminals with pressure plates, max. 2.5 mm<sup>2</sup>

**Dimensions:** 22,5 x 75 x 110 mm (W x D x H)

**Protection:** IP 30 (case), IP 20 (terminals)

**Ex-certification:** TÜV 03 ATEX 2283, II (1) G [Ex ia] IIC, II (1) D [Ex iaD]

**Connection data:**

MU 500-ex-ia-51-...:  $U_0 = 1,3 \text{ V}$ ,  $I_0 < 3 \text{ mA}$ ,  $P_0 < 3 \text{ mW}$ ,  $C_0 = 29 \mu\text{F}$ ,  $L_0 = 100 \text{ mH}$ ,  $C_i = 5 \text{ nF}$ ,  $L_i = 0 \text{ mH}$

MU 500-ex-ia-53-...:  $U_0 = 4,9 \text{ V}$ ,  $I_0 < 3 \text{ mA}$ ,  $P_0 < 3 \text{ mW}$ ,  $C_0 = 2,2 \mu\text{F}$ ,  $L_0 = 100 \text{ mH}$ ,  $C_i = 5 \text{ nF}$ ,  $L_i = 0 \text{ mH}$

### Ordering example

**MU 500-53-5-00:** input = Pt1000, power supply: 10 ... 42 V DC / 10 ... 30 V AC

## Isolating signal converter



**ST 500-Ex-10-0-00** (230 V AC)  
**ST 500-Ex-10-5-00** (10..30 V DC/AC)

### Properties

Isolating signal converter for application in zone 0 or zone 20 (constant explosion risk) with integrated transmitter supply. It allows the direct connection of active 2-wire sensors (4 ... 20 mA) and 3-wire sensors in the Ex-area.

- Input intrinsically safe ATEX II (1) G [Ex ia] IIC, II (1) D [Ex iaD]
- 2 power-supply-designs with wide range of allowed supply voltage: 10 ... 30 V DC / AC oder 85 ... 253 V AC
- Electrically isolated: between input / output / supply voltage
- 22.5 mm standard case for rail mounting TS35
- Universal inputs/outputs for (0)4 ... 20 mA and 0(2) ... 10 V

### Specification

**Measuring ranges:** selectable  
**Current input:** 0 ... 20 mA or 4 ... 20 mA  
 ( $R_i = 25 \Omega$ , max. 100 mA overload)  
**Voltage input:** 0 ... 10 V or 2 ... 10 V  
 ( $R_i = \sim 40 \text{ k}\Omega$ , max. 100 V overload)

**Span:** approx.  $\pm 20\%$ , adjustable

**Transmitter supply:** approx. 20 V DC,  $R_i =$  approx. 300  $\Omega$

**Output signal:** 0 - 20 mA, 4 - 20 mA, 0 - 10 V or 2 - 10 V  
*(selectable via DIP switch)*

**max. load:** burden  $\leq 1 \text{ k}\Omega$  (at mA), load: max. 15 mA (at V)

**Basic accuracy:**  $\leq 0,3\%$  of measuring range

**Temperature coefficient:**  $\leq 0,01\%$  / K

**Repeat accuracy:**  $\leq 0,1\%$  of measuring range

**Rise time:**  $T_{90} < 100 \text{ ms}$

**Power supply:** ... - 0 - 00 85 ... 253 V AC  
 ... - 5 - 00 10 ... 30 V DC / AC

**Power consumption:** max. 3,5 VA

**Isolation voltage:** 500 V AC, according to VDE 0110 Gr. 2 between input/output/supply voltage

**Test voltage:** 4 kV DC between input/output/supply voltage

**Working temperature:** -10 .. 55 °C

**Electrical connection:** screw-terminals with pressure plates, max. 2.5 mm<sup>2</sup>

**Dimensions:** 22,5 x 75 x 110 mm (W x D x H)

**Protection:** IP 30 (case), IP 20 (terminals)

**Ex-certification:** TÜV 97 ATEX 1150, II (1) G [Ex ia] IIC, II (1) D [Ex iaD]

**Connection data:**  $U_0 = 25,2 \text{ V}$ ,  $I_0 = 95 \text{ mA}$ ,  $P_0 = 600 \text{ mW}$ ,  $C_0 / L_0$  (ia/IIC) = 47 nF / 2 mH or 107 nF / 0.2 mH,  $C_0 / L_0$  (ia/IIB) = 370 nF / 15 mH or 430 nF / 1 mH,  $C_i$ ,  $L_i =$  negligible

**The intrinsically safe circuit is electrically isolated from the non-intrinsically safe circuits up to a sum of the peak values of the nominal voltage of 375V.**

# Infrared - measuring transducer IR-CT 20

non-contact temperature measuring from -50 to 975°C



- small infrared sensor heads with 20:1 optical resolution
- rugged and applicable without cooling up to 180°C ambient
- adjustable emission factor
- freely scaleable analogue output
- illuminated liquid crystal display
- **Application:**
  - Glass, paper, plastic industries
  - Automotive industry
  - Metal industry
  - Quality assurance / maintenance

## Precision infrared transducer

### IR-CT 20 -50 ... +975 °C, optic 20:1

**Scope of supply:** electronics-box with LCD, stainless steel sensor head (M12) incl. screw nut, 1m high temperature sensor head cable, manual

#### Specification

**Measuring range:** -50 ... +975 °C  
freely scaleable via programming keys

**Spectral sensitivity:** 8 - 14 μm

**Optic resolution:** 20:1 (precision glass optics)

**System accuracy:** ± 1 % or ± 1 °C  
(higher value applicable)

**Repeat accuracy:** ±0,5 % or ±0,5 °C  
(higher value applicable)

**Nominal temperature:** 23 ± 5 °C

**Temperature coefficient:** 0,05 % or 0,05 °C/K  
(higher value applicable)

**Temperature resolution:** 0,1 °C

**Response time:** 150 ms (95 %)

**Emission-, transmission factor:** adjustable from 0.100 to 1.100

**Output signals:** 0-20mA, 4-20mA, 0-5V, 0-10V thermocouple type J or K

**Output impedance:**  
mA max. 500Ohm (at 8-36VDC)  
V min. 100 kOhm load resistance

**Thermo couple:** 20 Ohm

**Supply voltage:** 8 - 36 VDC

**Power consumption:** max. 100 mA

**Cable length:** 1 m (standard), 3 m, 15 m

**IP rating:** IP65 (NEMA-4)

**Ambient temperature:**  
**Measuring head:** -20 ... +180 °C  
**Electronic box:** 0 ... +65 °C

**Storage temperature:**  
**Measuring head:** -40 ... +180 °C  
**Electronic box:** -40 ... +85 °C

**Relative humidity:** 10 - 95 %RH, non condensing

**Vibration (meas. head):**  
IEC 68-2-6: 3G, 11-200 Hz, each axis

**Shock (meas. head):**  
IEC 68-2-27: 50G, 11ms, each axis


**Weight (meas. head / elec. box):** 40g / 420g

**Dimensions electronic box:** 120 x 70 x 30mm




*Further special design types (e.g. for metal processing, or with other optics) up on request*

#### Optic resolution (standard)

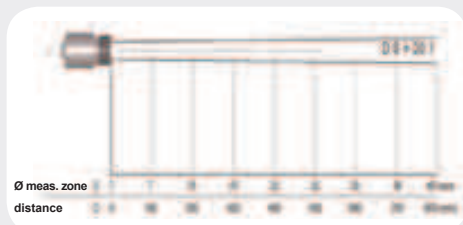

#### Optic resolution (with option CF)

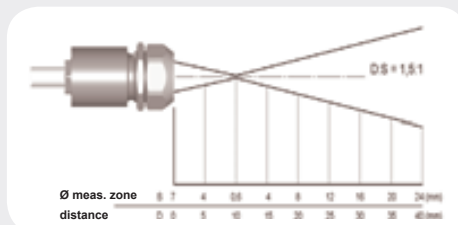

#### Option

- **CB3** 3m sensor head cable
- **CB15** 15m sensor head cable
- **CF** auxiliary lens for measuring of smallest objects measuring zone dia 0,6mm @10mm, in long distance 1,5:1

#### Calibration

- **WPS** calibration certificate 23 °C, 110 °C, 510 °C

#### Mechanical accessories

- **MW** mounting bracket, fixed
- **MB** mounting bolts with M12x1 thread
- **MG** mounting fork, adjustable in 2 axis with M12x1 mount
- **FVS** standard blow clear header
- **FVL** laminar blow clear header

# Temperature Switch



## TF1 ...

#### General

A totally sealed bimetal thermostat opens or closes when the pre-fixed switch value is overrated or undercut.

Sensor has to be fully wetted. Switch value is indicated for increasing temperature 2K/min.

TF1 thermostats just monitor the temperature. A regulation is due to the huge hysteresis not possible.

- optional installation
- compact dimensions
- n.o. or n.c. position
- metering substances: water, gas/air, oil

#### Specifications

##### Switch value: (declared when placing order)

40°C	Order Nr.: TF1 40
50°C	Order Nr.: TF1 50
60°C	Order Nr.: TF1 60
70°C	Order Nr.: TF1 70
80°C	Order Nr.: TF1 80
90°C	Order Nr.: TF1 90
100°C	Order Nr.: TF1 100
110°C	Order Nr.: TF1 110
120°C	Order Nr.: TF1 120
130°C	Order Nr.: TF1 130

**Hysteresis:** 10 ... 20 K

**Accuracy:** ±10 K

**Media Temp.:** max. switch value +50°C


**Connection:** G1/2A male thread socket brass

**Pressure (PN):** 100 bar

**Electr. data:** NO (NC upon request) 250 V AC, 10 A plug EN 175301-803/A

**Weight:** 120 g

**Protection class:** IP65



# humidity and humidity/temperature transducer

## GRHU ... MP and GHTU ... MP



### General

The newest generation of humidity/temperature transducer offers even greater possibilities to compensate the special sensor characteristics due to the newest micro-processor technology. Regarding precision, temperature stability and functionality a new dimension is entered.

The transducer can be used for almost all applications due to the different types (e.g. wall or channel mount, with separated probe or with heat absorption hat) and the wide temperature range (electronic: -25 °C...+50 °C; sensor: -40...+120 °C).

- on-site display for humidity and temperature
- output ranges freely scaleable
- temperature range up to 120 °C
- adjustment by operator possible
- output signals for humidity and temperature are electrically isolated
- available output signals: 4-20 mA, 0-1 V or 0-10 V

### Specification

#### Measuring ranges:

Humidity: 0,0 ... 100,0 %RH (temperature compensated)  
 Temperature: -40,0 ... 120,0 °C or -40,0 ... 248 °F

**Recommended humidity range:** 20,0 ... 80,0 %RH (standard)  
 5,0 ... 95,0 %RH (with option high humidity)

**Display options:** with option UNI an alternative display unit can be shown instead of the humidity measuring value. The unit selection will be done via the interface or at the keyboard.

Wet bulb temperature -27,0 ... 60,0 °C  
 Dewpoint temperature -40,0 ... 60,0 °C  
 Enthalpy -25,0 ... 999,9 kJ/kg  
 Atmospheric humidity 0,0 ... 640,0 g/kg  
 absolute humidity 0,0 ... 200,0 g/m<sup>3</sup>

#### Accuracy: (at 25 °C and in recommended range)

Display: humidity ±2,5 %RH  
 temperature: ±0,4 % of meas. value ±0,2 °C  
 Add. output signal: each ±0,2 % FS

#### Temperature compensation:

automatically

**Output signal:** GRHU 1 x 4-20mA (2-wire), freely scaleable  
 GHTU 2 x 4-20mA (2-wire), freely scaleable  
 option: 0-1V, 0-10V (other output signals upon request)

**Connection:** 4 - 20 mA (2-wire) note for GHTU:  
 output signals are electrically isolated from each other  
 for option AV01, AV10: 0 - 1 (10) VDC (3-wire) note for GHTU:  
 output signals are not electrically isolated from each other

for option AV01G, AV10G: 0 - 1 (10) VDC (3- or 4-wire) note for GHTU:  
 output signals are electrically isolated from each other  
 12 ... 30 VDC or 18 ... 30 VDC (for output 0-10 V)

#### Auxiliary energy:

Reverse voltage protection: 50V, permanently

**Perm. impedance (at 4-20mA):** RA [Ω] = (Uv [V] - 12V) / 0,02 A

**Permissible load (at 0-1(10)V):** RL [Ω] > 3000 Ω

**Display:** approx. 10 mm high, 4-digit LCD-display,  
 alternating humidity and temperature display

**Working temperature:** -25 to 50 °C (electronics)  
 Sensor head and tube: -40 to 100 °C - for short time up to 120 °C

**Storage temperature:** -25 to 70 °C

**Relative humidity (electronic):** 0 to 95 %RH (non-condensing)  
 If there is a risk of condensation due to temperature changes, please use our encapsulated or lacquered types (optionally available).

**Housing:** ABS (IP65)

**Sensor tube:** tube 14 mm Ø, with screw-type protection cap

**Sensor length:** 50 mm (...1R) or 220 mm (...1K, ...2K)  
 option: 300 mm, 400 mm, 500 mm

**Electric connection:** elbow-type plug acc. to EN 175301-803/A (IP65),

**Mounting:** 4 housing holes for wall mounting or  
 by means of plastic tube clamps for duct mounting

**Functions:** min-/max-value memory,  
 offset and slope adjustable,  
 output signal scaleable

### Order code (examples)

GHTU-2K-MP / AV10, FL300: GHTU-2K-MP, 0-10V, FL = 300 mm

GRHU-MP / KABEL, HO: GRHU-MP, with separated sensor tube and high humidity sensor

### Design types

#### Surface mounting

Sensor tube at the side  
 Tube Length: 50mm

Design type: ...-1R

#### Duct mounting

Sensor tube at the side  
 Tube Length: 220mm

Design type: ...-1K

#### Duct mounting

Sensor tube downwards  
 Tube Length: 220mm

Design type: ...-2K



### Prices - humidity transducer

GRHU - 1R - MP (sensor tube at the side, FL = 50 mm)

GRHU - 1K - MP (sensor tube at the side, FL = 220 mm)

GRHU - 2K - MP (sensor tube pointing downwards, FL = 220 mm)

### Prices - humidity / temperature transducer

GHTU - 1R - MP (sensor tube at the side, FL = 50 mm)

GHTU - 1K - MP (sensor tube at the side, FL = 220 mm)

GHTU - 2K - MP (sensor tube pointing downwards, FL = 220 mm)

### Options / upcharges

- HO: High-humidity sensor  
 (for humidity measuring < 20 %RH and > 80 %RH)

Note: Upon ordering the range of application can be stated, for this the device will be optimised free of charge (e.g. 10-40 % or 60-90 %).

- UNI: selectable humidity display unit

- LACK: Encapsulated PC board  
 (for outdoor application, i.e. applications where condensation is possible)

- FL300, FL400, FL500:  
 (Extra long sensor tube - 300, 400 or 500 mm - no interim lengths possible)

- AV01: output signal 0-1V (note: please refer to connection)

- AV01G: output signal 0-1V (note: please refer to connection)

- AV10: output signal 0-10V (note: please refer to connection)

- AV10G: output signal 0-10V (note: please refer to connection)

- KABEL: with separated sensor tube  
 Sensor tube (Ø14x 68mm) connected to device via 1m teflon cable.  
 Inclusive option high-humidity sensor  
 (Ordering note: specifying the design type (e.g. -1R) is unnecessary)

- SHUT: heat absorption hat / weather protection shield  
 (Ordering note: specifying the design type (e.g. -1R) is unnecessary)

#### Application:

The heat absorption hat is especially designed for measurements in the open air. The measuring results that can be achieved will not be influenced by either sun or rain.

#### Design:

Heat absorption hat made of plastic, dia 110 mm, approx. 140 mm high. Additionally equipped with a stainless steel base for wall mounting, with 3 fixing holes for screws with a max. shaft Ø of 5 mm. Large projection approx. 160 mm.



### Spare / accessory parts

Spare protection cap with stainless steel gauze  
 (105µm mesh size) - for standard and high humidity use

Bronze filter (not for use in high humidity)

## Air flow measuring transducer



### GSMU 1020 B5 GSMU 1020 C5

#### Properties

- 3 measuring ranges integrated in each device
- selection between 2 different response times
- high accuracy
- almost independent of flow direction
- shock resistant
- resistant to pollution

#### Application

- air conditioning and ventilation technology
- process and environmental technology

**Measuring principle:** no moving parts. Hot-film anemometer principle.

#### Specification

##### Measuring range flow:

GSMU 1020.: 0...10 m/s, 0...15 m/s and 0...20 m/s  
Measuring range can be set by means of jumper.

**Output signal:** 0 - 10 Volt (I<sub>out</sub> < 1.0 mA) or  
4 - 20 mA (R<sub>i</sub> < 450 Ohm)

Measuring range can be set by means of jumper.

**Measuring accuracy:** (at 20 °C, 45 %RH, 1013 hPa)

GSMU 1020: 0 ... 10 m/s: ± 0,2 m/s ± 3 % of measured value  
0 ... 15 m/s: ± 0,2 m/s ± 3 % of measured value  
0 ... 20 m/s: ± 0,2 m/s ± 4 % of measured value

**Response time:** T<sub>90</sub> (at 10 m/s): typ. 4 s or 0.2 s

Response time can be set by means of jumper.

**Dependency on flow direction:** < 3 % of measured value at Δα < 10°

**Voltage supply:** AC / DC ±20%, max. 150 mA

**max. load:** 500 Ohm

**Connection:** screw-type terminals up to 1.5 mm<sup>2</sup>

**Operating temperature:** -10 ... +50 °C

**Storage temperature:** -20 ... +60 °C

**Housing:** 80 x 80 x 35 mm (H x W x D)

**Material:** ABS

**Protection rating:** IP65 (electronic box)

**Sensor tube:** length = 200 mm (+18 mm for sensor head), Ø 12 mm

GSMU...B5: sensor tube permanently connected to housing

GSMU...C5: sensor tube connected to housing via cable (approx. 1 m long)

*Other tube or cable lengths upon request.*

**EMC:** Conforming to acc. to DIN EN 50081-1 and DIN EN 50082-2

#### Accessories

**GNG 24/150** power supply: 24 V<sub>DC</sub>, 150 mA

**GNT 0520** mains transformer: 230V~ to 24V~,  
with mounting clamp and screw-type terminals.  
Dimensions approx. 62 x 56 x 32.5 mm

## Miniature Air Velocity Transmitter



### GSMU 575

#### Properties

The transmitter is for measuring air velocity. The measurement method is based on the hot-film anemometer principle, for that purpose, a special thin-film sensor element has been developed. An accurate and reliable determination of the air velocity depends on the correct positioning of the sensor probe in the air stream. Accurate measurements are only possible if the sensor probe is installed where there is no turbulence.

#### Application

- heating, ventilating
- air conditioning technology
- supply air control of ovens

#### Specification

**Working range:** 0...20 m/s

other upon request

**Output signal:** 0...10 V (max. 1 mA)

**Accuracy Velocity:** at 20°C / 45 % RH, 1013 hPa, at 1...20 m/s  
1...20 m/s: ±(0,4 m/s + 6% of m.v.)

**Response time:** (bei 10m/s T<sub>90</sub>) typ. 4 s

**Power supply:** 19...29 V<sub>DC</sub>

**Power consumption:** max. 70 mA bei 20 m/s

**Temperature range:** working temperature: -20...60°C

storage temperature: -30...60°C

**Connection:** 0,5 m cable, PVC 3 x 0,25 mm<sup>2</sup>,  
wire end ferrule

**Electromagnetic Compatibility:** EN61326-1

EN61326-2-3

**Housing:** polycarbonate, Lenght: 120 mm, Ø 12 mm

**Protection class:** IP20 (measuring head), IP40 (housing)

#### Accessories

**GNG 24/150** power supply: 24 V<sub>DC</sub>, 150 mA

## Pressure measuring transducer for absolute pressure or over/under pressure and pressure difference



- freely scalable
- change between 4-20 mA / 0-10 V
- with display
- switching output



**GMUD MP-S** (pressure range > 30 mbar)

**GMUD MP-F** (fine pressure range < 25 mbar)

Microprocessor controlled, digital pressure transducer with display and operation via 3 buttons. With freely scalable analog output that can be switched between 4-20 mA and 0-10 V.

**Suitable for:** air and non-aggressive gases

**Area of application:**

- controlling, measuring and monitoring
- climate and ventilation
- environmental and medical technology

**Types of pressure:** Absolute pressure (vacuum used as reference) for measuring over pressure over absolute zero (sensor displaying barometric air pressure when coming into contact with atmospheric pressure). Relative pressure (reference atmosphere or ambient pressure) for over/under pressure measurements and pressure difference measurements (sensor displaying zero when coming into contact with atmospheric or ambient pressure).

**Specification:**

**Sensor element:** piezoresistive pressure sensor with integrated temperature

Relative fine pressure range:	Measuring range	Overload	Burst pressure
MP-F-MR0	0,000 ... 1,000 mbar rel.	150 mbar	200 mbar
MP-F-MR1	0,00 ... 10,00 mbar rel.	150 mbar	200 mbar
MP-F-MR2	0,00 ... 20,00 mbar rel.	150 mbar	200 mbar
Optimized special ranges possible: see option - MBF (e.g. -15 ... +15 mbar)			
Relative pressure range:	Measuring range	Overload	Burst pressure
MP-S-MR0	0,0 ... 100,0 mbar rel.	1000 mbar	1500 mbar
MP-S-MR1	0,0 ... 500,0 mbar rel.	1000 mbar	1500 mbar
MP-S-MR2	0 ... 1000 mbar rel.	2000 mbar	3000 mbar
MP-S-MR3	0 ... 2000 mbar rel.	4000 mbar	6000 mbar
MP-S-MR4	0 ... 5000 mbar rel.	7000 mbar	7000 mbar
Absolute pressure range:	Measuring range	Overload	Burst pressure
MP-S-MA0	0 ... 1100 mbar abs.	2000 mbar	3000 mbar
MP-S-MA1	0 ... 2000 mbar abs.	4000 mbar	6000 mbar
Optimized special ranges possible: see option - MBS (e.g. -350 ... +350 mbar)			

**Typ. accuracy:** GMUD MP-S:  $\pm 0,15\%$  FS (lin.),  $\pm 0,6\%$  FS (hysteresis and temperature 0 ... 70 °C)  
GMUD MP-F:  $\pm 0,35\%$  FS (lin.),  $\pm 0,6\%$  FS (hysteresis and temperature 0 ... 70 °C)

**Output signal:** 4 ... 20 mA / 0 ... 10 V (selectable in menu)  
**Auxiliary energy:** only needed if 0...10 V output signal is selected (18 ... 30 V DC / 24 V AC)  
**Permissible burden:** (4 ... 20 mA):  $R_a[\Omega] = (U_v [V] - 12 [V]) / 0,02 A$   
**Permissible load:** (0 ... 10 V):  $\geq 3000 \Omega$   
**Operating temperature:** -20 ... +70 °C  
**Storage temperature:** -40 ... +70 °C  
**Display / operation:** 4-digit 7-segment display and 3 buttons  
**Pressure connection:** universal pressure connecting pieces for 6 x 1 mm or 8 x 1 mm plastic tubes (4 or 6 mm inner pipe diameter)

**Mounting position:** any position (small influence of mounting position for low ranges)  
**Housing:** ABS (IP65), with fixing holes for wall mounting (accessible after cover has been removed)

**Electric connection:** elbow-type plug acc. to EN 175301-803/A (IP65); max. wire cross section: 1.5 mm<sup>2</sup>, wire/cable Ø: 4.5 mm to max. 7 mm

ordering example:  $\pm 700$  mbar rel. with switching output: GMUD MP-S/MBS: -700 ... +700 mbar, OUT 0 ... 100 mbar rel. with lacquering and switching output: GMUD MP-S-MR0/LACK, OUT

**Options:**

**LACK:** card coated on both sides (for outdoor application)

**OUT:** switching output (max 28 V, 40 mA), switches if meas. value falls below or exceeds limit value connection via 2nd elbow-type plug

**WE:** default settings according to customer's specifications, includes: output signal, measuring range, default state in case of error (without upcharge if together with MBF / MBS)

**MBF:** option any fine pressure range range < 25 mbar please state desired measuring range

**MBS:** option any pressure range range > 30 mbar ... 5000 mbar please state desired measuring range

**Tube and accessories: see page 50-51**

## Water level / well probe Tank contents meas. probe



**GBS 01**

For simple and inexpensive applications. Suitable for permanent level measuring in tanks, rivers, lakes, drinking-water wells, drilling holes, waste water plants...

**GBS 02**

For measuring the level of fuel and other aggressive media. The sensor is highly precise, insensitive to lateral flow and offers optionally lightning protection and other output signals (e.g. 0-10V). For measuring of gasoline please order ex-design.

**Description:** piezoresistive pressure sensor with temperature compensation. Welded, non-corrosive design with integral and additionally sealed water-proof connecting cable. The pressure compensation is done via a cable-integrated air path to the atmosphere. A special feature is the lateral flow resistance, which prevents media ingress. Therefore only the cable has to be replaced in case of a corresponding defect.

**Specification:**

**Meas. ranges:** 0.1 bar (100 mbar) to 25 bar = 1 to 250 m water column

Available ranges:

0.1, 0.25, 0.4, 0.5, 0.6, 1, 1.6, 2.5, 4, 6, 10, 16, 25

Overload (bar):

1 2 2 2 4 5 10 10 17 35 35 80 80

**Output signal:**

4-20 mA (option: 0-10 V only for GBS02)

**Permissible impedance:**

4-20 mA:  $R_A [\Omega] \leq (V_s [V] - 10 [V]) / 0,02 A$

0-10 V:  $R_A [\Omega] > 10 \text{ k}\Omega$

**Auxiliary energy:** 10...30 V DC (14...30 V DC at 0-10 V), others upon request

**Accuracy:**

GBS01: accuracy (% of span):  $\leq 0,5$  (setting of cut-off point) resp.  $\leq 0,25$  (BFSL)

GBS02: accuracy (% of span):  $\leq 0,25$  (setting of cut-off point) resp.  $\leq 0,125$  (BFSL)

(The accuracy of the pressure ranges 0.1 and 0.25 bar correspond with the type GBS01)

Hysteresis (% of span):  $\leq 0,1$

Repeatability (% of span):  $\leq 0,05$

Stability per year (% of span):  $\leq 0,2$  (at reference conditions)

**Operating temperature:** -10...+60 °C

(GBS01) or -10...+85 °C (GBS02)

**Temperature coefficient** (% of span):

$\leq 0,02 / K$  (for meas. range  $\geq 0,4 \text{ bar}$ )

**Filling:** KN77, food safe

**Housing:** chromium-nickel alloy 1.4571.

Male thread G 1/2" accessible after removal of plastic protection cap.

**Probe dimensions:** Ø 27 mm, length of metal body: approx. 100 mm (GBS01), approx. 147 mm (GBS02), cable Ø approx. 7.5 mm

**Electric connection:** 10 m stationary casted PUR cable (GBS01) resp. FEP-cable (GBS02). Glass-fibre screen protects cable against tearing.

(Extra long cable against upcharge - please specify when ordering)

**Options GBS01:**

**extra long connection cable (PUR)**

upcharge per m

**Optionen GBS02:**

**extra long con. cable (FEP, teflon)**

upcharge per m

**lightning protection** upcharge:

**output signal 0-10 V** upcharge:

**Ex-protection** upon request

Handheld instrument

Display / Controller


Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

## Pressure transmitter

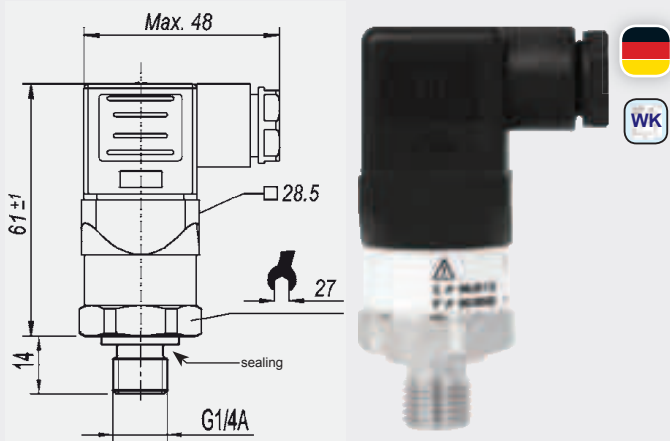

### A-10

(relative pressure, zero output at atmospheric pressure)

#### Option: Absolute Pressure

(0...1bar abs. to 0...25bar abs.)

#### Option: Under Pressure

(-1,0 ... +1,5 bar, -1,0 ... +3,0 bar, -1,0 ... +9,0 bar)

**General application:** Suitable for all applications in machine and systems engineering, automotive technology as well as cooling and air conditioning technology.

#### Specification:

**Measuring range (MR), Overload limit (OL), Burst pressure (BD):**

**MR:** 1, 1.6, 2.5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600

**OL:** 2 3.2 5 8 12 20 32 50 80 120 200 320 500 800 1200

**BD:** 5 10 10 17 34 34 100 100 400 550 800 1000 1200 1700 2400

**Output signal:** 4-20mA, 2-wire, RA [Ω] ≤ (Uv [V] - 8V) / 0.02 A  
0-10V, 3-wire, RA ≥ 10 kΩ  
(other output signals upon request)

**Auxiliary energy:** 8 ... 30 VDC (for output 4-20 mA)

14 ... 30 VDC (for output 0-10 V)

**Accuracy:** \* ≤ 1,0 % FS (optional: ≤ 0,5 % FS)

(\* = including non-linearity, hysteresis, zero point and scale error. Corresponds to error of measurement per IEC 61298-2. Sensor adjusted in vertical mounting position with lower pressure connection)

**Non-Linearity:** ≤ 0,5 % FS (optional: ≤ 0,25 % FS)

**Zero Offset:** ≤ 0,5 % FS (typ.), ≤ 0,8 % FS (max.),  
(optional: ≤ 0,15 % FS (typ.), ≤ 0,4 % FS (max.))

**Hysteresis:** ≤ 0,16 % FS

**Repeatability:** ≤ 0,1 % FS

**Long-term drift:** ≤ 0,1 % FS (according to IEC 61298-3)

**Response time:** T<sub>90</sub> ≤ 4 ms

**Perm. temperature of meas. media:** 0 ... +80 °C (optional: -30 ... +85 °C)

**Ambient temperature:** 0 ... +80 °C (optional: -20 ... +80 °C)

**Storage temperature:** -20 ... +80 °C

**Temperature compensated area:** 0 ... +80 °C

**Temperature error in comp. area:** ≤ 1,0 % FS (typ.), ≤ 2,5 % FS (typ.)

**Material:** Parts coming into contact with pres. media

- Pressure connection: 316 L

- Pressure sensor: 316 L (as of 10bar rel. 13-8 PH)

Housing: 316 L

**Pressure connection:** G 1/4 A, DIN 3852-E with NBR sealing

**Protection rating:** IP65 resp. IP67 with cable

**Electric connection:** elbow-type plug acc. to EN 175301-803/A or connection cable, cable length 2m

**Electric protections:** reverse voltage and short-circuit protection

**Weight:** approx. 80 g

#### Options, Accessories:

Higher sensor accuracy (class 0,5)

Extended temperature range


Output signal 0-10 V

Fixed connecting cable, 2 m with bend protection (instead of elbow-type plug, IP67)

GWA1214 V4A thread adapter G 1/2"

with internal thread G 3/4" and external thread G 3/2"

## Pressure measuring transducer for over/under and absolute pressure

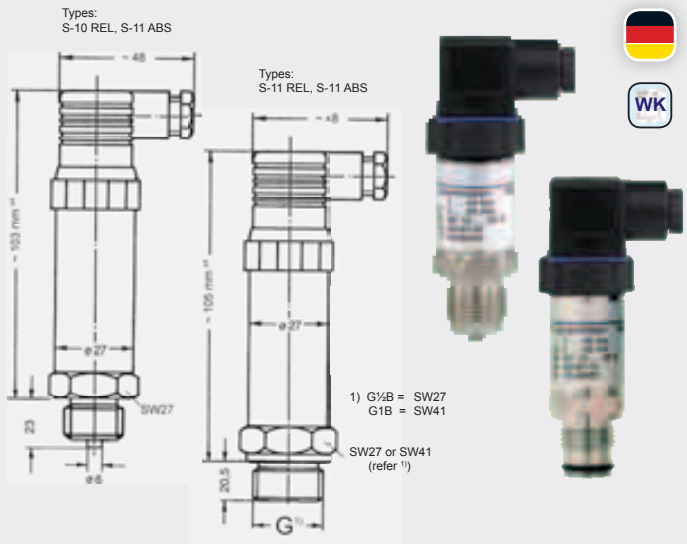

### S-10 REL

(Standard, zero output at ambient pressure)

### S-11 REL

(Flush, zero output at ambient pressure)

### S-10 ABS

(Standard, absolute, zero output at vacuum)

### S-11 ABS

(Flush, absolute, zero output at vacuum)

**Description:** piezoresistive pressure sensor with temperature compensation. Completely welded and stainless steel design, filled food safe (up to 16 bar), thin film strain (above 25 bar).

#### Specification:

**Meas. ranges:** in bar (other values upon request)

S-10 REL and S-11REL: 0.1, 0.16, 0.25, 0.4, 0.6, 1, 1.6, 2.5, 4, 6, 10, 16, 25, 40, 60, 100, 160, 250, 400, 600, 1000

S-10 ABS and S-11ABS: 0.25, 0.4, 0.6, 1, 1.6, 2.5, 4, 6, 10, 16

**Measuring range (MB), Overload limit (ÜL):**

MB (bar): 0.1, 0.16, 0.25, 0.4, 0.6, 1, 1.6, 2.5, 4, 6, 10, 16, 25 ... 600, 1000

ÜL (bar): 1 1.5 2 2 4 5 10 10 17 35 35 80 2x MB 1500

**Output signal:** 4-20 mA (0-10 V - refer to options; others upon request)

**Permissible impedance:** RA [Ω] = (Uv [V] - 10 V) / 0.02 A (for output 4-20 mA)  
RA [Ω] > 10 kΩhm (for output 0-10V)

**Auxiliary energy:** 10...30 V DC (14...30 V DC for output 0-10V)

**Accuracy:**

deviation from parameter (% of span): ≤ 0,5 (setting of cut-off point)

≤ 0,25 (setting of tolerance band, BFSL)

Repeatability (% of span): ≤ 0,05

Stability / year (% of span): ≤ 0,2 (at reference conditions)

Hysteresis (% of span): ≤ 0,1

**Permissible temperature of media:** -30 ... +100 °C (refer to options)

**Operating temperature ambient:** -20...+80 °C

**Compensated temperature range:** 0...+80 °C

**Temperature coefficient:** ≤ 0.02% FS / K (or < 0.04 % FS for MB < 0.25 bar)

**Filling:** KN77, food safe

**Housing:** stainless steel 1.4435 (IP65)

**Pressure connection:** (other upon request)

Type S-10... : G 1/2 B

Type S-11... : G 1 B (up to 1.6 bar), G 1/2 B (from 2.5 to 600 bar)

**Mounting position:** any

**Electric connection:** standard via elbow-type plug EN 175301-803/A

**Electric protections:** reverse voltage protection, over voltage and short-circuit protection.

#### Options:

Special measuring range

-40...+125 °C (media temperature)

-20...+150 °C (media temperature, S-11 only)

Output signal 0-10V (other upon request)

Ex-protection



## CO-Transducer



with TÜV certificate acc. to VDI 2053 for CO surveillance systems in underground garages etc.

### GT1 - CO

#### Properties

High quality, TÜV certified CO transmitter for detection of carbon monoxide in underground garages, parking garages, boiler plants, heating systems, garages as well as in the ambient air.

The CO transducer has a very long-lasting electrochemical measuring cell and could be easily integrated in existing CO surveillance systems (without loss of validity of existing TÜV certificates).

Via two-wire system, displays, controller and alarm devices with 4-20 mA input could be connected without any problem.

#### Range of Application:

- underground garages, parking garages
- boiler plant and heating systems
- motorcar garage

#### Highlights:

- TÜV certification according to VDI 2053
- also suitable as replacement sensor for existing CO surveillance systems
- long-lasting electrochemical measuring cell
- automatic zero calibration
- 3 years warranty for the CO sensor element

#### Specification

<b>Measuring range:</b>	0 ... 300 ppm CO (carbon monoxide)
<b>Measuring principle:</b>	electrochemical, permanent measuring
<b>Reproducibility:</b>	< 3 ppm according to VDI 2053
<b>Response Time T<sub>90</sub>:</b>	< 60 s
<b>Cross sensitivity:</b>	≤ 2% of 300 ppm CO (acc. to VDI 2053)
<b>Linearity error:</b>	≤ 2% of 300 ppm CO (acc. to VDI 2053)
<b>Offset adjustment:</b>	automatically
<b>Output signal:</b>	4 - 20 mA, 2-wire, max. burden = 500 Ohm
<b>Power supply:</b>	12 - 28 V DC (at option VO: 16 - 28 V DC)
<b>Permissible burden:</b>	RA [Ω] = (U <sub>v</sub> [V] - 12 V or 16 V) / 0.02 A
<b>Working condition:</b>	-10 ... +40 °C, 15 ... 95 %RH (non-condensing)
<b>Option: on site display</b>	approx. 13 mm high, 3½-digit LC-display
<b>EMC:</b>	according to EN 50 081-1, EN 50 082-2 B
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1,5 mm <sup>2</sup> , wire diameter from 4,5 to 7 mm
<b>Housing:</b>	ABS, 82 x 80 x 55 mm (without elbow-type plug)
<b>Mounting:</b>	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø
<b>Weight:</b>	approx. 190 g

#### Options / upcharge

**VO:** on site display

#### Accessories

<b>GZ-01</b>	test gas cap GT (for controlled flow with test gas)
<b>GZ-02</b>	gas bottle with 12l test gas: 30 ppm CO
<b>GZ-03</b>	gas bottle with 12l test gas: 300 ppm CO
<b>GZ-04</b>	gas valve unit MiniFlo for gas bottles with 12l
<b>GSN 24</b>	plug-in power supply (230 V <sub>AC</sub> => 24 V <sub>DC</sub> /300 mA)

*additional accessories upon request*

## CO<sub>2</sub>-Transducer



### GT10 - CO<sub>2</sub> - 1R

#### Properties

Due to the fact, that CO<sub>2</sub> is an important indicator for the quality of air in rooms, it's super important to measure the CO<sub>2</sub> content.

The recommended CO<sub>2</sub> limit value for ambient air is 1000ppm. An exceeding of this limit causes tiredness and a loss of concentration.

The high quality and precise CO<sub>2</sub>-transducer works according to the infrared principle (NDIR). An auto-calibration procedure compensates aging effects and is responsible for an excellent long term stability of this CO<sub>2</sub> transducer.

Due to the freely adjustable output signal the transmitter could be used for nearly each existing controller input etc..

Additionally, there is a local display which shows beside the actual CO<sub>2</sub> concentration, the minimum and maximum values as well as an optical alarm.

#### Highlights:

- excellent long term stability
- auto-calibration procedure
- for surveillance of the recommended CO<sub>2</sub> concentration in ambient air
- output signal free scaleable

#### Specification

<b>Meas. range:</b> standard:	0 ... 2000 ppm CO <sub>2</sub> (carbon dioxide)
opt. /5000:	0 ... 5000 ppm CO <sub>2</sub> (carbon dioxide)
<b>Measuring principle:</b>	infrared principle (NDIR)
<b>Accuracy:</b> standard:	±50 ppm ±2 % of meas. value (at 20°C, 1023 mbar)
opt. /5000:	±50 ppm ±3 % of meas. value (at 20°C, 1023 mbar)
<b>Output signal:</b>	4 - 20 mA (3-wire), standard 0 - 1 V or 0 - 10 V (3-wire), optional
<b>Output scaling:</b>	free scaleable, by entering display range
<b>Auxiliary energy:</b>	12 ... 30 V DC, max. 600 mA (at option 0-10V: 18 ... 30 V DC, max. 600 mA)
<b>Perm. burden (at 4-20mA):</b>	RA < 200 Ω
<b>Perm. load (at 0-...Volt):</b>	RL > 3000 Ω
<b>Display:</b>	approx. 10 mm high, 4-digit LC-display
<b>Working condition:</b>	-10 ... +50 °C, 5 ... 95 % r.F., 850 ... 1100 hPa
<b>Storage condition:</b>	-25 ... +60 °C, 5 ... 95 % r.F., 700 ... 1100 hPa
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65), max. wire cross section: 1,5 mm <sup>2</sup> , wire diameter from 4,5 to 7 mm
<b>Housing:</b>	ABS, 82 x 80 x 55 mm (without elbow-type plug)
<b>Mounting:</b>	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft-Ø
<b>Weight:</b>	approx. 225 g
<b>Features:</b>	- min-/max-value memory, - optical alarm, - input of offset and scale for adjusting

#### Options / upcharge

**5000:** measuring range: 0 ... 5000 ppm CO<sub>2</sub>

**AV01:** output signal 0-1V

**AV010:** output signal 0-10V

#### Accessories

**GSN 24-750** plug-in power supply (230 V<sub>AC</sub> => 24 V<sub>DC</sub>/750 mA)

## air oxygen measuring transducer



### OXY 3690 MP incl. oxygen sensor GGO370/MU

#### Specification

##### Measuring ranges:

**oxygen concentration:** 0,0 to 100,0 % O<sub>2</sub> (gaseous)  
**temperature:** -20,0 ... 50,0 °C

##### Accuracy device (at nominal temperature 25 °C):

**oxygen:** ±0,1 % ± 1 digit  
**temperature:** ±0,1 °C ± 1 digit

##### Output signal (only O<sub>2</sub>):

4 - 20 mA (2-wire - standard)  
0 - 10 V (3-wire - option)

##### Electric isolation:

input electrically isolated

##### Auxiliary energy:

12 ... 30 V DC (at output 4-20 mA)  
18 ... 30 V DC (at output 0-10 V - option)

##### Perm. impedance (at 4-20mA):

RA [Ω] = (U<sub>v</sub> [V] - 12 V) / 0,02 A

##### Permissible load (at 0-10V):

RL > 3000 Ω

##### Working condition:

0 to +50 °C, 0 to +95 %RH (non-condensing)

##### Storage temperature:

-20 to +70 °C

##### Reverse voltage protection:

50 V permanently

##### Display:

approx. 10 mm high, 4-digit LCD-display

##### Housing:

ABS (IP65 - with the exception of sensor plug)

##### Dimensions:

82 x 80 x 55 mm (without elbow-type plug and sensor plug)

##### Electric connection:

elbow-type plug acc. to EN 175301-803/A (IP65),  
max. wire cross section: 1,5 mm<sup>2</sup>,  
wire diameter from 4,5 to 7 mm

##### Sensor connection:

5-pin jack connector, screwable

##### Calibration:

1-point calibration in atmospheric air.

##### Air pressure compensation:

500...2000 hPa abs., manually input

##### Oxygen sensor:

##### Sensor type:

GGO 370 / MU

##### Measuring range:

0,0 to 100,0 % O<sub>2</sub>

##### Response time T<sub>90</sub>:

<10 sec., depending on temperature

##### Warranty:

12 months (assuming appropriate usage according to the manual)

##### Application area:

suitable for air and pure oxygen, suitable for high CO<sub>2</sub>-concentrations

##### Temperature compensation:

integrated in oxygen sensor

##### Connection cable:

approx. 1,3 m, with 5-pin plug, screwable

##### Operating pressure:

500 ... 2000 hPa (static).

*For air and gas-stream use the oxygen sensor GOO.../MU.*

##### Working condition:

-5 to +50 °C, 0 to +95 %RH (non-condensing)

##### Storage temperature:

-15 to +60 °C

##### Dimensions of housing:

approx. Ø 40 x 103 mm (153 mm incl. anti-buckling glanding)  
housing with M16x1-screw thread (sensor can be connected to line tubes by means of an included adapter piece)

##### Weight:

approx. 135 g

#### Options / upcharge

**-AV010:** output signal 0-10 V

**-GOO:** oxygen sensor GOO 370 / MU, open sensor type, suitable for air and gas-stream. (further information p.r.t. p. 43)

**-KL10:** sensor connection cable 10 m

**-LO:** design type for fast measurements of low oxygen contents (0-25%) with sensor element GOEL 380

#### Accessories / spare parts

**GOEL 370** spare sensor element for GGO 370 / MU

## oxygen measuring transducer for dissolved oxygen in liquids



### OXY 3610 MP incl. oxygen sensor

#### Specification

##### Measuring ranges:

**oxygen concentration:** 0,00 to 25,00 mg/l (dissolved)  
**temperature:** 0,0 ... 50,0 °C

##### Accuracy device (at nominal temperature 25 °C):

**oxygen:** ±1,5 % of m.v. ± 0,2 mg/l  
**temperature:** ±0,1 °C ± 1 digit

##### Output signal (only O<sub>2</sub>):

4 - 20 mA (2-wire - standard)  
0 - 10 V (3-wire - option)

##### Electric isolation:

input electrically isolated

##### Auxiliary energy:

12 ... 30 V DC (at output 4-20mA)  
18 ... 30 V DC (at output 0-10V - option)

##### Perm. impedance (at 4-20mA):

RA [Ω] = (U<sub>v</sub> [V] - 12 V) / 0,02 A

##### Permissible load (at 0-10V):

RL > 3000 Ω

##### Working condition:

0 to +50 °C, 0 to +95 %RH (non-condensing)

##### Storage temperature:

-20 to +70 °C

##### Reverse voltage protection:

50 V permanently

##### Display:

approx. 10 mm high, 4-digit LCD-display

##### Housing:

ABS (IP65 - with the exception of sensor plug)

##### Dimensions:

82 x 80 x 55 mm (without elbow-type plug and sensor plug)

##### Electric connection:

elbow-type plug acc. to EN 175301-803/A (IP65),  
max. wire cross section: 1,5 mm<sup>2</sup>,  
wire diameter from 4,5 to 7 mm

##### Sensor connection:

5-pin jack connector, screwable

##### Calibration:

1-point calibration: simple quick calibration in atmospheric air.

##### oxygen sensor (GWO3600MU):

##### Electrode:

active membrane type, with integrated NTC-resistor

##### Response time:

95% in 10 sec., depending on temperature

##### Operation life:

3 years or more, depending on maintenance

##### Operating pressure:

max. 3 bar.

##### Flow rate:

min. 30 cm/sec.

##### Build in diameter:

Ø 12,0 ±0,2 mm (suitable for ½" screw connection)

##### Overall length:

approx. 220 mm (with anti-buckling glanding)

##### Build in length:

approx. 110 mm

##### Connection cable:

approx. 4 m, with 5-pin plug, screwable

##### Warranty:

12 months

##### Working temperature:

0 to +40 °C

**Scope of supply:** device incl. electrode, GWOK01 and KOH100

#### Options / upcharge

**AV010:** output signal 0-10V

#### Accessories / spare parts

**GWO 3600 MU** Spare electrode with 4 m cable

**Upcharge for electrode with 10m cable length**

**Upcharge for electrode with 30m cable length**

**GSKA 3600** protection cap for depth measuring

**GAS 3600** working set

(consisting of 3 spare diaphragm heads and 100ml KOH-electrolyte)

**GWOK 01** spare diaphragm head

**KOH 100** spare electrolyte KOH

100 ml-bottle

## pH-measuring transducer with on site display and electrical isolation



### GPHU 014 MP / BNC without electrode

### GPHU 014 MP / Cinch without electr.

#### Properties

- automatically and manually temperature compensation
- external Pt1000-temperature probe connectable
- sensor input electrically isolated
- 2-point calibration

#### Specification

<b>Measuring range:</b>	0,00 to 14,00 pH
<b>Accuracy:</b>	0,02 pH $\pm 1$ digit (at nominal temperature = 25°C)
<b>Output signal:</b>	4 - 20 mA (2-wire), standard 0 - 10 V (3-wire), optional
<b>Electric isolation:</b>	input electrically isolated
<b>Auxiliary energy:</b>	12 ... 30 V DC (for option 0-10V: 18 ... 30 V DC)
<b>Perm. impedance (at 4-20mA):</b>	$R_A [\Omega] = (U_v [V] - 12V) / 0,02 A$
<b>Permissible load (at 0-10V):</b>	$R_L > 3000 \Omega$
<b>Electrode:</b>	any standard pH electrode is suitable. (pH electrode not included in scope of supply)
<b>Input resistance:</b>	$10^{12} \Omega$
<b>Electrode socket:</b>	BNC-socket or Cinch-socket
<b>Temperature compensation:</b>	-30 ... 150°C, manually via 3 keys or automatically via external Pt1000 sensor.
<b>Adjustment:</b>	via 3 keys and integrated LCD
<b>Temp. sensor socket:</b>	2x banana socket $\varnothing 4$ mm, for Pt1000 probe.
<b>Display:</b>	approx. 10 mm high, 4-digit LCD-display
<b>Working temperature:</b>	0 ... +50 °C (electronic)
<b>Storage temperature:</b>	-20 ... +70 °C
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65)
<b>Housing:</b>	ABS
<b>IP rating:</b>	IP65, with the exception of electrode and temp. connection sockets. (cpl. IP65 upon request)
<b>Dimensions:</b>	82 x 80 x 55 mm (H x W x D)
<b>Mounting:</b>	with fixing holes for wall mounting
Mounting distance:	70 x 50 mm (W x H)
Fixing screws:	max. shaft- $\varnothing$

#### Options / upcharge

<b>AV010:</b>	output signal 0-10 V
<b>MB...:</b>	limited measuring range (please state the desired range) (i.e.: 2,00 ... 10,00 pH)

#### Ordering example


**GPHU 014 MP / BNC, AV010:**  
pH-transmitter with BNC electrode socket and 0-10V output signal

#### Accessories / spare parts

<b>GTF 2000 WD - B</b>	water proof Pt1000-temperature probe, with 2 banana plugs $\varnothing 4$ mm
<b>for additional Pt1000-temperature probes</b>	p.r.t. page 124, 132-133
<b>GE 100</b>	standard electrode, cinch-plug
<b>GE 117</b>	pH electrode with integrated Pt1000-sensor 1 x BNC-plug and 1 x banana plug $\varnothing 4$ mm, thread PG13,5, pressure resistant up to 6bar
<b>PG 13,5</b>	plug on thread adapter for pressureless use
<b>GAK 1400</b>	working and calibration set (p.r.t. page 37)

for additional electrodes and accessories p.r.t. page 37, 124, 132-133

## Redox-measuring transducer with electrical isolation



### GRMU 2000 MP without electrode

#### Specification

<b>Measuring range:</b>	$\pm 2000$ mV or special limited measuring ranges acc. to customer specification!
<b>Accuracy:</b>	0,2 % FS (at nominal temperature = 25°C)
<b>Output signal:</b>	4 - 20 mA (2-wire), standard 0 - 10 V (3-wire), optional
<b>Electric isolation:</b>	input electrically isolated
<b>Auxiliary energy:</b>	12 ... 30 V DC (for option 0-10V: 18 ... 30 V DC)
<b>Perm. impedance (at 4-20mA):</b>	$R_A [\Omega] = (U_v [V] - 12V) / 0,02 A$
<b>Permissible load (at 0-10V):</b>	$R_L > 3000 \Omega$
<b>Electrode:</b>	redox electrode GE105 (electrode not included in scope of supply!)
<b>Input resistance:</b>	$10^{12} \Omega$
<b>Electrode socket:</b>	Cinch-socket (standard) BNC-socket with upcharge
<b>Option: on site display</b>	approx. 10 mm high, 4-digit LCD-display
<b>Working temperature:</b>	0 ... +50 °C (electronic)
<b>Storage temperature:</b>	-20 ... +70 °C
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65)
<b>Housing:</b>	ABS (IP65) with the exception of electrode connection sockets. (cpl. IP65 upon request)
<b>Dimensions:</b>	82 x 80 x 55 mm (H x W x D)
<b>Mounting:</b>	with fixing holes for wall mounting (accessible after removal of cover) Mounting distance: 70 x 50 mm (W x H) Fixing screws: max. shaft- $\varnothing$ 4 mm

#### Options / upcharge

<b>VO:</b>	on site display
<b>AV010:</b>	output signal 0-10V
<b>BNC:</b>	electrode socket: BNC
<b>MB...:</b>	limited measuring range (please state the desired range)

#### Ordering example


**GRMU 2000 MP / BNC, VO:**  
GRMU2000MP with BNC electrode socket and on site display

#### Accessories / spare parts

<b>GE 105</b>	redox electrode with cinch-plug and testing solution
<b>PG 13,5</b>	plug on thread adapter for pressureless use, with external thread PG 13.5 (suitable for any electrode)

For additional electrodes and accessories p.r.t. page 37

#### Dimensioned sketch GPHU / GRMU

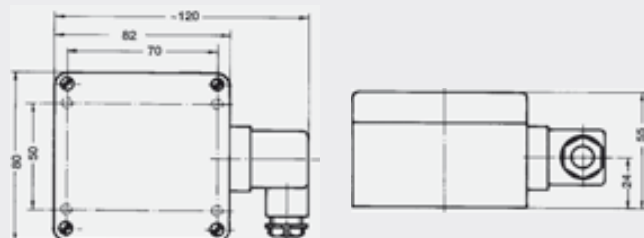

# Conductivity measuring transducer



## GLMU 200 MP incl. 2-pol meas.cell

### Application area

- Easy, low-cost conductivity measurement
- Drink water monitoring
- Fish farming / water monitoring
- Fresh and sea water aquaristics

### Properties

- compact conductivity measuring cell
- Output signal freely scaleable
- Adjustable cell constant
- Selectable temperature compensation mode
- On site display for the conductivity or temperature
- Exchangeable unit stickers

Specification	GLMU 200 MP	GLMU 400 MP
<b>Measuring range:</b> ( free selectable by user )		
Conductivity:	0.0 ... 200.0 µS/cm 0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 200.0 mS/cm --	0.0 ... 200.0 µS/cm 0 ... 2000 µS/cm 0.00 ... 20.00 mS/cm 0.0 ... 200.0 mS/cm 0 ... 500 mS/cm
specific resistance:	5.0 ... 100.0 kOhm*cm 0.50 ... 10.00 kOhm*cm 50 ... 1000 Ohm*cm 5.0 ... 100.0 Ohm*cm --	0.0 ... 200.0 kOhm*cm 0.00 ... 20.00 kOhm*cm 1 ... 5000 Ohm*cm 1.0 ... 500.0 Ohm*cm 1.00 ... 50.00 Ohm*cm
TDS:	0.0 ... 200.0 mg/l 0 ... 2000 mg/l -- -- --	0.0 ... 200.0 mg/l 0 ... 500.0 mg/l 0 ... 2000 mg/l 0.0 ... 20.0 g/l 0 ... 200 g/l
Salinity:	0.0 ... 70.0	0.0 ... 70.0
Temperature meas.:	-5.0 ... +140.0 °C (transducer) 0.0 ... +80.0 °C (meas. cell)	-5.0 ... +140.0 °C (transducer) 0.0 ... +80.0 °C (meas. cell)
<b>Measuring cell:</b>	2-pole measuring cell	4-pole measuring cell
Standard meas. cell:	conductivity measuring cell with graphite electrodes and integrated temperature sensor. The cell constant is measured and preset ex works. Measuring cell in breakage-protected plastic pole, heat resistant up to 80 °C, Ø12 mm, length of shaft 120 mm, approx. 1 m connection cable. <i>For pressureless applications use the slip-on thread adapter PG13.5. For pressures up to 6 bar order cell with fixed PG13.5 thread (optionally).</i>	

### Option / upcharge

- **LTG**  
for organic matter (alcohol, petrol, diesel)  
up to max. 1000 µS/cm  
with glass shaft, unplatinized,  
1,35 m PUR-cable



- **PG** electrode with thread PG13.5 (for use up to 6 bar)



## GLMU 400 MP incl. 4-pol meas.cell

### Application area

- Higher saline concentrations (e.g. brine measuring)
- Measurements in polluted solutions / waste water
- Control of neutralization
- Heavily polluted liquids

### Properties

- high-quality conductivity measuring cell, insensitive to dirt
- Output signal freely scaleable
- Adjustable cell constant
- Selectable temperature compensation mode
- On site display for the conductivity or temperature
- Exchangeable unit stickers

<b>Accuracy:</b> ( at nominal temperature = 25°C )	Conductivity: ±0.5% of meas. value ±0.3% FS Temperature meas.: ±0.2°C ±1 digit
<b>Meas. cell connection:</b>	7-pole diode connector
<b>Cell constant:</b>	K = 0,30 ... 1,20, freely adjustable
<b>Temperature compensation:</b> ( selectable by user )	off: no compensation Lin: linear compensation (from 0.3 ... 3.0 %/K) nLF: non-linear function of natural water according to EN27888 (DIN 38404)
<b>Display:</b>	approx. 10 mm high, 4-digit LC-display
<b>Output signal:</b>	4 - 20 mA (2-wire), standard 0 - 1 V or 0 - 10 V (3-wire), with upcharge
<b>Electric isolation:</b>	input electrically isolated
<b>Auxiliary energy:</b>	12 ... 30 V DC (for option 0-10 Volt: 18 ... 30 V DC)
<b>Reverse voltage protection:</b>	50 V permanent
<b>Perm. impedance</b> (at 4-20 mA):	RA [Ω] = (Uv [V] - 12V) / 0.02 A
<b>Permissible load</b> (at 0-10 Volt):	RL > 3000 Ω
<b>Working temperature:</b>	-25 ... +50 °C (transducer) 0 ... +80 °C (standard meas. cell)
<b>Storage temperature:</b>	-25 ... +70 °C
<b>Electric connection:</b>	elbow-type plug acc. to EN 175301-803/A (IP65)
<b>Housing:</b>	ABS (IP65) with the exception of electrode socket
<b>Dimensions:</b>	82 x 80 x 55 mm, without elbow-type plug and socket
<b>Warranty:</b>	12 months
<b>Mounting:</b>	with fixing holes for wall mounting, Mounting distance: 148 x 50 mm (W x H)

### Option / upcharge

- **AV010:** output signal 0-10V
- **AV01:** output signal 0-1V
- **KL=...:** longer meas. cell cable (recommended max. 5m)

### Accessories / spare parts

- LFE 202** spare 2-pol measuring cell (for GLMU 200 MP)
- LFE 200** spare 4-pol measuring cell (for GLMU 400 MP)
- PG 13,5** plug on thread adapter for pressureless use
- GKL 100** 100 ml control solution, 1413 µS/cm (pursuant DIN 27888)
- GEH 1** Swivel-arm electrode retainer

## Rotational speed sensor proximity switch with analog output



### EFFI EFFU

#### Properties

The EFFI and EFFU combine a proximity switch with the signal processing to standard signals in one device.


The scaling of the standard signal output can be done at face.

Programming:

- The value for 0 Hz is fixed: 4 mA or 0 V
- For programming the upper output limit (20 mA or 10 V) you have to adjust the max. frequency in the system. By connecting two contacts the device is programmed to this value.

#### Specification

<b>Measuring principle:</b>	hall-sensor
<b>Sensing distance:</b>	4 mm
<b>Measuring range:</b>	1 ... 4095 Hz
<b>Output signal:</b>	EFFI: 4 - 20 mA (3-wire) EFFU: 0 - 10 V (3-wire)
<b>Sampling interval:</b>	periods measurement, output update 50 ms
<b>Output accuracy:</b>	±0,25 % of full scale
<b>Auxiliary energy:</b>	10 ... 30 V DC (at EFFU: 15 ... 30 V DC)
<b>Idle current:</b>	max. 20 mA (without load)
<b>Electrical connection:</b>	4-pole locking plug M12 x 1 (connection cable see below)
<b>Working temperature:</b>	0 ... 70 °C
<b>Protection class:</b>	IP 67
<b>Housing materials:</b>	nickel plated brass, PA66
<b>Dimensions:</b>	~ Ø 10 x 66,5 mm
<b>Weight:</b>	approx. 25 g



## M12 - connection cable



Screened PUR-connection cable with moulded M12x1-connector (and loose ends). Available in straight and angular design.

#### Versions

<b>KM4P-G02:</b>	straight connector, 4-pole, 2 m cable
<b>KM4P-G10:</b>	straight connector, 4-pole, 10 m cable
<b>KM4P-W02:</b>	90° connector, 4-pole, 2 m cable
<b>KM4P-W10:</b>	90° connector, 4-pole, 10 m cable
<b>KM4P-GL:</b>	connector for self-tailoring, 4-pole

## Caloric flow controller



### EFK2 EFKP EFKM

#### Properties

The flow controllers EFK... monitor liquids and gaseous substances. The instrument combines compact dimensions with a integral probe, a LED trend display (for FLOW) with dual-colour status indicator and an output whose switch-point can be adjusted via a potentiometer.

- no moving parts in the monitored medium
- mounting largely independent of pipe diameter
- low pressure loss
- high working pressures (up to 100 bar)

#### Area of application

- Metalworking industry: cooling liquid and lubricant monitoring
  - Steel industry: coolant circuits
  - Chemical industry: protection against dry running (for pumps), detection of leaks and fill level monitoring
  - Beverage industry: monitoring of cleaning processes
- Sensors suitable for: Water, oil, aggressive substances

#### Specification

<b>Measuring principle:</b>	calorimetric
<b>Operating range:</b>	2 ... 150 cm/s (for water)
<b>Display:</b>	EFK2 2-colour LED (red < threshold, green > threshold) EFKP, EFKM 9 LEDs (red - threshold, green 1-8 - flow)
<b>Switch-point adjustment:</b>	via potentiometer
<b>Output:</b>	EFK2 relay contact (max. 30 V / 2 A) NO (open = no flow) Optional: NPN-transistor output (max. 24 V / 100 mA) PNP-transistor output (max. 24 V / 100 mA)
<b>Output:</b>	EFKP, EFKM NPN-transistor output (max. 24 V / 200 mA) Optional: PNP-transistor output (max. 24 V / 200 mA)
<b>Auxiliary energy:</b>	24 V DC ±10 %
<b>Power consumption:</b>	max. 70 mA
<b>Electrical connection:</b>	4-pole locking plug M12 x 1 (connection cable see left)
<b>Working pressure:</b>	max. 100 bar
<b>Working temperature:</b>	15 .. 70 °C
<b>Mounting position:</b>	arbitrary
<b>Protection class:</b>	IP 65 (EFK2), IP 60 (EFKP), IP 67 (EFKM)
<b>Mech. connections:</b>	screw-in thread G1/2A Option: screw-in thread G1/4A
<b>Probe length:</b>	approx. 29 mm (incl. thread)
<b>Materials:</b>	
<b>Probe:</b>	stainless steel 1.4571
<b>Housing:</b>	EFK2: stainless steel 1.4305 EFKP: PA6.6 EFKM: brass, nickel plated
<b>Dimensions:</b>	(without M12-plug) EFK2: Ø 35 x 97 mm (W x H x D) EFKP: 50 x 50 x 95 mm (W x H x D) EFKM: Ø 73 x 81 mm (W x H x D)

#### Options / upcharges

<b>G1/4A:</b>	device connection G1/4A
<b>PNP:</b>	output: PNP
<b>NPN:</b>	output: NPN

## Flow meter (rotor)



**RRI - 010 / ...** (DN10, G3/8)

**RRI - 025 / ...** (DN25, G1)

### Properties

The flow meter measures the flow rate with an impeller rotating due to the flow. The flow rate is proportional to the rotational frequency. The rotational speed is measured by an inductive proximity switch.

- no magnets, but with inductive sensor
- largely wear-free due to high-quality ceramic axis and bearing
- output signal NPN (optional PNP)
- no inlet and outflow zone needed
- uncomplicated flow measurement
- intrinsically safe behaviour
- modular design with several connecting systems
- connections plug- and pivotable

### Area of application

Sensors suitable for: Water, oil (viscosity up to 10 mm<sup>2</sup>/s (10 cSt.))

### Specification

<b>Measuring principle:</b>	rotor (inductive sensor)		
<b>Designs:</b>	<b>bore</b>	<b>measuring range</b>	<b>pulse rate*1</b>
RRI-010 / 020:	2 mm	(0,1) 0,5 ... 1.5 l/min.	ca. 10200 Imp. / l
RRI-010 / 050:	5 mm	(0,2) 2,0 ... 10 l/min.	ca. 3345 Imp. / l
RRI-010 / 070:	7 mm	(0,4) 2,0 ... 12 l/min.	ca. 1755 Imp. / l
RRI-025 / 080:	8 mm	(2) 3 ... 30 l/min.	ca. 1216 Imp. / l
RRI-025 / 120:	12 mm	(3) 5 ... 60 l/min.	ca. 607 Imp. / l
RRI-025 / 160:	16 mm	(4) 6 ... 100 l/min.	ca. 252 Imp. / l
<b>Accuracy:</b>	±3 % of meas. value (in spec. meas. range)		
<b>Repeatability:</b>	±1 % of full scale		
<b>Pressure decrease:</b>	max. 0.5 bar (at max. flow)		
<b>Working pressure:</b>	max. 16 bar		
<b>Output signal:</b>	NPN (optional: PNP)		
<b>Auxiliary energy:</b>	5 ... 30V DC, max. 10mA (closed current, without load)		
<b>Electrical connection:</b>	2 m cable (optional: 4-pole locking plug M12 x 1)		
<b>Working temperature:</b>	0 ... 60 °C		
<b>Protection class:</b>	IP 67		
<b>Mech. connection:</b>	nominal bore	thread	
RRI-010...:	DN 10	G 3/8, female thread *2	
RRI-025...:	DN 25	G 1, female thread *2	
<b>Mounting position:</b>	horizontal or ascending direction of flow		
<b>Materials:</b>			
<b>Housing:</b>	Questra (DN25) / PPS (DN10)		
<b>Connection *2, rotor:</b>	PVDF		
<b>Bearing:</b>	Iglidur X		
<b>Axis:</b>	ceramics ZrO <sub>2</sub> -TZP		
<b>Seal:</b>	viton		
<b>Dimensions:</b>	84 x 29 x 88 mm (RRI-010...), 110 x 73 x 103 mm (RRI-025...)		

\*1 precise value on type plate, max. variability within a batch: ±10 %

\*2 other thread types (male thread, ...) or materials for connectors upon request

### Options / upcharges

**PNP:** output signal PNP

**M12:** Electr. connection = plug M12 x 1

## Flow switch incl. DIN plug



**FCM - 6** (2,5 l/min)

Flow switch incl. DIN plug

**FCM - 3** (6 l/min)

Flow switch incl. DIN plug

### Properties


FCM flow switch has been designed to offer a very simple and safety control against the missing flow passage. The electrical components are separated from the mechanical parts and the reed contact is magnetically actuated. The switch head is fixed to the body by a fast self locking system and can be replaced without removing the flow switch from the pipe. No adjustment or setting is required after the switch head replacement.

- No setting required
- Easy and fast replacement of the switch head
- Low pressure loss
- Horizontal and vertical mounting
- Liquid and gas applications

### Specification

<b>Body</b>	Brass
<b>Process connection</b>	G 1/2"
<b>Sensing element (Piston)</b>	Polypropylen
<b>Accuracy</b>	± 15%
<b>Temperature max.</b>	90 °C
<b>Pressure loss</b>	0,5 bar at max. flow rate
<b>Flow rate max.</b>	25 l/min, for all settings
<b>Weight</b>	170 g
<b>Reed contact</b>	N.O. / No flow condition
<b>Contact rating</b>	300 V, 70 VA, 0,5 A
<b>Wiring</b>	Angle plug
<b>Protection class</b>	IP65
<b>Mounting</b>	Horizontal and Vertical
<b>Set point l/min</b>	Nominal ON OFF
FCM - 6	2,5 2,8 1,7
FCM - 3	6 6,3 4,1

### Dimensions



# Flow meter for a wide range of applications

(Suitable evaluation devices: GIA20EB, GIR230FR, GIA2000, GIR2002)



## FHK

### Advantages

- exact measurings of fluid volumes
- long life

### Application

alcoholic and non alcoholic drinks, chemicals, water, wine etc.

### Specification

**Meas. range:** approx. 0,03 - 0,58 l/min (other ranges upon request)  
**Nozzle:** D=1 mm.  
**Pulse rate:** approx. 2223 imp./l  
**Pressure range:** max. 20 bar (at 20°C)  
**Viscosity of media:** < 50 cSt.  
**Meas. accuracy:** ±2%  
**Repetitive accuracy:** <0,25%  
**Power supply:** 5-24 V DC; max. 13 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x G¼" IG parallel  
**Operating temperature:** -10 to 100 °C  
**Dimensions:** approx. 55 x 40 x 66 mm incl. plug  
**Material of housing:** ARNITE, turbine: PVDF, sealings: Viton

## FH-Messing

### Advantages

- sturdy metal housing
- high temperature range
- high operating pressure

### Application

Measuring of low-viscous media in beverage and chemical industry etc., such as petrol, fuel etc.

### Specification

**Meas. range:** approx. 0,09 - 1,26 l/min (other ranges upon request)  
**Nozzle:** D=1.5 mm.  
**Pulse rate:** approx. 1450 imp./l  
**Pressure range:** max. 20 bar (at 20°C)  
**Viscosity of media:** < 50 cSt.  
**Meas. accuracy:** ±2%  
**Repetitive accuracy:** <0,25%  
**Power supply:** 5-24 V DC; max. 13 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x G¼" IG parallel  
**Operating temperature:** -10 to 100 °C  
**Dimensions:** approx. 55 x 40 x 66 mm incl. plug.  
**Material of housing:** brass chemically nickel plated, sealings: Viton, nozzle: V2A  
**Scope of supply:** cpl. with 2 tube screw-type glandings for internal tube Ø 8mm.

## FHK-PVDF

### Advantages

- all parts coming into contact with media are plastic
- suitable for chemical and aggressive media

### Application

**Chemical industry:** products containing tensides, alkaline products, acids.

**Industry:** Monitoring of cooling media circuit at machines, dosing and consumption quantity measurements

### Specification

**Meas. range:** approx. 0,25 - 5 l/min (other ranges upon request)  
**Nozzle:** D=3,3 mm.  
**Pulse rate:** approx. 1033 imp./l  
**Pressure range:** max. 20 bar (at 20 °C)  
**Viscosity of media:** < 50 cSt.  
**Meas. accuracy:** ±2%  
**Repetitive accuracy:** <0,25%  
**Power supply:** 5-24 V DC; max. 13 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x G¼" IG parallel  
**Operating temperature:** -10 to 100 °C  
**Dimensions:** approx. 54 x 40 x 66 mm incl. plug.  
**Material of housing:** PVDF, sealings: Viton, nozzle: PTFE, axis: PCTFE



## EPI

### Advantages

- suitable for higher viscous media
- calibratable

### Application

chemicals, oil, sirup, liquid soap, catchup, mayonnaise, cleaning agent concentrate, for standardization use

### Specification

**Meas. range:** 0,06 - 5,35 l/min (depending on viscosity)  
**Nozzle:** D=7 mm  
**Pulse rate:** approx. 462 imp./l  
**Pressure range:** max. 10 bar (at 20°C)  
**Viscosity of media:** approx. 5 - 8000 cSt.  
**Meas. accuracy:** ±1 % (depending on viscosity)  
**Repetitive accuracy:** < 0,25 %  
**Power supply:** 5-24 V DC; max. 13 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x G¼" IG  
**Operating temperature:** -10 to 65 °C  
**Dimensions:** approx. 88 x 68 x 57 incl. plug.  
**Material of housing:** PEEK, sealing: viton

## FHKU

### Advantages

- suitable for large flow
- low pressure drop
- standard thread connection

### Application

Water, acetone, alcohol, ammonia, benzene, vinegar, dilution bases, wine, whiskey, Dosing, and other

### Specification

**Meas. range:** approx. 3 - 26,7 l/min  
**Nozzle:** D=10 mm  
**Pulse rate:** approx. 65 imp./l  
**Pressure range:** max. 20 bar (at 20°C)  
**Viscosity of media:** < 50 cSt.  
**Meas. accuracy:** ±2 %  
**Repetitive accuracy:** <0,25 %  
**Power supply:** 5-24 V DC; max. 13 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x G1/2" A  
**Operating temperature:** -10 to 100 °C  
**Dimensions:** approx. 75 x 43 x 67 incl. plug.  
**Material of housing:** Ryton, sealing: viton

## FHKSC

### Advantages

- compact device
- measuring of very small quantities
- highly suitable for sucking operations

### Application

**Beverage industry:** wine, spirits, mineral water etc. and chemically slightly aggressive media

### Specification

**Meas. range:** approx. 0,08 - 0,57 l/min.  
**Nozzle:** D=1.2 mm  
**Pulse rate:** approx. 1925 imp./l  
**Pressure range:** -1...+0,3 bar (at 20°C)  
**Viscosity of media:** < 50 cSt.  
**Meas. accuracy:** ±2 %  
**Repetitive accuracy:** <0,25 %  
**Power supply:** 3.8-20 V DC; <8 mA  
**Output signal:** open collector, NPN  
**Flow connections:** 2 x 6 mm tube connection  
**Operating temperature:** -10 to 65 °C  
**Dimensions:** approx. 55 x 40 x 55 mm.  
**Material of housing:** ARNITE, sealing: silicone.

## Flow measuring transducer with Hall-effect sensor

for low viscose, non aggressive liquids



### VISION 2008

incl. elbow-type plug

#### Specification

- minimum size, maximum accuracy
- easy installation,
- installation in any position possible
- optimum-quality due to high-quality materials used
- no maintenance

#### Area of application

- manufacturing of oil and gas burners, flow heaters or cooling systems
- for dish washers and washing machines
- automotive technology (measuring of petro consumption, etc.)
- laboratories, chemical works, pharmaceutical industry
- agriculture and horticulture

#### Specification

**Rotor-position scanning:** Hall-Sensor  
**Measuring range:** 1.5 - 25 l/min  
**Resolution:** approx. 1000 pulses/l  
**Measuring agent:** clean liquids, we recommend filtering with approx. 20 to 40 micron  
**Viscosity:** up to approx. 15 cSt.  
**Accuracy:** ±3% ranging from 10 - 100%  
**Repeatability:** ≤ 0.5%  
**Working temperature:** -20 to +100°C  
**Operating pressure:** 25 bar  
**Electric connection:** elbow-type plug acc. EN 175301-803/A, type C industrial  
**Auxiliary energy:** 5 - 24 V DC, approx. 8 mA  
**Multiplier (R):** 1 - 2.2 kOhm  
**Output signal:** frequency 5 - 416 Hz, open collector NPN  
**Output current:** max. 20 mA  
**Dimensions:** approx. 55 x 17 x 30 mm  
**Material:**  
**Housing:** Grilamid TR55 (PA12)  
**Rotor:** Grilamid (PA12 Ferrit)  
**Bearings:** PTFE 15% graphite  
**Delivery connection:** G 3/8" thread  
**DN:** 8 mm  
**Weight:** approx. 15 g



## Axial turbine flow sensor for liquids



### VTH 25 MS - 180

cpl. with 2 m of cable, ready for plug-in.

#### General


The flow sensor VTH25MS-180 is a measuring transducer used for measuring the volume flow or for dosing. It is suitable for a wide range of applications due to its compact design, large measuring range and high measuring accuracy.

#### Area of application

- cooling water measurements, tapping installations, dosing units
- medical technology, plastics industry, laboratory
- solar systems, heating application, heat quantity measurement
- bakery machines, kitchen machines
- machine tools

#### Specification

**Sensor:** Hall-effect-sensor  
**Measuring range:** 4 - 160 l/min, max. 80 l/min with continuous operation (signal emission as of 1 l/min)  
**Resolution:** approx. 65 pulses / litre  
**Measuring agent:** liquids  
**Max. particle size:** 0.5 mm  
**Measuring accuracy:** ±3% of measured value  
**Repeatability:** ±0.5%  
**Working temperature:** T<sub>max</sub> = 85°C  
**Max. operating pressure:** 10 bar  
**Auxiliary energy:** 10 - 30 V DC  
**Output signal:** frequency, open collector NPN  
**Output current:** max. 20 mA  
**Material:**  
**Duct:** brass  
**Turbine cage:** PPO Noryl GFN 3V 960  
**Rotor:** PPO Noryl GFN 2V 73701, with solenoids  
**Bearings:** sapphire / PA  
**Shaft:** CrNi-steel (1.4436)  
**Delivery connection:** R 1 1/4" - outer thread  
**Nominal width:** DN 25

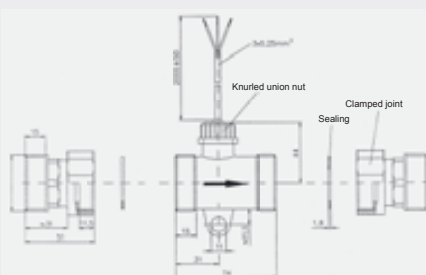

## Device for monitoring the level (capacitive)



### GNS-SCV-W

Probe for application in water and all conductive liquids

### GNS-SCV-Z

Probe for application in oil and all no-conductive liquids

#### General

The GNS-SCV capacitive probes are the best way to monitor the level condition of liquids as water, oil gasoline and solid products as powder and granular.

- Sealed
- No moving parts

#### Area of application


- Application for
  - Water
  - Oil
  - Gasoline
  - Solid products as powder or granular

#### Specification

**Power supply:** 12 ... 35 V DC / 5 mA  
**Electrical output:** NPN no-active / max. 3 W  
**Electrical connection:** Plug EN 175301-803/A  
**Process connection:** 1/4" NPT, Brass  
**Switch delay:** 4 sec.  
**Electrode:** Cu-Zn  
**Electrode coating:** PTFE  
**Electrode length:** 50 mm  
**Switch point:** 40 mm ± 2 mm vertical mounting  
 on the axis of SCV horizontal mounting  
**Pressure max.:** 25 bar  
**Temperature max.:** -30 ... +125 °C

#### Dimensions [mm]:

SW	A	B	L0	L1
24	74	10	50	40 ± 2

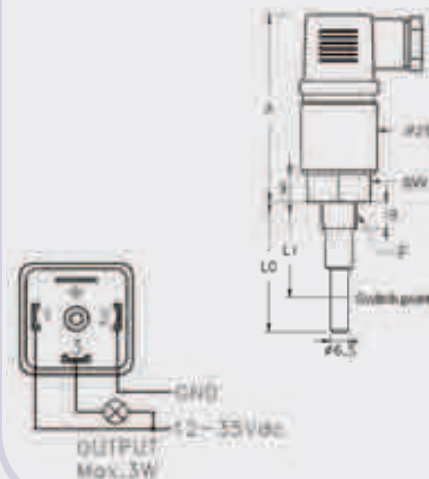



## Level Switch



**GNS-C1** (with 1 microswitch)  
**GNS-C2** (with 2 microswitches)

### Properties

These level switches offer the most reliable solution for liquid level control where side mounting system is required. The small outlines, the materials and the mounting versatility make this unit one of the level switches more required by the market. The GNS are also suitable for use with process temperature up to 180 °C.

- Switch head magnetically actuated
- 1 or 2 microswitches
- Adjustable stem length
- Brass or AISI-316 construction

### Specification


<b>Processconnection:</b>	G1"
<b>Float - S50 (S.G.):</b>	> 0,7 g/cm <sup>3</sup>
<b>Pressure max.:</b>	25 bar
<b>Temperature max.:</b>	180°C
<b>Working ambient temperature:</b>	-30/+55°C / RH 90%
<b>Hysteresis max.:</b>	20 mm
<b>Weight:</b>	440 g
<b>Male threads:</b>	Gas parallel UNI 228/1
<b>Body materials:</b>	Natural Brass or Stainless steel (AISI-316)
<b>Float material:</b>	Stainless steel (AISI-316)
<b>Microswitch:</b>	1x or 2x SPDT
<b>Voltage:</b>	250 V AC / 48 V DC
<b>Current:</b>	3A AC / 3A DC
<b>Electr. Connection:</b>	via screw terminals
<b>Wiring:</b>	Independent micro switches separately wired SPDT
<b>Protection Class:</b>	IP65 Housing

### Order Example

**GNS-C2-O:** Level switch with 1 microswitch, Body material Brass


#### Body Materials

- O Natural Brass
- S AISI - 316

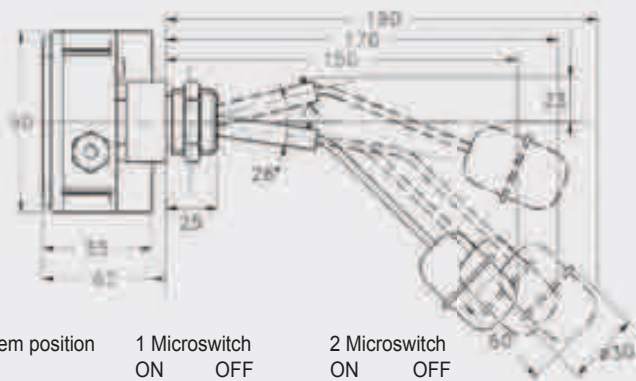

Stem position	1 Microswitch		2 Microswitch	
	ON	OFF	ON	OFF
Long	-46 mm	-63 mm	-32 mm	-49 mm
Medium	-48 mm	-61 mm	-34 mm	-47 mm
Short	-50 mm	-60 mm	-36 mm	-46 mm
Switch point tolerance:	±5 mm			

## Float switch

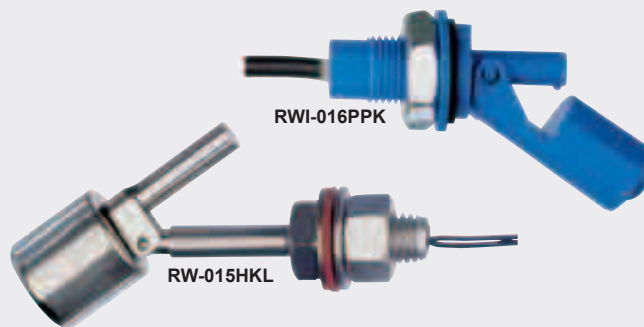

**RWI-016PPK** (polypropylene)  
**RWI-016PVK** (PVDF)  
**RW-015HKL** (stainless steel)

### Properties

Mechanical level controller for liquids. A magnet-equipped float triggers a pre-fixed reed switch.

- wall mounting
- reliable
- good repeatability
- stainless steel design for high temperatures


### Area of application

Sensor suitable for: Water, oil,


Specification	RWI-016PPK	RWI-016PVK	RW-015HKL
<b>Measuring principle:</b>	reed switch	reed switch	reed switch
<b>Switch type:</b>	<i>n.c. or n.o depending on installation position</i>		
<b>Switching power:</b>	250 V AC, 0,5 A, 50 VA	250 V AC, 0,5 A, 50 VA	220 V AC, 0,28 A, 30 VA
<b>Density medium:</b>	>0,6 g/cm <sup>3</sup>	>0,75 g/cm <sup>3</sup>	>0,70 g/cm <sup>3</sup>
<b>Working temperature:</b>	max. 90 °C	max. 130 °C	max. 200 °C
<b>Working pressure:</b>	PN = 3 bar	PN = 6 bar	PN = 5 bar
<b>Mounting position:</b>	horizontal	horizontal	horizontal
<b>Protection class:</b>	IP 65	IP 65	IP 65
<b>Electrical connection:</b>	~ 50 cm cable	~ 50 cm cable	~ 60 cm strand
<b>Materials:</b>			
<b>Body:</b>	PP	PVDF	stainl. steel 1.4571
<b>Float:</b>	PP	PVDF	stainl. steel 1.4571
<b>Seal:</b>	viton	viton	
<b>Weight:</b>	approx. 75 g	approx. 75 g	approx. 120 g

### Dimensions: RWI-016...


Assembly internally:  
Hole diameter Ø 16,5 mm



Assembly externally:  
Hole diameter Ø 23 mm



### Dimensions: RW-015HKL



## Level transmitter



**LC-S45M...** (brass)

**LC-S44M...** (brass)

**LC-K52K...** (stainless steel)

Final prices depend on type, see price table below

### Properties

A magnet equipped float activates a reed chain inside a tube which is connected to resistors comparable to a potentiometer. The gapless positioning of the sensors provides a continuous signal with good resolution (up to 10-20 mm) and repeatability.

- top assembly
- selectable material combinations
- optional: with user-specific characteristic (for adjustment to tank design)

### Area of application

Sensor suitable for: Water, oil, aggressive substances (only LC-K52K...)

### Specification

<b>Tube length:</b>	250 mm, 500 mm, 750 mm, 1000 mm, 1500 mm and 2000 mm		
<b>Float travel:</b>	..0250	..0500	..0750 ..1000 ..1500 ..2000
LC-S45M... :	190 mm	440 mm	690 mm 940 mm
LC-S44M... :			930 mm 1430 mm 1930 mm
LC-K52K... :	160 mm	410 mm	660 mm 910 mm 1410 mm 1910 mm
<b>Division (resolution):</b>	10 mm (LC-S45..., LC-K52K0250) or 20 mm		
<b>Output signal:</b>	4 - 20 mA (2-wire)		
Optional:	0 - 10 V (3-wire)		
<b>Auxiliary energy</b>	10 ... 30 V DC (at option Flex: 18 ... 30 V DC)		
<b>Electrical connection:</b>	angular connector acc. to EN 175301-803/A (at option Flex: 4-pole locked plug M12 x 1)		
<b>Working temperature:</b>	0 .. 85 °C		
<b>Working pressure:</b>	max. 20 bar (LC-S..), max. 40 bar (LC-K..)		
<b>Density medium:</b>	>0,34 g/cm <sup>3</sup> (LC-S45..), >0,44 g/cm <sup>3</sup> (LC-S44..), >0,66 g/cm <sup>3</sup> (LC-K52..)		
<b>Mounting position:</b>	vertical, float pointing downwards		
<b>Protection class:</b>	IP 65		
<b>Dimensions:</b>	<b>LC-S45..</b>	<b>LC-S44..</b>	<b>LC-K52..</b>
<b>Sensor head:</b>	~50 x 50 x 78 mm	~60 x 58 x 78 mm	Ø 69 x 78 mm
<b>Tube length:</b>	according to design type		
<b>Mounting SW:</b>	SW 40	SW 46	SW 46
<b>Screw-in thread:</b>	G1 A	G1 1/2 A	G2 A
<b>Float:</b>	Ø 30 x 45 mm	Ø 44 x 50 mm	Ø 52 x 70 mm
<b>Materials:</b>			
<b>Housing:</b>	Ms58	Ms58	stainl. steel 1.4571
<b>Tube:</b>	Ms58	Ms58	stainl. steel 1.4571
<b>Float:</b>	Spansil	Spansil	stainl. steel 1.4571

### Prices of design types

tube length: ..0250 ..0500 ..0750 ..1000 ..1500 ..2000

LC-S45M...

LC-S44M...

LC-K52K...

### Options / upcharges

**AV010:** output signal 0-10 V

**Flex:** Transmitter with Flex-head (M12-connection) user-specific characteristic possible

## Single contact level switch



**GNS-KIT ...**

(without rod tube - state when ordering)

### Properties

The user can add by himself the level switch in the desired length the rod tube between the process connection and the float contact unit. The float contact unit is under water protected.

- Sealed under water protected contact
- Rod tube in 500 mm / 1000 mm / 1500 mm available state when ordering
- IP65 protection class

### Specification

<b>Float-contact unit:</b>	Nickel plated brass
<b>Density:</b>	> 0.35 g/cm <sup>3</sup>
<b>Pressure max.:</b>	20 bar
<b>Temperature max.:</b>	105°C
<b>Connection:</b>	1/8"
<b>Reed-contact:</b>	SPDT: 230 V, 60 VA, 1.0 A
<b>Process connection:</b>	Thread G1", Brass
<b>Electrical connector:</b>	Plug EN 175301-803/A
<b>Protection Class:</b>	IP65
<b>Seal:</b>	NBR, oil resistant
<b>Rod-tube:</b>	Ø 8 mm, Brass

### Rod-tube (state when ordering)

<b>Rod-tube length:</b>	FL = 500 mm
	FL = 1000 mm
	FL = 1500 mm

Order example: GNS-KIT 1000



# Temperature probes

Handheld instrument


Display / Controller

Logger / EASYBus

Transmitter

Temperature probe

Alarm / Protection

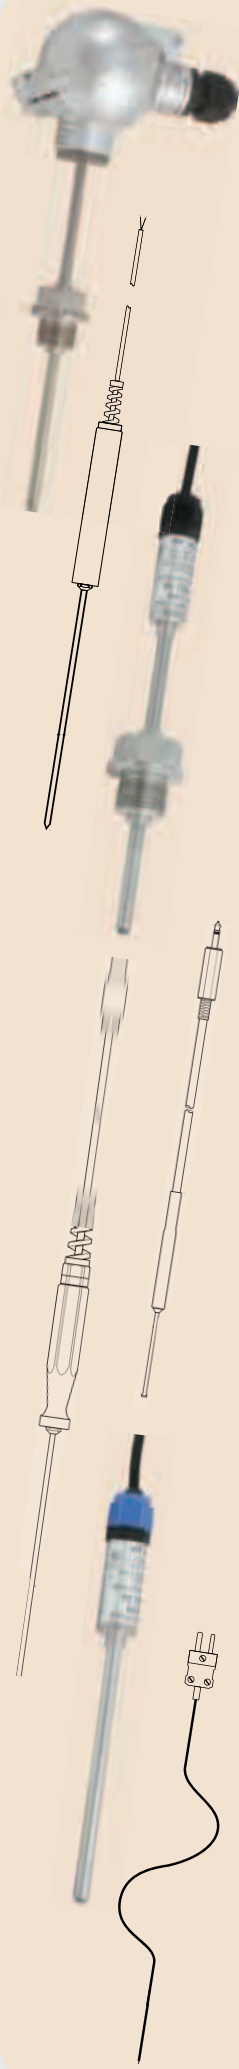

	Connection					Sensor head	Description	Page
	4-pole Mini-DIN-plug	3,5 mm Ø jack connection	Miniature flat-pin plug	Loose ends	Protection			
<b>Pt100</b>								
GTF ..	✓			✓			Immersion probe for liquids / gases	123
GES ..	✓			✓			Insertion probe for soft media	123
GLF 401 Mini	✓			✓			Probe for measurement of ambient air	123
GOF 401 Mini	✓			✓			Surface probe for solid surfaces	123
<b>Pt1000</b>								
GTF ..		✓		✓			Immersion probe for liquids / gases	124
GES ..		✓		✓			Insertion probe for soft media	124
GOF ..		✓		✓			Surface probe for solid surfaces	124
GLF ..		✓		✓			Probe for measurement of ambient air	124
GGF ..		✓		✓			Probe for deep-frozen products	124
<b>NiCr-Ni (type K)</b>								
GOF ..			✓	✓			Surface probe for solid surfaces	125
GTZ ..			✓	✓			Clip-on probe	125
GTF ..			✓	✓			Immersion probe for liquids / gases	126
GES ..			✓	✓			Insertion probe for soft media	126
GKF ..			✓	✓			Probe for compost grain	126
GAF ..			✓	✓			Asphalt probe	126
GTF 300 ..			✓	✓			Wire probe	127
GMF ..			✓	✓			Magnetic surface probe	127
GGF ..			✓	✓			Probe for deep-frozen products	127
GRF ..			✓	✓			Tire probe	127
GKF			✓	✓			Cable lug probe	127
GLS ..			✓	✓			Soldering tip probe	127
GTT ..			✓	✓			Thermo elements	128
GTF 101 ..			✓	✓			Thermo elements	129
<b>Rt10Rh-Pt (type S)</b>								
GTF ..			✓	✓	✓		Probe for burning kilns	130
<b>NiCrSi-NiSi (type N)</b>								
GTF ..			✓	✓	✓		Probe for permanent high temperatures	130
<b>Silicium (KTY ..)</b>								
GTF ..		✓		✓			Immersion probe	130
GMF ..				✓			Immersion, touching, air probe	130
<b>Freely customized probes (Pt100 / Pt1000 / NiCr-Ni)</b>								
GTF 101 ..			✓	✓		✓	Industrial probes, process connection without thread	131/132
GTF 102 ..			✓	✓		✓	Industrial probes, process connection with thread	131/132
GTF 103 ..					✓	✓	Industrial probes, process connection with / without thread	131/132
GTF 104 ..					✓		Probe with angle plug	133
TF 101 ..			✓	✓			Hermetically sealed probe	134
GOF 1xx ..			✓	✓			Self-adhesive probes	135

# Temperature probes

## Accuracy:

**Pt100 / Pt1000:** sensor accuracy acc. to DIN EN 60751

**DIN cl. B:** (area of validity: -50 ... +500 °C) ±0,3°C at 0°C

**DIN cl. A:** (area of validity: -30 ... +300 °C) ±0,15°C at 0°C

**DIN cl. AA = 1/3 DIN cl. B:** (0 ... +150 °C) ±0,1°C at 0°C

**1/10 DIN Kl. B:** ±0,03°C at 0°C

**Thermocouples:** sensor accuracy acc. to DIN EN 60584-2

**class 1 für Typ K:** ±1,5°C at range -40...+375°C

**class 1 für Typ N:** ±1,5°C at range -40...+375°C

**class 1 für Typ S:** ±1°C at range 0...1100°C

## Special designs (Upcharges):

basic fee for custom made probe

**longer probe tube**

**longer cable** (silicone)

**other cable material**

**teflon covered probe tube** (for probes up to 200 mm)

(for probes used in acids and salt water, upper temperature range 250 °C)

**waterproof probe handle** (casted, only possible with PVC cable -20 ... +105 °C)

**higher sensor accuracy: 1/3 DIN Kl. B,**

for Pt100 and Pt1000,

tolerances: 0,1°C at 0°C

**higher sensor accuracy: 1/10 DIN Kl. B,**

for Pt100-probes,

tolerances: 0,03°C at 0°C

upcharge per further starting 100 mm

upcharge per further starting meter






upcharge per meter

**please refer to cable pricing p. 137**

## Please note:

**customized probes have to be ordered in writing!  
return or exchange are not possible!**






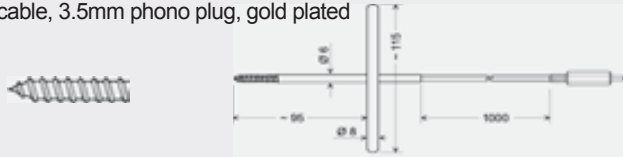

## Pt100 Measuring probe

Ordering type Range / DIN Class	Application / Dimensions (mm) techn. specification	Response time T <sub>90</sub>	suitable for
<b>GTF 401</b> -50 ... +400°C DIN cl. B	<b>Immersion probe for liquids / gases</b> non-corrosive stainless steel tube (V4A), plastic handle, approx. 1 m 4-wire PVC cable, anti-buckling glanding, 4-pin miniature DIN-type plug 	approx. 10 sec.  air approx. 40 sec.	GMH2000(SA) GMH35xx GMH3710 GMH3750
<b>GTF 401 1/3 DIN *</b> -50 ... +400°C	as GTF401 however 1/3 DIN class B (±0,1°C at 0°C)		
<b>GTF 401 1/10 DIN *</b> -50 ... +400°C	as GTF401 however 1/10 DIN class B (±0,03°C at 0°C) and flexible jacket tube, Ø 3mm		
<b>GES 401</b> -50 ... +400°C DIN cl. B	<b>Insertion probe for soft media</b> Specification as for GTF401 but with needle type prod 	approx. 10 sec.	GMH2000(SA) GMH35xx GMH3710 GMH3750
<b>GES 401 1/3 DIN *</b> -50 ... +600°C	as GES401 however 1/3 DIN class B (±0,1°C at 0°C)		
<b>GTF 601</b> -200 ... +600°C DIN cl. B	<b>Immersion probe for liquids / gases, 4-wire</b> handle as per GTF150, approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug, flexible jacket tube, 3mm Ø. (smaller tube diameter upon request)	approx. 10 sec.	GMH2000(SA) GMH35xx GMH3710 GMH3750
<b>GTF 601 1/3 DIN *</b> -200 ... +600°C	as GTF601 however 1/3 DIN class B (±0,1°C at 0°C)		
<b>GTF 35</b> -50 ... +400°C DIN cl. B	<b>Immersion probe for liquids / gases, 4-wire</b> non-corrosive stainless steel tube (V4A), approx. 1 m 4-wire PVC cable, 4-pin miniature DIN-type plug 	approx. 10 sec.	GMH35xx GMH3710 GMH3750
<b>GLF 401 Mini</b> -25 ... +70°C DIN cl. A	<b>Fast and accurate Measurement of ambient air</b> Ø 1,6 mm, FL = ca. 40 mm, 4-pin mini. DIN-type plug 	approx. 15 sec.	GMH35xx GMH3710 GMH3750
<b>GOF 401 Mini</b> -50 ... +200°C DIN cl. B	<b>Surface probe for solid surfaces, fast</b> 2 x 2.3 mm ceramic Pt1000 sensor mounted at the tip, V4A tube, 4-wire PVC cable with 4-pin miniature DIN-type plug 	approx. 15 sec.	GMH35xx GMH3710 GMH3750

\* Please note the area of validity for the class of accuracy given above.

# Pt1000 - Measuring probes, 2-wire










All types of probes also available for Pt100 2- / 3- or 4-wire connection

Ordering type Range	Application / Dimensions (mm) techn. specification	Response time $T_{90}$	suitable for	
<b>GTF 175</b> -70 ... +200°C Pt1000 class B	<b>Immersion probe for liquids / gases</b> non-corrosive stainless steel tube (V4A), plastic handle, anti-buckling glanding, 1m highly flexible silicone cable, 3.5 mm gold plated jack connector 	fluid approx. 10 sec.  air approx. 40 sec.	GMH175 GFTH200	
<b>GTF 175 LE</b>	like before but with loose cable ends		GIA20EB	
<b>GTF 175 / 1.6</b> -70 ... +200°C Pt1000 class B	<b>Immersion probe for liquids / gases</b> probe tube: jacket element Ø1.6mm, flexible, other data p.r.t. GTF175	fluid approx. 4 sec.  air approx. 25 sec.	GMH175 GFTH200 ST60, ST80	
<b>GTF 175 / 1.6 - LE</b>	like before but with loose cable ends		GIA20EB	
<b>GES 175</b> -70 ... +200°C Pt1000 class B	<b>Insertion probe for soft media</b> stainless steel tube (V4A) with slim insertion tip, other data p.r.t. GTF175 	approx. 10 sec.	GMH175 GFTH200	
<b>GES 175 LE</b>	like before but with loose cable ends		GIA20EB	
<b>GOF 175</b> -70 ... +200°C Pt1000 class B	<b>Surface probe for solid surfaces</b> S2 x 2.3mm ceramic Pt1000 sensor mounted at the tip. V4A tube, quadratic 3 x 3 mm at the tip, other data p.r.t. GTF175 	approx. 60 sec.	GMH175	
<b>GOF 175 LE</b>	like before but with loose cable ends		GIA20EB	
<b>GOF 175 Mini</b> -70 ... +200°C Pt1000 class B	<b>Surface probe for solid surfaces, fast</b> S2 x 2.3mm ceramic Pt1000 sensor mounted at the tip, V4A tube, 1m silicone cable, 3.5 mm gold plated jack connector 	approx. 15 sec.	GMH175 GFTH200	
<b>GLF 175</b> -70 ... +200°C Pt1000 class B	<b>Air/gas probe for clean media</b> (for dirty measurands use GTF175), punched V4A protection tube, fast miniaturized Pt1000 mounted freely in tube, resulting in fast response, other data p.r.t. GTF175 	approx. 15 sec.	GMH175 GFTH200	
<b>GLF 175 LE</b>	like before but with loose cable ends		GIA20EB	
<b>GGF 175</b> -70 ... +200°C Pt1000 class B	<b>Probe for deep-frozen products</b> to screw into deep-frozen products, etc. no predrilling required. Stainless steel (V4A) tube, 6 mm Ø with screw prod, flexible silicone cable, 3.5mm phono plug, gold plated 	approx. 15 sec.	GMH175 GFTH200	
<b>GTF 2000</b> -50 ... +200°C Pt1000 class B	<b>Air- / tube mounting probe</b> Probe for diving tube. Tube of stainless steel, highly flexible silicone cable 2 x 0.25 <sup>2</sup> , 3.5mm gold plated phono plug 		GMH175 GFTH200	
<b>GTF 2000 LE</b>	Customized cable lengths (1m standard), each beginning meter like before but with loose cable ends		GIA20EB	
<b>GTF 2000 WD</b> -20 ... +105°C Pt1000 class B	<b>Air- / tube mounting probe - water proof type</b> Construction like described before, but cable of PVC and tube enclosed water proof, max. 105°C!		GMH175 GFTH200	
<b>GTF 2000 WD - LE</b>	like before but with loose cable ends		GIA20EB	

We manufacture all types of probes according to Your special desires - low priced and fast. Please contact us.

# NiCr-Ni (Type K) - Measuring Probe

class 1 = highest precision-class according to DIN












Ordering type	Range °C	Application / Dimensions (mm)	Response time $T_{90}$	further technical details
<b>GOF 130CU</b>	-65 ... +500°C	<b>Surface probe</b> for straight and solid metal surfaces 	approx. 3 sec.	Spring-loaded copper plate, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GOF 500</b>	-65 ... +500°C	<b>Surface, immersion, air, gas probe</b> for any solid surface 	approx. 5 sec.	Solid copper plate, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GOF 130</b>	-65 ... +900°C	<b>Surface probe</b> for any solid surface 	approx. 2 sec.	2 laser welded NiCr-Ni resilient springs, V4A-tube, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GOF 200HO</b>	-65 ... +400°C	<b>Surface probe</b> for fastest measurements in small gaps 	approx. 2 sec.	Small elbow-type, flexible thermocouple tapes, plastic handle, silicone cable, DIN-type plug
<b>GOF 400HO</b>	-65 ... +400°C	<b>Surface probe</b> for fastest measurements 	approx. 2 sec.	Flexible thermocouple tapes, plastic handle, silicone cable, DIN-type plug
<b>GOF 400VE</b>	-65 ... +400°C	<b>Surface probe</b> for fastest measurements 	approx. 2 sec.	Flexible thermocouple tapes, plastic handle, silicone cable, DIN-type plug <b>Accessories MH 400VE:</b> magnet holder, heat resistant up to 100 °C
<b>GOF 500 HO</b>	-200 ... +500°C	<b>Surface probe</b> for fastest measurements Ø 1,5 MTE (K) Inconel 600 	approx. 5 sec.	Solid copper plate, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GOF 900 HO</b>	-65 ... +900°C	<b>Surface probe</b> for any solid surface 	approx. 2 sec.	2 laser welded NiCr-Ni resilient springs, V4A-tube, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GTZ 300</b>	-65 ... +150°C	<b>Clip-on probe</b> for temperature measurements at tube surfaces 	approx. 3 sec.	for tubes up to approx. 1" Ø, silicone cable, DIN-type flat-pin plug

## NiCr-Ni Standard Measuring Probe "Type K" (ctd.)

Probes as Pt100 or Pt1000 upon request

Ordering type	Range °C	Application / Dimensions (mm)	Response time $T_{90}$	further technical details
<b>GTF 400</b>	-65 ... +550°C	<b>Immersion probe</b> inexpensive, fast, elastic (rigid)	approx. 3 sec.	Stainless steel tube, 1.5Ø, L=130mm, silicone cable
<b>GTF 900</b>	-65 ... +1000°C	<b>Immersion probe</b> inexpensive, elastic (rigid)	approx. 5 sec.	Stainless steel tube, 3Ø, L=130mm, silicone cable  (any length against upcharge) each additional 100mm
<b>GTF 1200</b>	-200 ... +1150°C	<b>Immersion probe for High-temperature</b> flexible thermowell	approx. 3 sec.	Inconel 1.5Ø, L=150mm, silicone cable, DIN-type flat-pin plug, <b>electrically insulated</b>
<b>GTF 1200/300</b>	-200 ... +1150°C	<b>Immersion probe</b> flexible thermowell	approx. 5 sec.	Inconel 3Ø, L=300mm, <b>electrically insulated</b>
<b>GTF 1000 AL</b>	-200 ... +1000°C	<b>Immersion probe</b> for aluminium melt, non-ferrous metal, etc.	approx. 30 sec.	V4A tube Ø6x1,4 mm, L=1000mm rigid, plastic handle, 1m silicone cable, DIN-type flat-pin plug, add. internal jacket TC, high lifetime
<b>GES 21K</b>	-50 ... +250°C	<b>Core temperature- / food probe</b> big white teflon handle water- and steam-tight, stainless steel anti-buckling		1 m teflon cable, DIN-type flat-pin plug, teflon handle Use for canteen kitchen, bakeries, butcher's shops, etc.
<b>GES 130</b>	-65 ... +550°C	<b>Insertion probe</b> for soft media	approx. 3 sec.	Flexible stainless steel (V4A) needle, 1.5 mm Ø, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GES 500</b>	-65 ... +550°C	<b>Insertion probe</b> for soft media	approx. 5 sec.	Flexible stainless steel (V4A) needle, 3 mm Ø, ...
<b>GES 900</b>	-65 ... +1000°C	<b>Insertion probe</b> inexpensive, elastic (rigid)	approx. 5 sec.	Stainless steel (V4A) tube, 3Ø, L=130mm, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GKF 125</b>	-65 ... +200°C	<b>Probe for compost, grain etc.</b> quick response within seconds but also rigid design	approx. 6 sec.	V4A tube 8mm dia. reduced to 3 mm, plastic handle, silicone cable, DIN-type flat-pin plug
<b>GAF 200</b>	-65 ... +550°C	<b>Injection or asphalt probe</b> for liquid or soft media etc.	approx. 6 sec.	V4A tube 8mm dia. reduced to 3 mm, plastic handle, spiral cable stretchable to 1.2m, DIN-type flat-pin plug Upcharge for other probe length
<b>GTL 130</b>	-65 ... +600°C	<b>Air/gas probe</b> (room temperature, smoke gases etc.)	approx. 1,5 sec.	Stainless steel (V4A) tube, plastic handle, silicone cable, DIN-type flat-pin plug

## NiCr-Ni Standard Measuring Probe "Type K" (ctd.)

Ordering type	Range °C	Application / Dimensions (mm)	Response time $T_{90}$	further technical details
<b>GTF 300</b>	-65 ... +300°C	Quick-response measurements in air, liquids, for very small surfaces 	approx. 0,3 sec.	Twisted pair of teflon insulated thermowell wires, 0,2 mm Ø each, welded measuring prod, very flexible, DIN-type flat-pin plug. Any length (up to 50m) against upcharge.
<b>GTF 300 GS</b>	-65 ... +400°C	For high temperatures in gases, air and for solid surfaces (not suitable for liquids) 	approx. 0,3 sec.	Pair of glass fibre insulated thermowell wires, 0,2 mm Ø each, DIN-type flat-pin plug. Upcharge for special length of probe
<b>GMF 250</b>	-65 ... +250°C	<b>Magnetic surface probe</b> sticks at magnetic materials, resilient measuring probe with small metal plate, approx 5mm dia. 	approx. 5 sec.	approx. 1m of twisted teflon insulated wire, DIN-type flat-pin plug
<b>GMF 200</b>	-65 ... +200°C	<b>Magnetic surface probe</b> sticks at magnetic materials, resilient measuring probe with small metal plate, approx 5mm dia. 	approx. 5 sec.	extended type (higher magnetic force), rigid 2m silicone cable, DIN-type flat-pin plug
<b>GGF 200</b>	-65 ... +200°C	<b>Probe for deep-frozen products</b> to screw into deep-frozen products, etc. no predrilling required 	approx. 10 sec.	Stainless steel (V4A) tube, 6 mm Ø with screw prod, spiral cable (approx. 1.2 m drawn out), DIN-type flat-pin plug
<b>GRF 200</b>	-50 ... +200°C	<b>Tire probe</b> fast response insertion probe with stop screw (needle adjustable 0 to 14 mm). Suitable for measuring temperature of tires and other soft media. 	approx. 5 sec.	plastic handle, spiral cable (approx. 1.2m drawn out), DIN-type flat-pin plug
<b>GKF 250</b>	-50 ... +250°C	<b>Cable lug probe</b> 		1 m teflon cable, loose ends
<b>GLS 500</b>	-50 ... +500°C	<b>Soldering tip probe</b> for direct connection to instrument 	approx. 2 sec.	thermo couple springs (~5mm) with laser welded meas. point (wires 0.3 Ø), ceramic tube approx. 6 Ø, DIN-type flat-pin plug
<b>GTO 130 OK</b>	-65 ... +400°C	<b>Air-/Gas probe</b> (changeable probe without cable) limited suitable also for surfaces 		NiCr-Ni-wire 0,5 Ø, welded and grinded flat, V4A-tube, DIN-type flat-pin plug, rigid connection
<b>GTE 130 OK</b>	-65 ... +400°C	<b>Insertion probe</b> (plug-in type without cable) for soft media 	approx. 3 sec.	Flexible stainless steel (V4A) needle, 1.5 mm Ø, DIN-type flat-pin plug, rigid connection
<b>GTT 1150 OK</b>	-200 ... +1150°C	<b>Immersion probe</b> (also suitable for gases/air - use as surface probe limited) 	approx. 3 sec.	Thermowell, Inconel 1.5 mm Ø, <b>electrically insulated</b> , flexible, DIN-type flat-pin plug, rigid connection (other length or Ø p.r.t. p. 126)



# Customized jacket thermo elements NiCr-Ni, low price standard lengths available from stock

(Delivery on short notice from stock or within 1 or 2 working days) - please do not hesitate to contact us !)

## 1. Jacket thermo elements NiCr-Ni (type K) complete with miniature flat-pin plug NST1200 (free from thermal e.m.f.)

### Specification:

**Jacket material:** Inconel 600, flexible - other materials upon request

**Insulation:** highly compressed pure MgO

**Thermo wires:** NiCr-Ni, DIN IEC 584, welding insulated (volt-free)

**Accuracy:** optimum accuracy (Cl. 1) =  $\pm 1.5^{\circ}\text{C}$  or  $\pm 0.4\%$  of measuring value

(Almost double accuracy as compared to class 2. As a comparison with class 2:  $\pm 2.5^{\circ}\text{C}$  or  $\pm 0.75\%$  of meas. value)

**Temperature application range:**  $-220 \dots +1150^{\circ}\text{C}$  (Probe tip and front part; wire outlet: max.  $200^{\circ}\text{C}$ )  
(Accuracy class 1 applicable from  $-40 \dots +1000^{\circ}\text{C}$ )


### Upon request:

Miniature flat-pin coupling free from thermal voltage. (Please order separately)

Type NKU 1200

Integral U-coupling (for installation in front panels)

Type NKU 1200 O

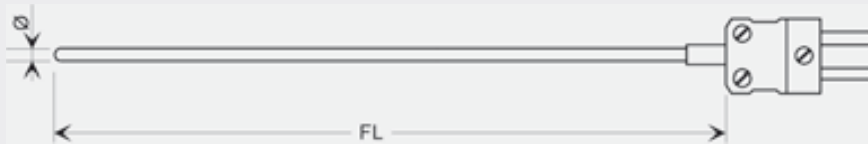

### Advantages of the flat-pin plug free from thermal e.m.f.:

- Same material for contacts and thermo elements
- No incorrect temperature values due to different materials
- Polarity cannot be mixed up
- One plug size for  $\varnothing$  from 0,5 to 6,0 mm
- Any extension possible (extension cable VKA-1m or length per customers' requests)
- Sensor elements can be exchanged easily



Type	$\varnothing$ mm	FL mm $\pm 10\text{mm}$		Type	$\varnothing$ mm	FL mm $\pm 10\text{mm}$	
GTT05150	0,5	160		GTT30150	3,0	145	
GTT05250		260		GTT30250		245	
GTT05500		510		GTT30500		495	
GTT051000		1010		GTT301000		995	
GTT051500		1510		GTT301500		1495	
GTT10150	1,0	145		GTT60150	6,0	145	
GTT10250		245		GTT60250		245	
GTT10500		495		GTT60500		495	
GTT101000		995		GTT601000		995	
GTT101500		1495		GTT601500		1495	
GTT15150	1,5	145		<b>Accessories:</b>			
GTT15250		245		<b>NKU1200</b> (coupling free from thermal e.m.f.)			
GTT15500		495		<b>NKU1200O</b> (U-coupling free from thermal e.m.f.)			
GTT151000		995		<b>NST1200</b> (plug free from thermal e.m.f.)			
GTT151500		1495		<b>AGL1</b> (silicone compensation line)			
				<b>VKA-1m</b> plug-in extension cable (each additional meter)			

All thermo elements accuracy class 1 (Almost double accuracy than class 2!)

## 2. Jacket thermo elements NiCr-Ni (type K) complete with cable sleeve and 1m silicone cable (compensation line), loose wire ends

### Specification:

**Jacket material:** Inconel 600, flexible - other materials upon request and against upcharge


**Insulation:** highly compressed pure MgO

**Thermo wires:** NiCr-Ni, DIN IEC 584, welding insulated (volt-free)

**Accuracy:** optimum accuracy (Cl. 1) =  $\pm 1.5^{\circ}\text{C}$  or  $\pm 0,4\%$  of measuring value  
(Almost double accuracy as compared to class 2. As a comparison with class 2:  $\pm 2,5^{\circ}\text{C}$  or  $\pm 0.75\%$  of meas. value)

**Connecting cable:** silicone compensation line, 1m long (max.  $200^{\circ}\text{C}$ ), loose ends. (Longer line or other material against upcharge)

**Temperature application range:**  $-220 \dots +1150^{\circ}\text{C}$  (Probe tip and front part; wire outlet: max.  $200^{\circ}\text{C}$ , for cable p.r.t. accessories)  
(Accuracy class 1 applicable from  $-40 \dots +1000^{\circ}\text{C}$ )

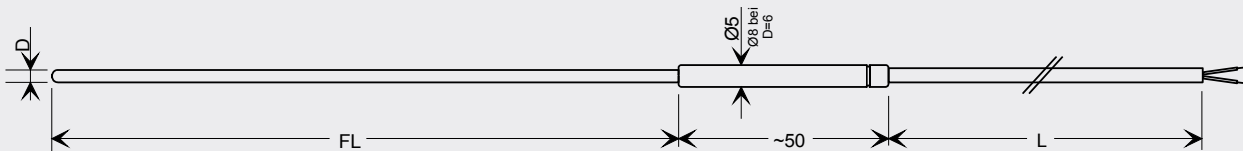

L = 1m, for other cable length or other accessories p.r.t. accessories

### Advantages:

- Mechanically sound
- Can be subjected to high temperatures and pressures
- Resistant to aggressive atmospheres
- Minimum dimensions, therefore short response times
- Flexible (the smaller the diameter the smaller the bending radii)
- Optimum accuracy acc. to DIN IEC584 class 1
- Potential-free (thermoelement wires have no connection to the outer jacket)




### Accessories: (against upcharge)

- Additional clamping screw-type connection for  $\varnothing 1.5, 3.0$  and  $6.0$  (stainless steel). Design with st. steel clamping piece (for high temperatures) or with teflon clamping piece (up to  $+250^{\circ}\text{C}$  - can be removed). Various thread diameters available (p.r.t. page 134-135)
- Extended or other cable (please specify upon order): silicone cable (up to  $200^{\circ}\text{C}$ ) or glass silk cable (up to  $400^{\circ}\text{C}$ ).
- Internal flat-pin plug (NST1200)


Type	$\varnothing$ mm	FL mm <sup>-20mm</sup>		Type	$\varnothing$ mm	FL mm <sup>-20mm</sup>	
GTF101-5/05150	0,5	150		GTF101-5/30150	3,0	130	
GTF101-5/05250		250		GTF101-5/30250		230	
GTF101-5/05500		500		GTF101-5/30500		480	
GTF101-5/051000		1000		GTF101-5/301000		980	
GTF101-5/051500		1500		GTF101-5/301500		1480	
GTF101-5/10150	1,0	130		GTF101-5/60150	6,0	130	
GTF101-5/10250		230		GTF101-5/60250		230	
GTF101-5/10500		480		GTF101-5/60500		480	
GTF101-5/101000		980		GTF101-5/601000		980	
GTF101-5/101500		1480		GTF101-5/601500		1480	
GTF101-5/15150	1,5	130		<b>Accessories:</b>			
GTF101-5/15250		230		Clamping screw conn. $\varnothing 1.5, 3.0$ or $6.0$			
GTF101-5/15500		480		Silicone cable (up to $200^{\circ}\text{C}$ )			
GTF101-5/151000		980		Glass silk cable (up to $400^{\circ}\text{C}$ )			
GTF101-5/151500		1480		Internal flat-pin plug (NST1200)			
							Other accessories see pages 128, 136 and 137.

Accuracy class 1 for all thermo elements (almost double accuracy than class 2!)







## Pt10Rh-Pt (Typ S) - measuring probes (class 1) for highest temperatures

Ordering type Measuring range	Application / Dimensions (mm)	Response time $T_{90}$	further technical details
<b>GBF 1550</b> +50 ... +1550°C	<b>Bunsen burner probe</b> Probe tip can be directly exposed to the flame. type S - wire 0.5 Ø 	approx. 2 sec.	stainless steel tube Ø8mm, with reduced ceramic tube Ø5.5mm, plastic handle, silicone cable, DIN-type flat-pin plug type "S"

## NiCrSi-NiSi (Typ N) - meas. probes (class 1) low cost measuring of high temperatures (permanent up to 1300°C)

<b>GTF101-N03250</b> -50 ... +1300°C (short-term peaks up to 1330°C)	<b>Probe for permanent high temperatures</b> Mantle material: special steel with extraordinary resistivity against oxidation at high temperatures and excellent corrosion resistance in chlorine and ammoniacal environments (Protective layer emerges at temperatures above 980°C)	approx. 5 sec.	stainless steel tube (FL=250mm), 1m silicone cable, loose cable ends upcharge for any cable length
<b>GTF101-N03500</b>			as above, however FL = 500mm
<b>GTF101-N031000</b>			as above, however FL = 1000mm
<b>other probes (Typ N) please refer to pages 126 / 127</b>			

## Silizium - Messfühler (Sensor: KTY ... )
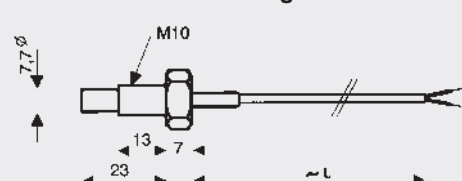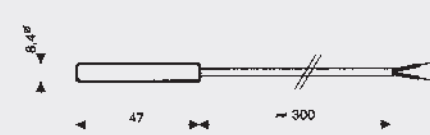
<b>GTF 1400 B</b> Sensor: KTY 81-210 -20 ... +110°C  Replacement for KTY 11-6	<b>Temperature probe for GPRT1400AN</b>  <b>OPTION: teflon covered probe tube</b> (for use in salt water)	<b>Sensor tube:</b> made of V4A, with shrinkable sleeve at cable outlet <b>Cable:</b> approx. 1 m of highly flexible silicone cable with Ø 3.5 mm plug
<b>GMF 11/180</b> Sensor: KTY 83-110 -50 ... +175°C	<b>Screw-type sensor M10</b> 	<b>Sensor tube:</b> V4A <b>Handle:</b> polyamide <b>Cable:</b> approx. 1m of highly flexible cable (2 x 0.25²)
<b>GMF 15/81</b> Sensor: KTY 81-121 -50 ... +60°C	<b>Immersion/touching/air sensor</b> 	<b>Sensor tube:</b> V4A <b>Cable:</b> flexible silicone cable (2 x 0.25²), approx. 1m long
<b>GMF 15/180</b> Sensor: KTY 83-110 -50 ... +60°C		
<b>GMF 30/180</b> Sensor: KTY 83-110 -50 ... +60°C	 * Replacement for KTY 11-6 in the range -20 ... +60°C	<b>Sensor tube:</b> aluminium head, Ø 8.4 mm <b>Cable:</b> flexible silicone cable (2 x 0.25²), approx. 30 cm long
<b>GMF 30/210 *</b> Sensor: KTY 81-210 -50 ... +60°C		upcharge per m of silicone cable
<b>GMF 30/180 V4A</b> Sensor: KTY 83-110 -50 ... +175°C		<b>Sensor tube:</b> V4A-head, Ø5 mm <b>Cable:</b> approx. 1 m of highly flexible silicone cable.
<b>GMF 30/81 V4A</b> Sensor: KTY 81-121 -50 ... +150°C		<b>Sensor tube:</b> V4A-head, Ø 6 x 46 mm <b>Cable:</b> approx. 1 m of silicone cable.



# Industrial temperature probes (ATEX 100)

For all potentially explosive atmospheres of the equipment-group II with the protection (i) or (e)

## GTF 101-Ex

-200°C ... +100°C (without neck tube)  
-200°C ... +900°C (with neck tube)

Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Mounting is done via separate clamping ring fittings GKV.

without neck tube, for temperatures ≤100°C



with neck tube, for temperatures >100°C



**Sensors:** Pt100, Pt1000, mineral insulated element, 4-wire: meas. range: -200°C ... +100°C (600°C - with neck tube), DIN cl. B  
type K or N, mineral insulated thermocouple: meas. range: -200°C ... +100°C (900°C - with neck tube), class 1  
**Probe length:** up to 100mm (without upcharge) **upcharge per further starting 100mm**  
**Neck tube length:** without (without upcharge) **upcharge per starting 100mm**

**Probe diameter:** 3mm, 4mm, 5mm, 6mm or 8mm

**Cable:** silicone cable, standard length 1m

**upcharge per further starting m cable**

**Ambient temperature:** -20...+60°C (protection type "e") resp. -20...+80°C (protection type "i")

**Type of protection:** "i" : intrinsic safety (without upcharge) "e": increased safety

**Potentially explosive atmospheres:** suitable for zone 1, zone 2, zone 21, zone 22

**Clamping ring screw connection:** available at M8x1, M10x1, G1/4" and G1/2" for diameter 3mm, 6mm or 8mm. Please refer to page 136

To determine exact order name ask for our type list. Download via homepage possible (Products -->Ex-Protection-->Temperature probes).

## GTF 102-Ex

-200°C ... +100°C (without neck tube)  
-200°C ... +900°C (with neck tube)

Readily assembled voltage free temperature probe of stainless steel with connection cable. The sensor inset is not exchangeable. Thread is welded or brazed to the probe.

without neck tube, for temp. ≤100°C



with neck tube, for temperatures >100°C



**Sensors:** Pt100, Pt1000, mineral insulated element, 4-wire: meas. range: -200°C ... +100°C (600°C - with neck tube), DIN cl. B  
type K or N, mineral insulated thermocouple: meas. range: -200°C ... +100°C (900°C - with neck tube), class 1  
**Probe length:** up to 100mm (without upcharge) **upcharge per further starting 100mm**  
**Neck tube length:** without (without upcharge) **upcharge per starting 100mm**

**Probe diameter:** 3mm, 4mm, 5mm, 6mm or 8mm

**Thread:** G1/2" (standard)

G1/8", G1/4", G3/8", G3/4", M8x1, M10x1

**Cable:** silicone cable, standard length 1m

**upcharge per further starting m cable**

**Ambient temperature:** -20...+60°C (protection type "e") resp. -20...+80°C (protection type "i")

**Type of protection:** "i" : intrinsic safety (without upcharge) "e": increased safety

**Potentially explosive atmospheres:** suitable for zone 0/1, zone 1, zone 2, zone 20/21, 21, zone 22


To determine exact order name ask for our type list. Download via homepage possible (Products -->Ex-Protection-->Temperature probes).

## GTF 103-Ex


-200°C ... +100°C (without neck tube)  
-200°C ... +900°C (with neck tube)

Readily assembled voltage free temperature probe of stainless steel connection head and clamping block. The sensor inset is exchangeable. Thread is welded or brazed to the probe. Mounting is done via clamping ring fitting or thread welded / brazed to the probe tube. The connection head is also suitable to carry a head transmitter.

without neck tube, for temp. ≤100°C

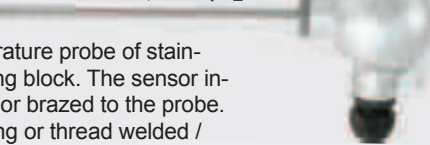

with neck tube, for temperatures >100°C

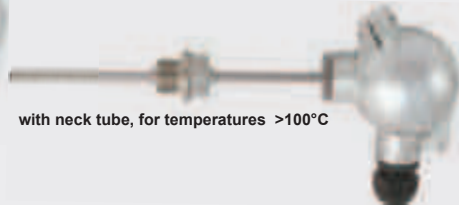

**Sensors:** Pt100, Pt1000, mineral insulated element, 4-wire: meas. range: -200°C ... +100°C (600°C - with neck tube), DIN cl. B  
type K or N, mineral insulated thermocouple: meas. range: -200°C ... +100°C (900°C - with neck tube), class 1  
**Probe length:** up to 100mm (without upcharge) **upcharge per further starting 100 mm**  
**Neck tube length:** without (without upcharge) **upcharge per starting 100 mm**

**Probe diameter:** 3 mm (the sensor inset is **not** exchangeable)  
4 mm, 5 mm, 6 mm or 8 mm (the sensor inset exchangeable)

**Thread:** G1/2" (standard) or without thread

G1/8", G1/4", G3/8", G3/4", M8x1, M10x1

**Ambient temperature:** -20...+60 °C (protection type "e") resp. -20...+80 °C (protection type "i")

**Type of protection:** "i" : intrinsic safety (without upcharge) "e": increased safety

**Potentially explosive atmospheres:** suitable for zone 0, zone 1, zone 2, zone 20, zone 21, zone 22

**Transmitter:** GITT 01-Ex (please refer to page 105), output signal 4-20 mA, measuring range on customers demands protection type "i" intrinsic safety. For suitable active Ex-barrier please refer to page 106

**Clamping ring screw connection:** available at M8x1, M10x1, G1/4" and G1/2" for diameter 3 mm, 6 mm or 8 mm. Please refer to page 136

To determine exact order name ask for our type list. Download via homepage possible (Products -->Ex-Protection-->Temperature probes).


# Industrial temperature probes

customized products can only be ordered written and can generally not be exchanged!

## GTF 101

-200 ... +1150°C (depending on sensor)

pre-assembled according to customer specification

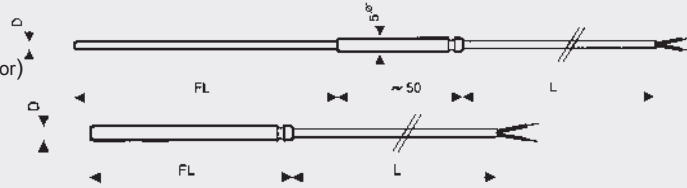

for Ø3mm, FL=100, L=1m of silicone cable

Final price can only be determined after receipt of customer specification!

Please contact us to find out which dias are available for our various sensors.

**Available sensors:** Pt100 (2-/ 3- or 4-wire), NiCr-Ni, Pt1000 and others - please contact us!

**Measuring range:** Pt100/Pt1000: -50 ... +400°C (others upon upcharge), NiCr-Ni: -200 ... +1150°C

**Tube material:** V4A

FL= please specify probe length upon order (in mm)

Basic price valid up to = 100mm, upcharge each started additional 100mm

D = Ø 0.5 mm to Ø 8.0 mm. - please specify Ø upon order (available Ø: 0.5, 1.0, 1.5, 2.2, 3.0, 4.0, 5.0, 6.0, 6.7, 8.0, 10.0)

At probe diameters below 4 mm an additional sleeve of Ø 5 mm and 50 mm length is mounted.

Basic price valid for D>3mm. Dias < 3mm upon request

L = desired cable length, cable screening (e.g. PVC, silicon, teflon, glass silk etc.) and wire quantity (e.g. 2-, 3- or 4-wire) to be specified on order. Basic price valid for silicone cable, 1m.

for upcharge p.r.t. page 137

**Additional specification:** a) temperature range

b) ambient temperature


c) plug or other cable connection

**Please note:** depending on tube diameter the sensor design may deviate from figure.

## GTF 102

-200 ... +1150°C (depending on sensor)

pre-assembled according to customer specification

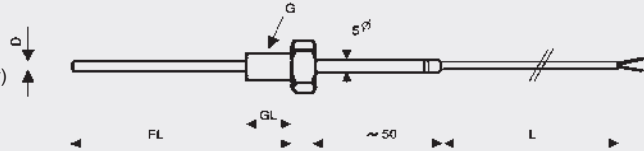

Final price can only be determined after receipt of customer specification!

Please contact us to find out which dias are available for our various sensors.

**Available sensors:** Pt100 (2-/ 3- or 4-wire), NiCr-Ni, Pt1000 and others - please contact us!

**Measuring range:** Pt100/Pt1000: -50 ... +400°C (others upon upcharge), NiCr-Ni: -200 ... +1150°C

**Tube material:** V4A

FL= please specify probe length upon order (in mm)

Basic price valid up to = 100mm, upcharge each started additional 100mm

D = Ø 0.5 mm to Ø 8.0 mm. - please specify Ø upon order (available Ø: 0.5, 1.0, 1.5, 2.2, 3.0, 4.0, 5.0, 6.0, 6.7, 8.0, 10.0)

Basic price valid for D>3mm. Dias < 3mm upon request

L = desired cable length, cable screening (e.g. PVC, silicon, teflon, glass silk etc.) and wire quantity (e.g. 2-, 3- or 4-wire) to be specified on order. Basic price valid for silicone cable, 1m.

for upcharge p.r.t. page 137

G = please specify thread desired: e.g. M5 or G1/2" etc. **Material:** stainless steel

(Available threads: M5, M6, M8, M10, M12, G1/4", G3/8", G1/2", G3/4", M10x1, M12x1.5, M14x1.5). Basic price valid for all threads

GL = specification only required if max. lengths must not be exceeded; unless this is the case glandings acc. to DIN910 are used; for smaller threads certain standard lengths are used. Basic price valid for all threads certain

**Additional specification:** temperature range, ambient temperature, plug or other cable connection

### Ordering example:

GTF102, Pt100, -50...400 °C, FL=100 mm, D=3 mm, KL=1 m, teflon cable, 4-wire

GTF102, NiCr-Ni (type K), -50...1150 °C, FL=300 mm, D=3 mm, KL=2 m, silicone cable

## GTF 200 Pt100

-50 ... +200°C, Pt100, 4-wire

Sensor: Pt100, DIN cl.B (±0,3°C at 0°C)



Sensor sleeve made of st. steel

Cable: silicone (4 x 0.14²), approx. 1m

suitable for 2-/ 3- or 4-wire probe

## GTF 200 Pt100 WD

-20 ... +105°C, Pt100, 4-wire

tube enclosed water proof!

Sensor: Pt100, DIN cl.B (±0,3 °C at 0 °C)

Sensor sleeve made of st. steel

Cable: PVC (4 x 0.14²), approx. 1m

suitable for 2-/ 3- or 4-wire probe


## GRO 200 Pt100

## GRO 200 Pt1000

-50 ... +200°C, DIN cl.B, 4-wire

## GRO 200 K

-50 ... +200°C, NiCr-Ni (type K)

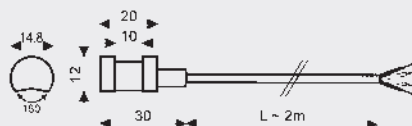

Sensor body made of aluminium

Cable: silicone, approx. 2 m

Probe can be mounted with cable clamp or similar constructions to pipes


For faster heat exchange we suggest our heat-conductive paste **GWL10G**

# Industrial temperature probes

customized products can only be ordered written and can generally not be exchanged!  
(Del. time from stock or 1 to 2 working days)

## GTF 103 (basic design)

## GTF 103 OS (without sensor and terminal)

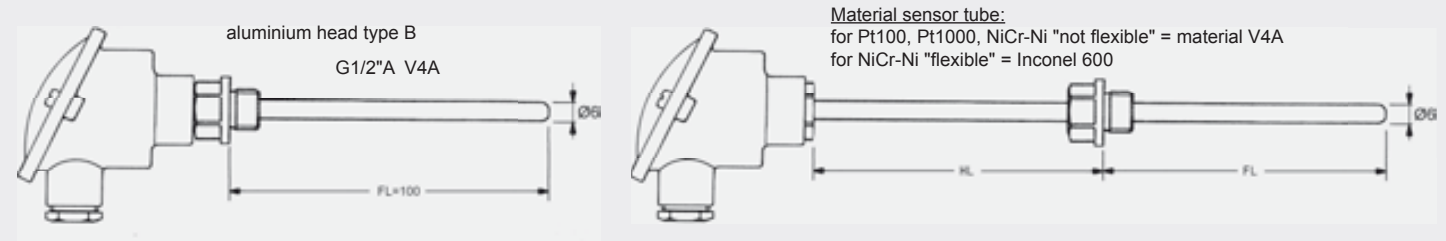

### Sensor:

#### Pt100 / Pt1000 (2-, 3- or 4-wire)

- 50 ... + 400°C, DIN class B
- ±200°C, DIN class B
- 50 ... + 600°C, DIN cl. B, Jacket-Pt100 p.r.t. Probe Diameter

#### Double - Pt100 (2 x 2-wire) - others on request

- 50 ... + 400°C, DIN class B
- ±200°C, DIN class B
- Double jacket Pt100

#### NiCr-Ni (type K)

- 200 ... + 1150°C, class 1

#### Double - NiCr-Ni (type K)

- 200 ... + 1150°C, class 1

### Sensor Head:

- DIN B head (Alu lacquered), max. 200°C  
*note: for higher temperatures order with neck tube*
- plastic sensor head
- stainless steel sensor head
- small sensor head (design type DE)  
with PG9-cable glanding
- with exchangeable measuring insert

### Thread:

*Note: other threads are not available for small series!  
(For larger series on request)*

- without thread  
*for interchangeable sensor application in combination with immersion sleeve EST01 or with stainless steel clamping ring glanding for exact adjustment of sensor position.*
- thread G $\frac{1}{2}$ " (V4A)  
*for fixed mounting or for interchangeable sensor in combination with immersion sleeve EST02.*
- thread G $\frac{1}{4}$ ", G $\frac{3}{8}$ " (V4A)
- other thread

### Tube length: (Pt100/1000 and NiCr-Ni)

- Probe length "FL" up to 100mm
- Probe length per each started additional 100 mm
- Neck tube length "HL" each started 100 mm  
*recommended for higher temperatures, because sensor head (without transmitter) is suitable just up to 200°C or for bridging insulations.*
- Insertion spike
- Teflon coat (100 mm, Ø 1,5 / 3 / 4 / 5 / 6)

### Probe diameter:

*note: other diameters than stated below are not available!*

#### Pt100 / Pt1000

- Ø 6 mm, not flexible
- Ø 3, 4, 5 or 8 mm, not flexible
- Ø reduced at the end (e.g. 8 to 3 mm)

#### Jacket-Pt100

- Ø 6 mm, approx. 40 mm stiff, then flexible
- Ø 3 mm, approx. 30 mm stiff, then flexible

#### NiCr-Ni (type K), not potential-free

- Ø 6 mm, not flexible
- Ø 3 mm, not flexible

#### NiCr-Ni (type K), jacket thermo element, potential-free

- Ø 6 mm, flexible
- Ø 1, 1.5 or 3 mm, flexible
- Ø 0.5 mm, flexible

### Special design types:

... / **RT420** with transducer for Pt100,  
Output signal 4-20mA, measuring ranges p.r.t. page 100  
(to be stated on order!)

... / **T03 BU** with transducer for Pt100,  
Output signal 0-10V, measuring ranges p.r.t. page 99  
(to be stated on order!)

... / **GITT** with electrically isolated transducer  
for Pt100/1000, NiCr-Ni, output signal 4-20mA, measuring range to be  
stated on order! (p.r.t. page 105)

*other design types upon request*

## Probe with elbow-type plug



## GTF 104 ...

Please state probe length (FL) at order

- protection tube made of stainless steel
- different length available
- applicable for
  - refrigeration engineering
  - heating installations / furnace construction
  - apparatus construction

### GKV

Clamping ring screw connection (p.r.t.p. 134)

### Specifications:

Sensor:

**Pt100:** 4-wire, sheath element  
Measuring range: -50 ... +600 °C

**NiCr-Ni:** type K, class 1, sheath element  
Measuring range: -50 ... +1150 °C

**Pt1000:**

Diameter: D = 6 mm

Probe length: FL = 50 / 100 / 200 / 400 mm

Electric connection: type plug acc. to DIN EN 175301-803  
(max. 70°C)


### GTF 104 Pt100

FL	50 mm	100 mm	200 mm	400 mm

### GTF 104 K (NiCr-Ni, type K)

FL	50 mm	100 mm	200 mm	400 mm

# water proof, hermetically sealed temperature probes for use in aggressive environments and tight places

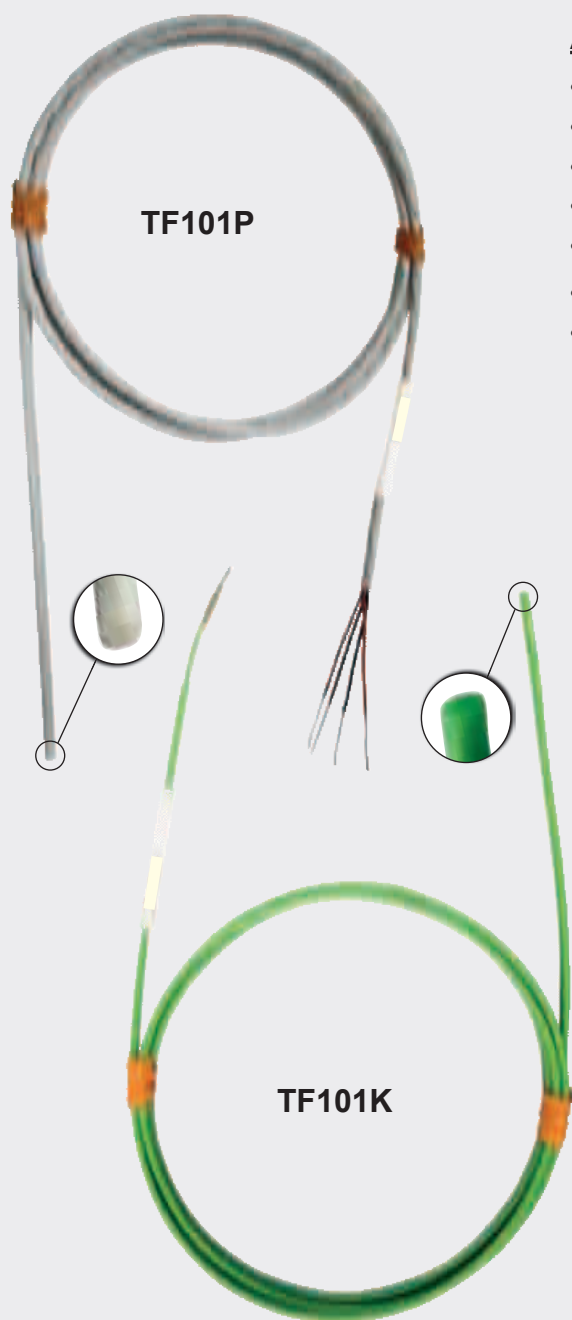

## Advantages:

- highly resilient to chemicals and oils
- sealed against moisture and corrosion
- easily cleaned and sterilised
- food safe
- small size provides a fast response
- also available in custom lengths
- optionally with mechanical protection (V4A-sleeve) and with thread or clamping ring screw connection available.

## Design type Pt100

**TF101P-1m** Pt100, cable length 1 m

**TF101P-2m** Pt100, cable length 2 m

**TF101P-3m** Pt100, cable length 3 m

- flexible sealed PFA Pt100 sensor
- 4-wire-connection (4 x 0.14 mm<sup>2</sup>, nickel-plated copper)
- nominal diameter: 2.1 mm
- accuracy according to DIN class A
- measuring range: -60 ... +250 °C
- also available with Pt1000

## Design type NiCr-Ni (type K)

**TF101K-1m** NiCr-Ni, cable length 1 m

**TF101K-2m** NiCr-Ni, cable length 2 m

**TF101K-3m** NiCr-Ni, cable length 3 m

- These PFA insulated thermocouple wire sensors are hermetically seal-welded at the sensor tip to provide continuous PFA protection over the measurement junction.
- stranded NiCr-Ni-thermocouple wire (0.14 mm<sup>2</sup>)
- nominal cross section: 1.6 mm x 2.5 mm
- measuring range: -270 ... +250 °C
- IP68 seal-welded tip
- electrically-insulated junction
- also available with thermocouples type J, T and E

## Option:

- Water proof probe with robust V4A protective tube  
Ø 3 mm, FL = 50 mm



## Average temperature probe

**MWF 100** Pt100 (2-, 3- or 4-wire)

### General description

The bendable average temperature probes are measuring the average temperature over the whole length of the probe and not like the standard probes only on the sensor tip.

There are short probe length of a little centimetres as well as length of any metres (e.g. 30 m) feasible.


Application area: Measuring of the average value at long heating or cooling elements, air ducts etc.

**Tell us your requested application. We will offer you the an individual sensor construction !**

# Self-adhesive temperature probes

## with moulded silicone design for surface measurement on curved and flat surfaces

<b>GOF 112 Pt</b>	Pt100, 35 x 12 mm, cable length 2 m, white
<b>GOF 112 K</b>	NiCr-Ni, 35 x 12 mm, cable length 2 m, green
<b>GOF 115 Pt</b>	Pt100, 15 x 50 mm, cable length 2 m, white
<b>GOF 115 K</b>	NiCr-Ni, 15 x 50 mm, cable length 2 m, green

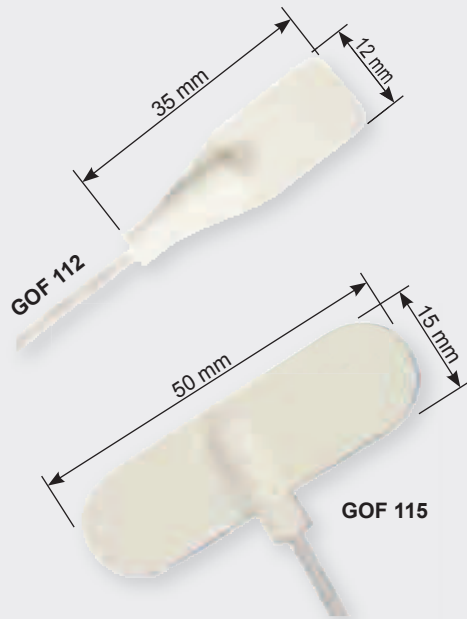

### Advantages:

- sensor have adhesive back for easy mounting
- ultra-slim silicone rubber for maximum flexibility
- resistant to a variety of chemicals and oils
- PFA-insulated connection cable, 2 m long (other length up on request)
- 2 designs for flat (GOF 112) or curved (GOF 115) surfaces available

### Design type Pt100

- precision Pt100-probe, DIN class A, 4-wire connection
- temperature range: -50 ... +200 °C
- also available with Pt1000

### Design type NiCr-Ni (type K)

*The integral thermocouple sensor is bonded onto the inner surface of the self adhesive aluminum foil strip, which is provided for fast response time*

- stranded NiCr-Ni-thermocouple wire (0.14 mm<sup>2</sup>)
- temperature range: -50 ... +200 °C
- also available with thermocouples type J, T and E

## "Cement-On" thermocouples


### General description

The series GOF 120 are a model line of Cement-On, fast response thermocouples for fast surface temperature measurement. The model line have 3 different styles. (Please order the high temperature cement separately)

The **design styles 1 and 2** are made from 0.013 mm thermocouple alloy foil by a special process where the butt welded thermocouple junction is 0.013 mm in thickness. The thermocouples are fabricated from class 1!

These styles are flat, extremely low inertia construction and are ideal means of measuring the temperature of both flat and curved metals, plastic and ceramic surfaces where very fast response is desired.

The **design style 3** is an economy version constructed from 0.25 mm diameter bead welded standard limit of error thermocouple wire. It should be used where extremely fast response time is not essential.

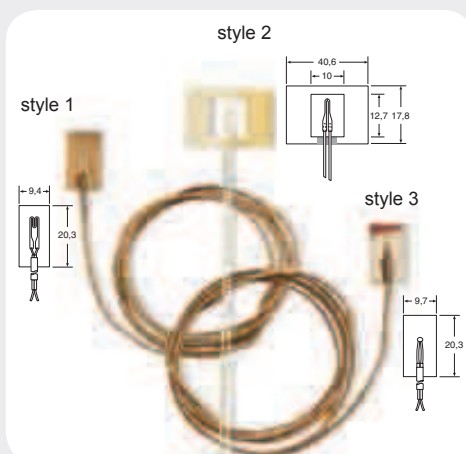

**GOF 120 - K1** NiCr-Ni, cable length 90 cm, max. 260°C (short-time: 370°C)

**GOF 120 - K2** NiCr-Ni, cable length 15 cm, max. 540°C (short-time: 650°C)

**GOF 120 - K3** NiCr-Ni, cable length 90 cm, max. 260°C (short-time: 370°C)

**OB-700** high temperature chemical set cement, 235 ml (max. 871°C)

### Highlights:

- ultra fast response time  
(style 1:  $t_{63}$  = approx. 20 ms, style 2: approx. 5 ms, style 3: approx. 300 ms)
- very low thermal inertia
- also available with thermocouples type J (only design 3), T and E
- style 1 and 3 optionally available with other lengths

*Please note: cannot be used with high temperature cement (will break down insulation)*



# Industrial probes

## for food-, beverage- and pharma industry

In case of interest, please ask for the **GHM** Industrial probes brochure.



### GTL ...

#### Probes according to customer specification

<b>Measuring range:</b>	-40 ... +200°C (depending on probe construction)
<b>Sensor:</b>	Pt 100
<b>Process connection:</b>	M12 / G1/2" / without thread
<b>Probe head:</b>	probe head Ø 59 mm probe head Ø 18 mm Long (with transmitter) probe head Ø 18 mm Short (without transmitter)
<b>Material:</b>	sensor head: V2A, protection tube and peak: V4A
<b>Probe length:</b>	according to customer specification (in mm)
<b>Diameter:</b>	Ø 6 mm without contraction Ø 4 mm without contraction Ø 6 mm with offset probe peak Ø 3 mm
<b>Response Time:</b>	Peak Ø 6 mm: $T_{90} \leq 8,0$ s Peak Ø 4 mm: $T_{90} \leq 6,5$ s Peak Ø 3 mm: $T_{90} \leq 1,5$ s
<b>Protection class:</b>	IP69K / IP67
<b>Options:</b>	Neck tube Electr. connection: fixed cable (PG) or M12-plug Integrated transmitter Higher accuracy (1/3 DIN Kl. B or 1/10 DIN Kl. B) Display

## Accessories

### 1. Clamping ring screw connection GKV... st. steel (for all probes without thread)



Type:	Outside thread	Clamp. ring-Ø (sensor tube-Ø)	Clamping ring			
GKV1	M8 x 1	1,5 mm	Teflon			
GKV2			st. steel			
GKV3		3,0 mm	Teflon			
GKV4			st. steel			
GKV5	G1/4"	1,5 mm	Teflon			
GKV6			st. steel			
GKV7		3,0 mm	Teflon			
GKV8			st. steel			
GKV11		6,0 mm	Teflon			
GKV12			st. steel			
GKV9		G1/2"	6,0 mm		Teflon	
GKV10					st. steel	
GKV13	8,0 mm		Teflon			
GKV14			st. steel			
GKV15	14,0 mm		Teflon			
GKV16	M10x1	6,0 mm	st. steel			


### 2. Flat-pin connections, free from thermal e.m.f. ( for type K, N and S)



NST 1200  
NST 1300  
NST 1700



NKU 1200 O  
U-coupling for installation in  
front panels




NKU 1200  
NKU 1700

NST 1200 "K"  
NKU 1200 "K"  
NKU 1200 O "K" (max. 120°C)  
NST 1300 "N"  
NST 1700 "S"  
NKU 1700 "S"

For higher temperatures use ceramic plug and coupling - price upon request.

### 3. Immersion sleeve of stainless steel


#### 3.1. Immersion sleeve EST01 for all probes without thread .

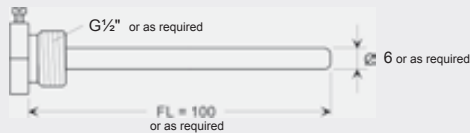

#### Basic price for 100mm

standard: G1/2", FL=100mm, outside-Ø = 6mm  
for probes with 5mm Ø  
customized lengths, diameters or threads are possible against upcharge - to be stated on order!

#### 3.2. Immersion sleeve EST02 for all probes with a G1/2"-thread.

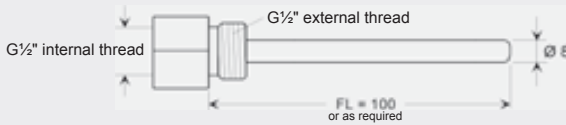

#### Basic price for 100mm

standard: G1/2" (internal/external), FL=100mm,  
outside-Ø = 8mm for probes with 6mm Ø  
customized lengths, diameters or threads are possible against upcharge - to be stated on order!

For faster heat exchange we suggest:

**GWL10G** heat-conductive paste 10 g

### 4. Cables and lines

#### 4.1. Silicone cable (max. 200°C) with teflon screened wires

**S2P:** silicone cable, 2-pole (2 x 0.25 mm<sup>2</sup>), highly flexible

**S4P:** silicone cable, 4-pole, 4 x 0.14<sup>2</sup> cross section (insulation 2 x blue, 2 x white)  
(can also be used as 3-wire)

#### 4.2. Glass silk insulated cable (max. 400°C) with stainless steel braiding

**G2P:** glass silk insulated cable, 2-pole (2 x 0.22 mm<sup>2</sup>)

**G3P:** glass silk insulated cable, 3-pole (3 x 0.22 mm<sup>2</sup>)

**G4P:** glass silk insulated cable, 4-pole (4 x 0.22 mm<sup>2</sup>)

#### 4.3. Teflon insulated cable (max. 250°C) with individual teflon insulated wires

**T2P:** teflon insulated cable, 2-pole (2 x 0.14 mm<sup>2</sup>)

**T3P:** teflon insulated cable, 3-pole (3 x 0.14 mm<sup>2</sup>), with additional cable screen

**T4P:** teflon insulated cable, 4-pole (4 x 0.14 mm<sup>2</sup>), with additional cable screen

#### 4.4. PVC-lines (max. 70°C)

**P2P:** PVC cable, 2-pole (2 x 0.14 mm<sup>2</sup>)

**P3P:** PVC cable, 3-pole (3 x 0.14 mm<sup>2</sup>)

**P4P:** PVC cable, 4-pole (4 x 0.14 mm<sup>2</sup>)

#### 4.5. Extension cable for NiCr-Ni (Type K)

**VKA 1m:** 1 m Silicon-Compensation lines with DIN plug and DIN coupler

#### 4.6. Compensation lines for NiCr-Ni (type K), 2-wire

**AGL1:** Silicone cable (2 x 0.22 mm<sup>2</sup>) (max. 200°C)

**AGL3:** Thermo wire (can also be used as thermo couple) glass silk (2 x 0.5 mm<sup>2</sup>) (max. 400°C)

**AGL4:** Teflon screened twisted thermo wire, wire-Ø 0,2 mm (max. 250°C)

**AGL5:** Thermo wire, with glass silk braiding, wire-Ø 0,2 mm (max. 400°C)

**AGL6:** Teflon cable, screened - can also be used as thermo couple (2 x 0.22 mm<sup>2</sup>) (max. 250°C)

#### 4.7. Compensation lines for Pt10RH-Pt (Type S), 2-wire

**AGL S2:** Silicone cable (max. 200°C)


#### 4.8. Compensation lines for NiCrSi-NiSi (Type N), 2-wire

**AGL N2:** Silicone cable (max. 200°C)

### 5. Metal flange (for GTF 1500/... and GTF 103HT-S)

**GMFL:** acc. DIN 43734, adjustable, to clamp to 15mm stainless steel pipes, sliding

### 6. Sensor elements (Pt100/1000, NTC's, PTC's) NiCr-Ni p.r.t. pages 126-127



Type:	Description, dimensions	meas. range	tolerance
Pt100/1	Ceramic lamina, 2 x 2.3 x 0.6 mm	-50 ... +500°C	B
Pt100/2	Ceramic lamina, 2.5 x 2.0 x 1.3 mm	-50 ... +500°C	1/3 DIN
Pt100/3	Ceramic lamina, 2 x 5 x 0.9 mm	-196 ... +500°C	B
Pt100/4	Wound design, Ø2 x 20 mm	-200 ... +600°C	B
Pt100/5	TO92-housing	-50 ... +150°C	B
Pt100/6	Ceramic lamina, 1 x 3 x 0.6 mm	-50 ... +500°C	B
Pt1000/1	Ceramic lamina, 2 x 4 x 0.9 mm	-50 ... +400°C	B
Pt1000/2	TO92-housing	-50 ... +150°C	B
Pt1000/3	Ceramic lamina, 1 x 3 x 0.6 mm	-50 ... +500°C	B
KTY 81-210	Replacement for KTY 11-6	-20 ... +110°C	
KTY 81-121	1kOhm (25°C), TO92-housing	-50 ... +150°C	
KTY 83-110	1kOhm (25°C), DO-34-housing	-50 ... +175°C	
KTY 84-130	1kOhm (100°C), DO-34-housing	-40 ... +300°C	

Other sensors upon request

# Alarm and Protection Devices

	Application							Description	Page
	Universal Application	Level controller	Water leak detector	Electrodes incl.	Alarm buzzer	Switching output	Water supply is switched of		

## ALARM DEVICE

MINAL 182	✓		✓		✓			Miniature alarm device (Battery operation)	139
MINAL 282 BN	✓		✓		✓			Miniature alarm device (Battery / mains operation)	139

## ALARM AND PROTECTION DEVICE (Home- and Handicraft)

ALSCHU 480	✓		✓		✓	✓		Alarm and protection device (switching output via SCHUKO socket)	140
ALSCHU 480 P	✓		✓		✓	✓		Alarm and protection device (potential-free switching output and SCHUKO socket is current-carrying)	140
ALSCHU 485		✓		✓	✓	✓		Electrode control device incl. two 2-pin electrodes	140
ALSCHU 485 OE		✓			✓	✓		Electrode control device with connection for two 2-pin electrodes	140
ALSCHU 485 OE / 3P		✓			✓	✓		Electrode control device with connection for two 3-pin electrodes	140
GEWAS 181 A			✓	✓	✓	✓	✓	Water leak detector with 1/2" brass solenoid valve with 3/4" connections for switch-off	141
GEWAS 183 A			✓	✓	✓	✓	✓	Water leak detector without solenoid valve, with switch-off	141
GEWAS 181 A - 1/2"			✓	✓	✓	✓	✓	Water leak detector with 1/2" brass solenoid valve and switch-off	141
GEWAS 181 A - 3/4"			✓	✓	✓	✓	✓	Water leak detector with 3/4" brass solenoid valve and switch-off	141
GEWAS 181 A - 1"			✓	✓	✓	✓	✓	Water leak detector with 1" brass solenoid valve and switch-off	141
GEWAS 191 N			✓	✓	✓		✓	Water leak detector with 3/4" solenoid valve	142
GEWAS 191 AN			✓	✓	✓	✓	✓	Water leak detector with 3/4" solenoid valve and switch-off	142

## ALARM AND PROTECTION DEVICE (Industry)

GEWAS 200	✓					✓		Alarm and protection device for panel mounting	142
GEWAS 300 SG	✓					✓		Alarm and protection device for panel mounting	143
GEWAS 300 FG	✓				✓	✓		Alarm and protection device in field housing	143
ALSCHU 300 SG	✓	✓				✓		Alarm and protection device for panel mounting	139
ALSCHU 300 FG	✓	✓				✓		Alarm and protection device in field housing	139

## LEVEL MONITOR

GMNV-1C								Level module (- detector)	144
GNS 20E - 200								Limit detector	144
GNS 20E - 500								Active output	144
GNS-3P-SLV								Level monitor with micro-switch / reed contact	145
GNS-3P-SLK								Level monitor with micro-switch / reed contact	145
GNS-3P-SLE								Level monitor with micro-switch / reed contact	145
GNS-3P								Level monitor with micro-switch / reed contact	145
GSS-F25								Level monitor with micro-switch / reed contact	145

## Miniature alarm device for universal application battery or mains operation



### MINIATURE ALARM DEVICE for universal application

#### MINAL 182

Battery operation

#### MINAL 282 BN

Battery/mains operation

#### Devices without sensors

**Application:** extra loud alarm (more than 100 dB at 1 m distance), hence suitable for decentralised use (eg in basement etc.). After connection of various sensors device can be used as water detector, burglar alarm, fire alarm (overheating), heating failure detector, level detector, rain detector etc..

**Advantages:** mobile, no power consumption unless alarm sounded; connection of any number of sensors, separately or simultaneously; loud alarm that cannot be missed.

#### Specification:

**Device:** rocker switch for tightening and alarm extinguishing, audible piezo-alarm, power consumption in case of alarm approx. 20 mA. Permanent alarm can be sounded for at least approx. 10 h.

ABS case 100 x 60 x 29 mm (H x W x D)

**Operating voltage:** 9 to 12 VDC, battery 9 V type IEC 6F22 included, for MINAL 282 BN additional socket for plug-in of external power supply GNG09 for permanent operation.

MINAL 182 only suitable for battery operation.

**Sensors:** jack for connection of any sensor type (see special accessories).

**Weight:** approx. 105 g (incl. battery - without sensor)

#### Accessories:

**GNG 09 - 3.5KS** power supply

**GWF-1S** plug-in water sensor, 2m

**GWF-1S/5m** plug-in water sensor, 5m

**GWF-1S/10m** plug-in water sensor, 10m

**GAZ-1** branch adapter (required for each additional water sensor)

**VEKA 2** extension cable 2m

**VEKA 5** extension cable 5m

**VEKA 10** extension cable 10m

## Electrode controller with two signal inputs in 2 different mounting forms



### ALSCHU 300 FG

Electrode controller in **field frame** for wall mounting – device without sensor

### ALSCHU 300 SP

Electrode controller in **snap-on housing** for DIN rail mounting – device without sensor

#### Applications:

Automatic control of drainage pumps and wastewater lifting plants, overflow and low liquid level control, automatic filling and draining of tanks, level control of liquid reservoirs, aquariums, storage tanks, etc.

The ALSCHU 300 .. is especially suitable for detection of conducting media (water, etc.). It is less applicable for badly or non conducting media (oils or fatty liquids), conducting foaming liquids or media causing electrically isolating deposits on the electrodes.

#### Description:

The measuring method for level detection is based on the conductive principle, i.e. the electrical conductivity of the media is monitored. If the switching amplifier detects a value below the set conductivity the state "media detected" is output, otherwise "no media". Depending on number and design of the connected level sensors the device can be used for level detection (min-/max- detection) or as 2-point controller.

#### Specifications:

Power supply: 18 V ... 250 V AC/DC  
**wide-range power supply**

Power consumption: < 2 VA

#### 2 signal inputs:

Triggering level: < 80 kΩ

Response time: 2 s

#### 1 Relay output:

Contact: change-over contact, potential-free  
Switching voltage: ≤ 250 V AC  
Switching current: ≤ 5 A (ohmic load)

#### Protection class:

ALSCHU 300 SP: IP20

ALSCHU 300 FG: IP65

#### Electric connection:

ALSCHU 300 SP: connection via screw-type terminal  
ALSCHU 300 FG: connection via 3 PG cable glands and screw terminals

Working temperature: -20 ... +60 °C

Storage temperature: -40 ... +80 °C

Condensation: not allowed

#### Housing:

ALSCHU 300 SP: snap-on housing for DIN rail mounting 22.5 x 75 x 110 mm (W x H x D)  
ALSCHU 300 FG: field frame 100 x 100 x 60 mm (W x H x D) without PG cable glands

#### Functions / displays:

Red / green LED: display for switching state of relay, switching state of sensors, status (supply) of device

#### Accessories:

**GNS-3P** (p.r.t. page 117)

3-pole level probe

**GNS-3P-S..** (p.r.t. p. 117)

3-pole level probe with coating

**GSS-1** level sensor, 2m cable (floating switch) for electrically non-conducting media

**GNS-1** level sensor, 2-pole (stainless steel electrode)

**GSAS-1** magnetic contact, plug-in and self-adhesive



## Protection device for universal application with switching output for any purpose Available as plug-in



**ALARM PROTECTION DEVICE** with or without alarm transmitter and relay switching output (changeover contact)

### ALSCHU 480

plug-in for 230V~ (with grounding contact adapter plug)

### ALSCHU 480 P

as above, but with volt-free switching output

#### Description:

The ALSCHU 480(P) is a versatile alarm and protection device. Its universal input (3.5mm jack bush) allows a lot of different external sensors to be connected. That includes sensors with a switching threshold <100kOhm like water sensors, float switches, level switches, magnetic contacts, safety shut-off mat etc. In case of an alarm the internal buzzer sounds and a connected device (i.e. pump, machine) is switched on or off via the Schuko adaptor plug (ALSCHU 480). The desired switching function can be set via selector switch I / II. ALSCHU 480P switches on/off external devices via a potential-free 2-pole switching output. The Schuko socket of ALSCHU 480P is always current-carrying.

#### Specification:

<b>Power supply:</b>	220/240V 50/60Hz
<b>Power consumption:</b>	approx. 1 VA
<b>Sensor input:</b>	3.5mm jack bush
<b>Switching threshold:</b>	input resistance <100kOhm
<b>Switching output:</b>	
<b>480:</b>	via isolated ground receptacle (Schuko)
<b>480P:</b>	potential-free normally open/closed contact via 2-pole cable, brought out 0.5m
<b>Switching function:</b>	
<b>I:</b>	switching output current-carrying in alarm condition
<b>II:</b>	switching output currentless in alarm condition
<b>Switching power:</b>	
<b>480, 480P:</b>	250VAC, 10A (ohmic load), max. 2400VA
<b>480P:</b>	120VDC, 2 A (ohmic load), max. 240W

#### Controlling device:

**dimensions:** 112 x 71 x 48mm (L x W x H),  
**Working conditions:** -20...50°C / 0...80% RH

LED for operation display, device-on/off, selector switch I / II for switching function

#### Accessories:

**GWF-1S** plug-in water sensor, 2m  
**GSAS-1S** plug-in, self-adhesive magnetic contact

## Plug-in level controller no moving parts at all



**ELECTRODE CONTROL DEVICE** for filling or emptying

### ALSCHU 485

### ALSCHU 485 OE

(as above, but without electrodes - connect. for two 2-pin. electrodes)

### ALSCHU 485 OE / 3P

(as above, but without electrodes - connection for 3-pin electrode)

**We manufacture electrodes of any diameter and length according to your specifications**

#### Application:

automatic control of drain pumps and sewage removal plants, overflow and dry running protection, automatic filling and emptying of containers, basins, tanks, control of liquid level in storage tanks, aquariums, etc.

#### Advantages:

no installation costs, only plug-in connections, ready for use within seconds, trouble-free operation as no moveable float switches are used, any electrode distance, can be set by customer up to 2 m etc. etc..

#### Specification:

<b>Control device:</b>	housing 112 x 71 x 48 mm. Flashing LED indicating control state. Selector switch for emptying or filling. Plug-in socket for electrodes.
<b>Power supply:</b>	control device 230 V 50 Hz approx. 1 VA, automatic by connecting grounded adaptor plug.
<b>Control output:</b>	via grounded adaptor plug with earthing and socket outlet with earthing, electrode control. Direct switching capacity approx. 1200 VA at 230 V 50 Hz (approx. 5 A ohmic load). Extra high protective capacity by external triggering of a contactor or semiconductor relay.
<b>Electrodes:</b>	standard design: plug-in, stainless steel pins, plastic body and 2 m of PVC cable (any lengths against upcharge)

**Please note:** for media leaving residues (such as salt water, sewage etc.) we recommend a 3-pin electrode.



#### Accessories:

**GNS-3P** level probe 3-pin  
standard length: 15 cm,  
switching distance: 1cm, 2m cable  
further information p.r.t. page 145

No more water damage !



### GEWAS 181 A

leak-water detector with 1/2" brass solenoid valve with 3/4" connections for hand installation, water sensor, alarm buzzer and switch-off of connected units 16A, 230V~

### GEWAS 183 A

leak water detector without solenoid valve, with water sensor, alarm buzzer and switchoff of connected devices 16A, 230V~

### GEWAS 181 A - 1/2"

leak water detector with 1/2" brass solenoid valve (flow quantity: approx. 20 l/Min, installation length approx. 55mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16A, 230V~. Device is capable to drive more valves.

#### Application:

Any devices or machines with water connection. For direct mounting of solenoid valve in pipelines.

#### Electric specification:

##### **Solenoid:**

100 V DC, approx. 2 W. Full load of approx. 8 watt available when start button is pressed at approx. 200 V DC. Hence, valve operable in permanent mode; due to energy-saving circuit valve will not run hot even without cooling agent. Valve permanently fixed to control device (approx. 1 m of connecting cable). Valve body can be removed from coil after loosening of one nut.

##### **Water sensor:**

Highly sensitive, plug-in water sensor, 2 m of cable, alarm triggered as of 1/2 mm water film. Simultaneous plug in of several water sensors via socket-outlet adaptor GAZ1. Plug-in extension cable (2 m, 5 m or 10 m long) available.

##### **Alarm triggering:**

Solenoid closing in case of alarm, buzzer sounding and machine connected will be turned off by means of a single-pole one-way switch.

##### **Control device:**

112 x 71 x 48 mm (H x W x D) with suspension hook. Operating lamps, double-pole switch, start button, alarm buzzer, approx. 1 m of connecting cable with earthing pin plug and socket. Socket (16 A 230 V~) is alarm triggered, i.e. the device plugged-in will be disconnected in case of alarm.

##### **Power consumption:**

Approx. 3 W only due to energy-saving circuit of solenoid valve.

### GEWAS 181 A - 3/4"

leak water detector with 3/4" brass solenoid valve (flow quantity: approx. 91.5 l/Min, installation length approx. 80mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16A, 230V~

### GEWAS 181 A - 1"

leak water detector with 1" brass solenoid valve (flow quantity: approx. 141.5 l/Min, installation length approx. 95mm) for installation in the line, water sensor, alarm buzzer and switch-off of connected devices 16A, 230V~

#### Specification:

##### **Solenoid valve:**

Brass solenoid valve, energy-saving circuitry for hand installation (1/2" with 3/4" glanding - suitable for any 1/2" tap or 1/2" tube) or with 1/2", 3/4" or 1" internal thread on both sides for line installation. De-energised when closed, for pressure loads from 0.5 to 10 bar. Servo-controlled, i.e. free water outlet has to be provided resp. infeed pressure has to exceed outfeed pressure by 0.5 bar (solenoid not suitable for closed circuits such as heating systems).

#### Spare or additional solenoid valves:

- GMV-1/2" L** spare solenoid valve 1/2" for direct cable connection, approx. 1m cable, loose ends
- GMV-1/2" H** spare solenoid valve 3/4" manual mounting, approx. 1m cable, loose ends
- GMV-3/4"** spare solenoid valve 3/4" for direct cable connection, approx. 1m cable, loose ends
- GMV-1"** spare solenoid valve 1" for direct cable connection, approx. 1m cable, loose ends
- GMV-1/2" EZL** add. solenoid valve 1/2" for direct cable connection, with power saving connector, approx. 2W, for direct connection to 230VAC, suitable for GEWAS183A or mains operation
- GMV-1/2" EZH** like before, but 3/4" valve for manual mounting
- GMV-3/4" EZ** like before, but 3/4" valve for direct cable connection
- GMV-1" EZ** like before, but 1" valve for direct cable connection

#### Accessories:

Plug-in water sensor, socket outlet adapter, extension cable p.r.t. GEWAS 191

## No more water damage !

24-hour supervision of your washing machine and/or dish washer or any other devices using water.



### WATER LEAK DETECTOR WITH SOLENOID VALVE

## GEWAS 191 N

cpl. and ready for use incl. controller, water probe, solenoid, signal buzzer

## GEWAS 191 AN

cpl. as above but equipped with switch-off mechanism for supervised device in case of alarm (up to 16A, 220 V 50 Hz)

#### Application:

washing machine, dish washer, surgeries (eg dentists' surgeries, water-cooled devices etc.), hospitals, industry, research, laboratories, any other devices and machines with water connection (eg. hot drinks dispensers, cooling devices etc.)

#### Installation:

easy to install - even for unskilled persons - in two minutes without any additional parts or tools being required.

#### Solenoid valve:

glass-fibre reinforced polyamide (also used for washing machines). Extra low voltage for safety 12 V DC. Screw connections 3/4" for direct mounting to water tap or any other standard washing machine or dish washer connecting tube 1/2 " with 3/4" wing/union nut at valve outlet. Valve closes automatically in case of power failure. (Min. pressure difference between inlet and outlet: feed pressure min. 0.5 bar over discharge pressure)

#### Water sensor:

highly sensitive plug-in water probe, 2m cable. Alarm triggered as of 1/2 mm water film. Several water probes can be plugged-in and used simultaneously by means of socket outlet adaptor GAZ 1. 2m, 5m or 10m plug-in extension cable available.

#### Alarm triggering:

in case of an alarm the valve closes, the signal buzzer is sounding and the device connected is switched off (only for GEWAS 191 AN - single pole one-way switch)

#### Device housing with electronics:

enclosed case (not suitable for use in humid environment), electronics, signal buzzer, plug connections for valve and water sensor. Housing with earthing pin plug connection and socket outlet with earthing contact. Looping-in socket outlet with earthing contact used for GEWAS 191 A; alarm controlled socket outlet with earthing contact used for GEWAS 191 AN, i.e. up to 16 A (ohmic load) and 220 V 50 Hz will be switched off in case of alarm.

**Power consumption:** approx. 3 W only using energy-saving circuitry.

#### Accessories and spare parts:

**GMV191** spare solenoid

**GWF-1S** plug-in water sensor, 2m

**GWF-1S/5m** plug-in water sensor, 5m

**GWF-1S/10m** plug-in water sensor, 10m

**GAZ-1** branch adapter (required for each additional water sensor)

**VEKA 2** extension cable 2m

**VEKA 5** extension cable 5m

**VEKA 10** extension cable 10m

## Protection device for universal application with switching output for any purpose panel mounted device



## GEWAS 200

Panel-mounted alarm protection device with volt-free relay output (snap-on mounting for top hat rail in special snap-on housing) Without Sensor

The GEWAS 200 is a versatile DIN rail alarm and protection device. Its universal input (screw terminals) allows a lot of different external sensors to be connected. That includes sensors with a switching threshold <100kOhm like water sensors, float switches, level switches, magnetic contacts, etc. A connected device (i.e. pump, machine) is switched on or off via potential-free change-over contact in case of an alarm. The alarm is reset by the use of an internal / external reset button.

#### Specification:

**Power supply:** 220/240V 50/60Hz

**Power consumption:** approx. 3 VA

**Sensor input:** 2-pole screw terminal

**Switching threshold:** input resistance <100kOhm

**Switching output:** potential-free change-over contact

**Switching power:** 250VAC, 10A (ohmic load), max 2400VA

150VDC, 2A (ohmic load), max 240W

**Controlling device:** dimensions: 49 x 96 x 59mm (L x W x H)

LED (green) for operation display

LED (red) for alarm condition

**Mounting:** universal foot base for all common DIN EN rails

**Working conditions:** -20...50°C and 0...80% RH

#### Options:

- **KL:** Screw terminal (2-pole)  
to connect an external reset button

- **AL:** Automatic alarm reset

#### Accessories and spare parts:

**GWF-1** water sensor without plug, 2m

**GSS-1** level probe (plug-in float switch)  
for electrically non-conductive media (normally open/normally closed function can be selected by customer)

**GNS-1** plug-in level probe 2-pin (stainless steel electrodes)

**GSAS-1** plug-in, self-adhesive, magnetic contact

## Water monitor with one signal input and one relay output in 2 different mounting forms



**GEWAS 300 FG** Water monitor in **field frame** for wall mounting – device without sensor

**GEWAS 300 SP** Water monitor in **snap-on housing** for DIN rail mounting – device without sensor

### Applications:

Versatile alarm and protection device for DIN rail or surface mounting with universal input (screw-type terminals) for several external sensors. Sensors with switching threshold <100 kOhm can be connected (e.g. water probes, floating switches, level probes, magnetic contacts, etc.). In case of an alarm the connected device (e.g. pump, machine) is switched off by a change-over contact. The GEWAS 300 FG additionally provides an alarm. The internal or an external push-button resets the alarm state.

The GEWAS 300 .. is especially suitable for detection of conducting media (water, etc.). It is less applicable for badly or non conducting media (oils or fatty liquids), conducting foaming liquids or media causing electrically isolating deposits on the electrodes.

### Description:

The measuring method for level detection is based on the conductive principle, i.e. the electrical conductivity of the media is monitored. If the switching amplifier detects a value below the set conductivity the state "media detected" is output, otherwise "no media".

### Specifications:

Power supply: 18 V ... 250 V AC/DC  
**wide-range power supply**  
Power consumption: < 2 VA

#### 1 signal inputs:

Triggering level: < 80 kΩ  
Response time: 2 s

#### 1 Relay output:

Contact: change-over contact, potential-free  
Switching voltage: ≤ 250 V AC  
Switching current: ≤ 5 A (ohmic load)

#### external alarm output:

only GEWAS 300 FG: 8 V, 3 kHz, ≤ 5 mA

#### Protection class:

ALSCHU 300 SP: IP20  
ALSCHU 300 FG: IP65

### Electric connection:

GEWAS 300 SP: connection via screw-type terminal  
GEWAS 300 FG: connection via 3 PG cable glands and screw terminals

Working temperature: -20 ... +60 °C  
Storage temperature: -40 ... +80 °C  
Condensation: not allowed

### Housing:

GEWAS 300 SP: snap-on housing for DIN rail mounting  
22.5 x 75 x 110 mm  
(W x H x D)  
GEWAS 300 FG: field frame  
100 x 100 x 60 mm  
(W x H x D) without PG cable glands

### Functions / displays:

Red / green LED: display for switching state of relay, switching state of sensors, status (supply) of device, status of battery  
Acoustic alarm: internal alarm buzzer with battery back-up (only for GEWAS 300 FG)  
Battery back-up: Monitoring and acoustic alarm are ensured even e.g. during power failures (only for GEWAS 300 FG)  
Alarm reset: alarm reset by  
GEWAS 300 SP: connection for external push-button  
GEWAS 300 FG: push-button at front side

### Accessories:

**GWF-1** water sensor without plug, 2m cable  
**GWF-1/5m** water sensor without plug, 5m cable  
**GWF-1/10m** water sensor without plug, 10m cable  
**GSS-1** level sensor, 2m cable (floating switch) for electrically non-conducting media  
**GNS-1** level sensor 2-pole (stainless steel electrode)  
**GSAS-1** magnetic contact, plug-in and self-adhesive



## Level module conductive



NEW



Figure with option rail adapter

### GMNV-1C

#### General:

This module is used for evaluation of single levels with conductive level sensors. The module can be directly attached to the connection head of the level probes or snap on a hat rail with the optionally available rail adapter.

The GMNV-1C uses 3-wire connection technology and it converts the conducting connection between probe rod and ground to a DC switching signal. This signal can be directly interpreted and processed e.g. by a SPS.

- no additional level device needed at control cabinet
- low installation costs
- little amount of cabling
- high immunity

#### Specifications:

<b>Electrode connection:</b>	2-wire
<b>Sensitivity:</b>	0.1, 1, 10, 100 kOhm (selectable by jumpers)
<b>Auxiliary voltage:</b>	15 ... 36 V DC
<b>Output:</b>	active output
<b>Output voltage:</b>	auxiliary voltage - 10%
<b>Max. output current:</b>	50 mA (short-circuit proof)
<b>Switching function:</b>	full / empty detector (selectable by jumpers)
<b>Delay:</b>	0.5 seconds
<b>Working conditions:</b>	-10 ... + 60 °C 0 ... 95 % r.F. (non-condensing)
<b>Storage temperature:</b>	-20 ... + 60 °C
<b>Electric connection:</b>	via screw-type terminals
<b>max. wire diameter:</b>	2.5 mm <sup>2</sup>
<b>Housing:</b>	plastic
<b>Dimensions:</b>	Ø 44 x 20 mm (incl terminals)
<b>Mounting hole:</b>	Ø 4.5 mm
<b>Mounting distance:</b>	~ 33 mm (suitable for DIN B head)
<b>Weight:</b>	35 g
<b>Options:</b>	rail adapter

## Limit detector conductive



NEW



### GNS 20E - 200 GNS 20E - 500

Available from second quarter of 2013

#### General:

Conductive measuring principle, suitable for use with aqueous, conducting media.

Less suited for low- or non-conducting media and for foaming, adhesive or coating media.

#### Application:

- full / empty detector in tanks
- overflow protection
- protection against dry running

#### Specifications:

<b>Sensitivity:</b>	0.1, 1, 10, 100 kOhm (selectable by jumpers)
<b>Auxiliary voltage:</b>	15 ... 36 V DC
<b>Output:</b>	active output
<b>Output voltage:</b>	auxiliary voltage - 10%
<b>Max. output current:</b>	50 mA (short-circuit proof)
<b>Switching function:</b>	full / empty detector (selectable by jumpers)
<b>Delay:</b>	0.5 seconds
<b>Working conditions:</b>	-10 ... + 60 °C 0 ... 95 % r.F. (non-condensing)
<b>Storage temperature:</b>	-20 ... + 60 °C
<b>Electric connection:</b>	via screw-type terminals
<b>max. wire diameter:</b>	2.5 mm <sup>2</sup>
<b>Cable feedthrough:</b>	for cables with diameter 5 – 14 mm
<b>Connection head:</b>	aluminum DIN B head
<b>Dimensions:</b>	approx. 70 x 80 x 100 mm
<b>Thread:</b>	G ½ " (stainless steel)
<b>Protection class:</b>	IP67
<b>Electrode:</b>	stainless steel
<b>Dimensions:</b>	...-200: Ø 3 x 185 mm ...-500: Ø 3 x 485 mm
<b>Total length:</b>	...-200: approx. 220 mm (till thread end) ...-500: approx. 520 mm (till thread end) Electrodes can be shortened.

## 3-pin. probe for level control (conductive)



### GNS-3P-SLV

3 electrodes with Poliolefin coating

- cooling water
- all conductive liquids

### GNS-3P-SLK

3 electrodes with Kynar coating

- food and beverage industry
- chemical industry

### GNS-3P-SLE

3 electrodes with PTFE coating

- aggressive conductive liquids

#### General

- Coated electrodes
- Rugged construction, sealed
- EN 175301-803/A plug
- For all industrial, beverage and food applications
- Alarm or level regulation or dosage of liquids
- Protection class IP65
- Combined with control electronics (ALSCHU 300, ALSCHU 485 OE / 3P or MINAL) an accurate liquids level control system

#### Specification

Number of electrodes:	3 Piece
Length of electrodes:	1000 mm Probes can be cutted to needed length.
Electrical connection:	EN 175301-803/A Plug
Process connection:	G 1", Polypropylen
Pressure max.:	6 bar
Temperature max.:	+100 °C
Protection class:	IP65

#### Dimensions:

SW:	40 mm
A:	68 mm
B:	20 mm
L:	500 mm



## 3-pin. probe for level control (conductive)



### GNS-3P

3-pin. level probe

#### General

**Please note:** for media leaving residues (such as salt water, sewage etc.) we recommend a 3-pin electrode.

- For all industrial applications
- Alarm-, Level- and Doseregulation
- Optional teflon covered staffs
- Combined with control electronics (ALSCHU 300, ALSCHU 485 OE / 3P or MINAL) an accurate liquids level control system

#### Specification

Number of electrodes:	3 Piece
Length of electrodes:	150 mm, other length upon request, probes can be cutted to needed length.
Electrical connection:	2 m cable
Switching distance:	10 mm

#### Options:

##### other length available

Upcharge each beginning 10cm

##### Teflon covered staffs

only tip is uncovered (for electrodes used in salt water, ...)

#### Dimensions:

Elektrodenlänge:	150 mm
Elektroden Durchmesser:	3 mm
Elektronikbox:	55 x 35 mm (B x H)

#### Accessories

##### ALSCHU 485 OE / 3P

(p.r.t.p. 137) Electrode control device connection for 3-pin electrode

##### ALSCHU 300 ...

(p.r.t.p. 137) Electrode controller in 2 different mounting forms: field frame or snap-on housing

## Level Switch Standard Unit



### GSS-F25

#### General

The level switches offer to the user a simple and reliable solution in the liquid level control application. These standard units are available with cable length of 3,0 m.


The working principle is based on the movement of the magnetic float which drives the reed switch inside the level-stem. The cable and switch are epoxy sealed inside the stem and the sealing process is produced by a temperature controlled heating system.

A rugged and free of maintenance product.

- Constructions up to 180°C working temperature on request
- Protection class IP65
- Constructions ATEX on request

#### Specification

Float	PVDF
Density (S.G.)	≥ 0,65 g/cm <sup>3</sup>
Stem	PVDF
Pressure max.	6 bar
Temperature max.	130 °C
Contact	SPST (NO)
Power:	70 VA / 50 W
Voltage:	300 V AC / 300 V DC
Current:	0,5 A AC / 0,7 A DC
Cable	3,0 m
Connection	1/8"
Switching difference:	25 mm
Accuracy Switching point:	±3 mm
Working ambient temp.:	-30/+55°C / RH 90%

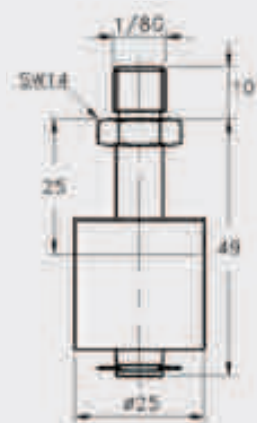

# OEM- / customer-specific designs

You have not found a device fulfilling all your requirements completely? No problem, we can modify the devices to your specific needs.

## I.) Optical customization

### - Colours of housing according to your wishes

If we have the colour in stock, we can change the default cover colour to your desired one.

For larger orders it is also possible to have the housings specifically manufactured to your wishes.

### - Modified label

Do you want your logo on the device or the type designation matching to your name policy?

## II.) Hardware and software modifications

To a certain extend the hardware or software can be modified to your requirements.

For example this are realized modifications to customer's specifications:

### - Modifying the hardware to another probe characteristic

### - Creating an additional material characteristic for the GMH 38xx - series

### - and many more

## III.) Customer-specific developments

If there is no device in our standard product proposal fulfilling your individual requirements, there is the possibility to develop a device according to your specifications.

*Please contact us, we'll do our best to fulfil your wishes ...*



Following the merger of the companies GREISINGER electronic, Honsberg Instruments and Martens Elektronik in 2009, GHM Messtechnik was established, thus providing enhanced competence for all aspects of measurement and industrial electronics. In March 2010, Imtron Messtechnik was integrated as fourth company into the GHM group.

With approx. 200 employees and more than 30 developers at the four locations Regenstauf, Remscheid, Barsbüttel and Owingen, we are offering an extensive product portfolio for the requirements of the following segments:

## Laboratory Measurement

### Industrial Electronics

### Process Engineering

### Industrial Measurement

### Test Bench Measurement

[www.ghm-messtechnik.de](http://www.ghm-messtechnik.de)



# Alphabetic Index

A-10	111	GES 130	126	GMI 15	22	GSMU ...	109	Hay temp. meas.	10
AAA-AKKU	61	GES 175 ...	124	GMK 38	25	GSN 24 ...	91	HLR 50 A	78
AAG2M	61	GES 401 ...	123	GMK 100	23	GSOFT 40K	94	IR-CT 20	107
AGL ...	137	GES 500	126	GMK 210	23	GSOFT 3050	62	K31, K32	74
AirCheck 100	44	GES 900	126	GMK 3810	26	GSP 91...	25	K48	75
AKL 1P	97	GEWAS 18 ...	141	GMNV-1C	144	GSS-F25	145	K50..	8
ALSCHU 300 ...	139	GEWAS 191 ...	142	GMR 110	26	GSS-1	142	KCL 3 M	36
ALSCHU 480 / 485	140	GEWAS 200	142	GMS 300/91	25	GST ...	25	KFZ 2000	65
Antenne GSM	98	GEWAS 300	143	GMSD ...	50/51	GST 3810	26	KM4P ...	116
APG ...	78	GFN ...	18	GMUD	110	GT1-CO	112	KOH 100	39
BaleCheck ...	27	GFTB 200 ...	20	GMV	141	GT10-CO2-1R	112	LAN 3100	98
CaCl	36	GFTH 95	19	GNG 05/5000	61	GTA 0420	80	LC ...	121
CR 2032	83	GFTH 200 ...	19	GNG 09	61	GTD 1100	55	LF ...	31
D53 TP50D	78	GGF 175	124	GNG 09-3.5KS	139	GTE 130 OK	127	LFE ...	115
D53-3P	78	GGF 200	127	GNG 10	61	GTF 35	123	MINAL ...	139
DFM 232 SET	98	GGO ...	43	GNG 10/3000	61	GTF 38	25	MINIDIN 4S	61
EAK 36	69	GHE 91	25	GNG 12-LE	98	GTF 55 B	35	MINISOFT	83
EASYBUS.DLL	97	GHTU ...	108	GNG 12/ ...	79	GTF 101	132	MODEM ...	98
EASYBus-Configurator	95	GIA 010 N ...	64	GNG 24/ ...	79	GTF 101 - Ex	131	MP 8082	78
EASYControl net	95	GIA 0420 N ...	64	GNG 220 ...	79	GTF 101-5/ ...	129	MSD ...	51
EASYLOG 24RFT ...	85	GIA 0420 VO ...	76	GNG 89 ...	61	GTF 101-N03 ...	130	MSK 100	41
EASYLOG 40BIN	86	GIA 0420 WKT ...	76	GNR 10	79	GTF 102	132	MT 400	14
EASYLOG 40IMP ...	84	GIA 20 EB ...	66	GNR 232A	98	GTF 102 - Ex	131	MU 500 ...	106
EASYLOG 40K ...	84	GIA 2000	69	GNS 20E ...	144	GTF 103	133	MWF 100	134
EASYLOG 40NS ...	85	GIA 2448 ...	65	GNS-1	142	GTF 103 - Ex	131	NKU 1200...	136
EASYLOG 80CL	86	GIM 530 MS	14	GNS-3P ...	145	GTF 103 OS	133	NKU 1700	136
EB 2000 MC	93	GIM 3590	15	GNS-KIT	121	GTF 103/RT420	104	NST 1...	136
EB 3000 ...	92	GIR 2000 Pt ...	73	GNS-C ...	120	GTF 104 ...	133	OB-700	135
EBB ... IN	97	GIR 230 ...	67	GNS-SCV ...	119	GTF 104 ...	133	OXY 36 ...	113
EBB ... OUT	98	GIR 2002	70	GNT 0520	109	GTF 175 ...	124	P2P, P3P, P4P	137
EBG-CO-1R	91	GIR 2002 NS / DIF ...	72	GNTP	102	GTF 199	73	PG 13.5	37
EBG-CO2-1R	91	GIR 2002 / SW	72	GOEL ...	43	GTF 200 Pt100 ...	132	PHL ...	35
EBHT ...	88	GIR 2002 PID	70	GOF 112 ...	135	GTF 230 S	67	ProfiLab-Expert	62, 97
EBN ...	90	GIR 2002 PID / SW	72	GOF 115 ...	135	GTF 300 ...	127	PW 25	23
EBS 20M / 60M	62	GITT 01 ...	105	GOF 120 ...	135	GTF 300 GS	127	R38	74
EBSK ...	97	GKF 125	126	GOF 130 ...	125	GTF 400	126	Rail adapter	103
EBT ...	89	GKF 250	127	GOF 175 ...	124	GTF 401 ...	123	RC-Glied	78
EBT-IF ...	90	GKK ...	60	GOF 200 HO	125	GTF 601 ...	123	rotaro3	59
EBUW 232 A	98	GKL ...	29	GOF 400 ...	125	GTF 900	126	RRI ...	117
EBW ...	96	GKN 3600	39	GOF 401 Mini	123	GTF 1000 AL	126	RT 420 ...	104
ecotach	59	GKS 3600	39	GOF 500 ...	125	GTF 1200 ...	126	RW-015HKL	120
EF...	116	GKV ...	136	GOF 900 HO	125	GTF 1400 B	130	RWI-016 ...	120
EL-USB-...	82	GLF 100 ...	29	GOK 91	25	GTF 2000 ...	124	S2P, S4P	137
EPI	118	GLF 175 ...	124	GOG ...	42	GTH 83 EG	68	S-10 ..., S-11 ...	111
ESA 100	41	GLF 401 Mini	123	GOO ...	43	GTH 175/Pt ...	9	SCX ...	80
ESA 369	43	GLG 1300	61	GOX 20	39	GTH 200 air	10	SET 38...	25
ESK-1	97	GLI 9V	61	GOX 100 ...	43	GTH 1150	12	ST 500 - Ex ...	106
EST...	137	GLMU ...	115	GPAD 38	25	GTH 1150 EG	68	ST 512	15
FCM...	117	GLP 91	25	GPB 3300	55	GTH 1170	12	ST ...	60
FH-Messing	118	GLS 500	127	GPD ...	80	GTH 2448/ ...	65	STE ...	18
FHK...	118	GMF 1... ..	130	GPF 100	36	GTL	136	STS ...	18
FS3T	66	GMF 2... ..	127	GPH 014 ...	38	GTL 130	126	T2P, T3P, T4P	137
G2P, G3P, G4P	137	GMF 3... ..	130	GPH ...	36	GTMU	101	T03 BU /WE	103
GAD ...	36	GMFL	137	GPHU 014 MP ...	114	GTMU - IF ...	103	TA 888	58
GAF 200	126	GMH 175	9	GPRT 1400 AN ...	38	GTMU-MP	100	TF 101 ...	134
GAK 9 V	61	GMH 1150	12	GPT ...	80	GTMU-OMU	101	TLK 43	75
GAK 1400	38	GMH 1170	12	GPV 220	80	GTMU-2R-OMU	101	TFS 0100 E	18
GAM 3000	61	GMH 1300	60	GR 10	79	GTO 130 OK	127	TF1 ...	107
GAS 100	41	GMH 2710 ...	8	GRA 010 VO	77	GTP	102	T-Logg 100 ...	82
GAS 3600	39	GMH 3000.DLL	62	GRA 0420 VO	77	GTP-SG	102	T-Logg 120 ...	83
GAZ-1	139	GMH 3111 ...	48	GRA 010 WK	77	GTS	18	T-Logg 160 ...	83
GB 9 V	41	GMH 3151 ...	49	GRA 0420 WK	77	GTT...	128	Typ electronic 0120	10
GBF 1550	130	GMH 3156 ...	49	GRF 200	127	GTT...	128	USB 100	83
GBS ...	110	GMH 3161 ...	52/53	GRHU ...	108	GTT...	128	USB 3100 N	61
GBSK 91	25	GMH 3181 ...	52/53	GRL 100	36	GTT...	128	USB 5100	61
GBSL 91	25	GMH 32 ...	11	GRMU 2000 MP	114	GTT...	128	USB-Adapter	61
GCO 100	41	GMH 33 ...	17	GRO 200 ...	132	GTT...	128	VD 120	36
GDH ... AN	56	GMH 3430	32	GRP 100	37	GTT...	128	VEKA ...	139
GDH 200 ...	54	GMH 35 ...	36	GRV 100	41	GTT...	128	VEKA 3105	61
GDUSB 1000	57	GMH 3610	39	GRS0 ...	97	GTT...	128	VISION 2008	119
GDZ ...	50/51	GMH 3630	39	GRS 31 ...	61	GTT...	128	VKA 1m	137
GE 014	37	GMH 3691 ...	42	GSA ...	61	GTT...	128	VSL 2P	97
GE 1...	36/37	GMH 3710 ...	7	GSAS-1S	139	GTT...	128	VTH 25MS-180	119
GEF 38	25	GMH 3750 ...	7	GSE 91	25	GTT...	128	WP ...	4
GEG 91	25	GMH 3810	26	GSF 40 ...	25	GTT...	128	ZOT 369	41
GEH 1	60	GMH 3830 ...	24	GSF 50 ...	25	GTT...	128		
GES 21K	126	GMH 3850	24	GSG 91	25	GTT...	128		
GES 38	25	GMH 51 ...	46/47	GSH 8922	58	GTT...	128		
		GMH 54 ...	30/31	GSKA 3600	39	GTT...	128		
		GMH 55 ...	34/35			GTT...	128		



Please visit our webside:  
**[www.greisinger.de](http://www.greisinger.de)**

- Launch of new products
- Price information
- Direct ordering facility
- Software download
- Instruction manual
- FAQ area

Catalog prices valid as of january 01.01.2013



Catalog is subject to technical and commercial changes!



**GREISINGER**  
— electronic —



GREISINGER electronic GmbH

D - 93128 Regenstauf • Hans-Sachs-Straße 26

 +49 (0) 94 02 / 93 83 - 0  [www.greisinger.de](http://www.greisinger.de)

 +49 (0) 94 02 / 93 83 - 33  [info@greisinger.de](mailto:info@greisinger.de)